

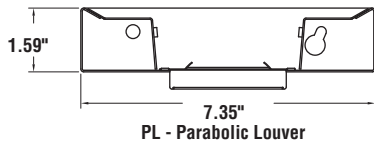


LINIARC® HORIZON LED

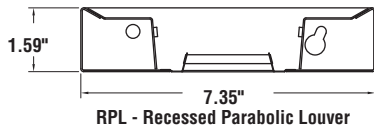

DIMENSIONS

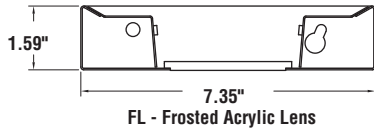

LIGHT OUTPUT - LED HRZ

HO - High Output	SW - 30K	WW - 35K	NW - 40K	Watts
PL - Parabolic Louver	4261	4393	4543	48
WPL - White Parabolic Louver	4318	4451	4603	48
RPL - Recessed Parabolic Louver	4228	4358	4507	48
WRPL - White Recessed Parabolic Louver	4458	4596	4753	48

LED Chips are frequently updated therefore values may increase.

ACCESSORIES - See Accessories page for End Cap, Hanging and Feed Options

US & Int'l. patents pending

PRODUCT HIGHLIGHTS

- LEDs - Use of closely-spaced medium power, high-brightness chips minimizes pixilation and provides uniform luminance. Available in Neutral White (4000K), Warm White (3500K), and Soft White (3000K) color temperatures. CRI >=80. LM-80 reports available.
- Multiple Shielding Options - Louvers are available in semi-specular or white aluminum and can be recessed (Standard) or protruding. A frosted acrylic lens is also available
- 4-Foot Incremental On-Grid Mounting - Fixtures are available in 4 and 8 foot lengths to match handling capabilities on job site. 4-foot increments allow the fixtures to be mounted on standard ceiling grids, no matter how long the row.
- Easy Cable Attachment - No locking plugs are needed with LiniArc fixtures. Hanging connections are secured by the end cap or the adjoining fixture.
- Less Installation Labor - Fixtures come with the connecting hardware pre-installed. Keyhole slots capture the joining screws and hold the fixture while the screws are tightened.
- Easy Two-Way Adjustment - Finger-action cable grippers on yoke mount allows simple height and side-to-side adjustment, and lock in place with a set screw. This allows the hangers to be pre-set to length on the ground prior to hanging the fixture.

EXPECTED LIFE - Projected life of at least 60,000 hours. Contact factory for TM-21 detail.

HOUSING - Die Formed 20-gauge steel. Textured white polyester powder coat finish

REFLECTOR - Die formed steel, high-reflectance white polyester powder coat finish.

LENS - Frosted Acrylic lens available

DRIVER - Solid-state Electronic. Universal voltage (120-277 VAC), 347 VAC. 0-10V dimming standard.

PHOTOMETRICS - Please visit our web site at www.lsi-industries.com for detailed photometric data.

WARRANTY - Limited 5-year warranty.

LISTING - U.L. listed to U.S. and Canadian safety standards.

This product, or selected versions of this product, meet the standards listed below. Please consult factory for your specific requirements.



LUMINAIRE ORDERING INFORMATION

TYPICAL ORDER EXAMPLE: **HRZ 8 LED PL HO SW S UE**

Prefix	Length	Light Source	Distribution	Shielding	Drive Current	Color Temperature	Circuiting	Emer Circuiting	Finish	Options	Voltage
HRZ - Horizon	4 8	LED	(Blank) 80% up; 20% down 60/40 60% up; 40% down 50/50 50% up; 50% down 30/70 30% up; 70% down 20/80 20% up; 80% down (Distribution patterns are nominal)	PL - Parabolic Louver (Standard) WPL - White Parabolic Louver RPL - Recessed Parabolic Louver WRPL - White Recessed Parabolic Louver	HO - High Output	SW - Soft White (3000K) NW - Neutral White (4000K) WW - Warm White (3500K)	S-Single	Blank - None EF - Separate Individual Emergency Feed EH - Dedicated Emergency Thru-Wire Harness ES - Emergency Feed Through Main Single Circuit Harness	WHT - White BLK - Black SLV - Silver	RAL - Custom Color (Specify - ex. RAL829) EC - Emergency Circuit Feed F - Fuse GMF - Slow-blow Fuse EM - Emergency Battery Pack	UE - Universal Electronic (120-277V) 347 - 347V



Project Name _____ Fixture Type _____
Catalog # _____

10/09/15
© 2015
LSI INDUSTRIES INC.