

# XDLM XDLS LED LIFESTYLE SERIES FIXTURE INSTALLATION INSTRUCTIONS

**IMPORTANT:** BEFORE PROCEEDING, READ ALL INSTRUCTIONS CAREFULLY TO INSURE PROPER AND SAFE INSTALLATION.  
**DANGER:** RISK OF SHOCK - DISCONNECT POWER BEFORE INSTALLATION.  
**DANGER:** RISQUE DE CHOC - COUPER L'ALIMENTATION AVANT L'INSTALLATION.  
**IMPORTANT:** HIGH TEMPERATURES INSIDE LUMINAIRE. MAKE CERTAIN SITE VOLTAGE MATCHES VOLTAGE MARKED ON LUMINAIRE.  
 THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.  
 CE PRODUIT DOIT ÊTRE INSTALLÉ SELON LE CODE D'INSTALLATION PERTINENT, PAR UNE PERSONNE QUI CONNÂIT BIEN LE PRODUIT ET SON FONCTIONNEMENT AIN SI QUE LES RISQUES INHÉRENTS.  
**NOTE:** IF FIXTURE LENS IS DIRTY, OPERATING LIFE AND PERFORMANCE WILL SIGNIFICANTLY DECREASE.  
**NOTE:** WIRING CONNECTIONS ARE TO BE MADE IN SUCH A MANNER SO AS TO EXCLUDE WATER FROM COMING IN CONTACT WITH WIRING OR CONNECTION SPLICES.


## **XDLM XDLS FIXTURE ASSEMBLY:**

**NOTE:** PACKAGING MATERIALS SHOULD BE USED TO PROTECT PAINT FINISH WHEN ASSEMBLING FIXTURE, MOUNTING BRACKET & POLE ON PARKING LOT SURFACE OR GROUND.

- ⚠ MAKE CERTAIN THE POWER SUPPLY IS TURNED OFF BEFORE STARTING INSTALLATION.
- ⚠ MAKE CERTAIN SITE VOLTAGE CORRESPONDS WITH FIXTURE DRIVER INPUT VOLTAGE PER FIXTURE RATINGS LABEL!
- ⚠ XDLM & XDLS MODELS ARE FULLY FACTORY ASSEMBLED & PRE-WIRED. NO ENTRY INTO THE FIXTURE IS REQUIRED DURING INSTALLATION!


1. SEE MOUNTING DEVICE INSTRUCTION SHEET FOR FIXTURE & BRACKET ASSEMBLY MOUNTING DETAILS. ATTACH FIXTURE ASSEMBLY AT CROWN TO MOUNTING BRACKET PER MOUNTING DEVICE ORDERED.

2" STAINLESS  
STEEL TENON  
MOUNT

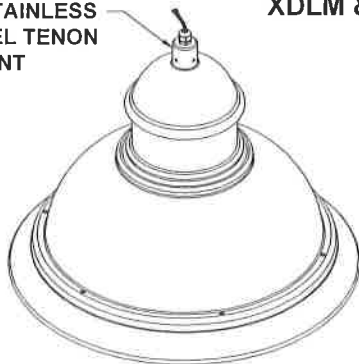


## **XDLM & XDLS TOP TENON MOUNT FIXTURES**

2" STAINLESS  
STEEL TENON  
MOUNT



1.25" STAINLESS  
STEEL TENON  
MOUNT




**XDLM B WITH 2" TOP TENON USED WITH THE FOLLOWING BRACKETS:**  
 XDLM/S BK CH S, XDLM/S BK CH D180,  
 XDLM BK UCL S, XDLM BK UCL D180 &  
 XDLM BK CH W


**XDLS A WITH 2" TOP TENON USED WITH THE FOLLOWING BRACKETS:**  
 XDLM/S BK CH S, XDLM/S BK CH D180

**XDLS A WITH 1.25" TOP TENON USED WITH THE FOLLOWING BRACKETS:**  
 XDLS BK CH W, XDLS BK PM, XDLS BK UCL S & XDLS BK UCL D180

## **XDLM & XDLS SIDE ARM MOUNT FIXTURES**

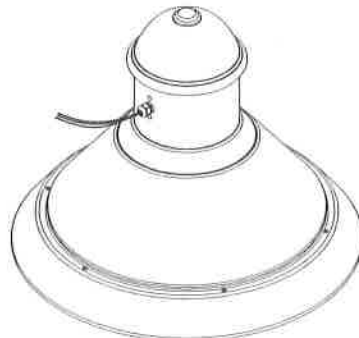

**XDLM A WITH SIDE ARM MOUNT USED WITH THE FOLLOWING BRACKETS:**  
 XDLM/S BK SA S, XDLM/S BK SA D180,  
 XDLM/S BK SA D90, XDLM/S BK SA T120,  
 XDLM/S BK SA Q90, & XDLM/S BK SA W




**XDLS A WITH SIDE ARM MOUNT USED WITH THE FOLLOWING BRACKETS:**  
 XDLM/S BK SA S, XDLM/S BK SA D180,  
 XDLM/S BK SA D90, XDLM/S BK SA T120,  
 XDLM/S BK SA Q90, & XDLM/S BK SA W



INSTALLATION QUESTIONS?  
 CALL LSI FIELD SERVICE  
 800-436-7800 EXT 3309  
 FAX 513-984-9723


# XDLM XDLS LED LIFESTYLE SERIES FIXTURE INSTALLATION INSTRUCTIONS

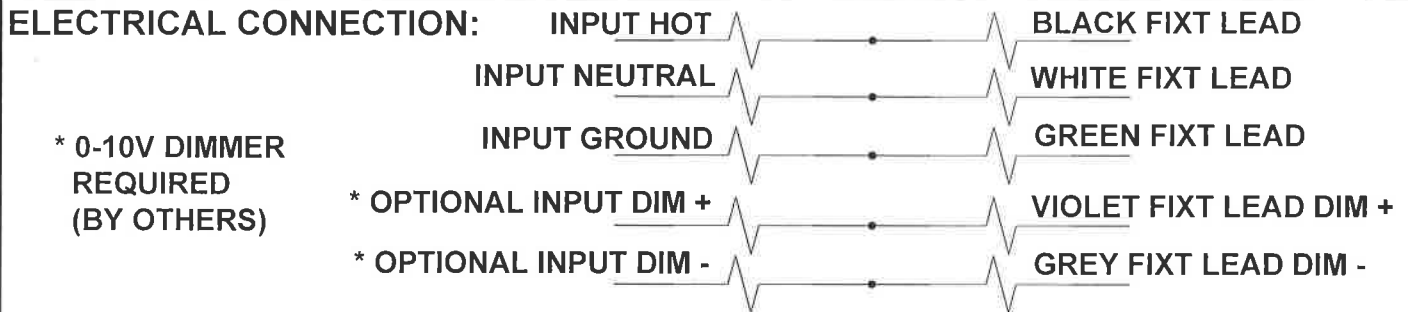


**WARNING:** VERIFY THE SITE INPUT VOLTAGE. MAKE SURE IT MATCHES THE VOLTAGE OF THE FIXTURE.  
SECURE ALL WIRING AND CONNECTIONS IN THE POLE, OR JUNCTION BOX.

**NOTE:** XDLM & XDLS -DIM OPTIONED FIXTURES MAY BE DIMMED USING 0-10V DIMMING CONTROLS (BY OTHERS).

## XDLM REFLECTOR MODULES SHOWING TYPICAL REFLECTOR ORIENTATION:

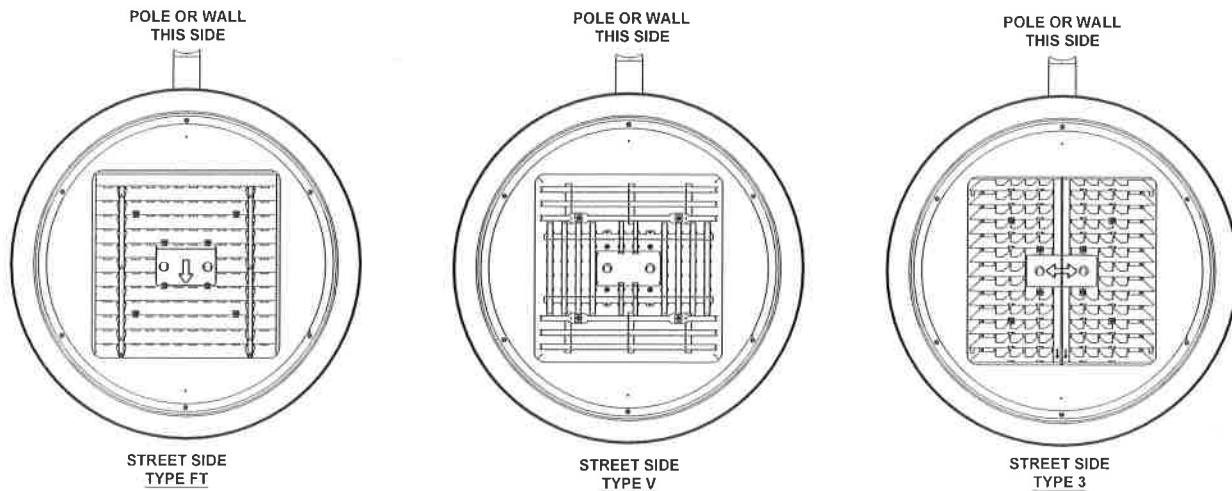

## XDLS REFLECTOR MODULES SHOWING TYPICAL REFLECTOR ORIENTATION:

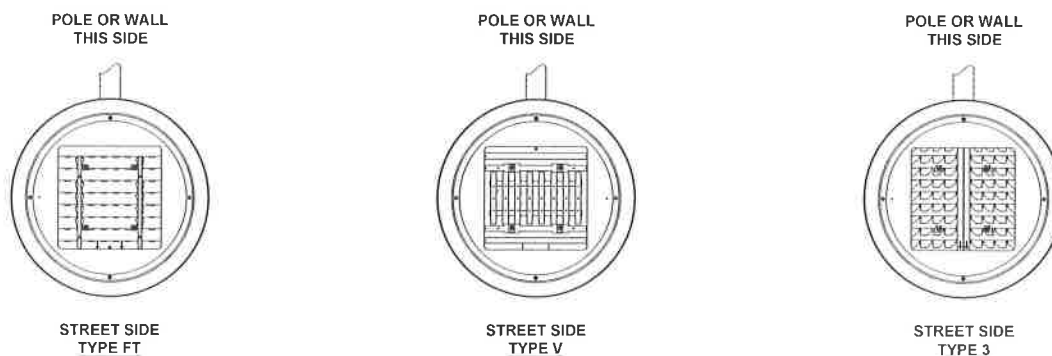

### MAINTENANCE:

THIS FIXTURE SHOULD BE PERIODICALLY MAINTAINED. INSECTS AND DEBRIS SHOULD NOT BE ALLOWED TO ACCUMULATE ON THE FIXTURE. THE LENS SHOULD BE CLEANED PERIODICALLY. IF SERVICE PARTS ARE REQUIRED A PARTS LIST CAN BE OBTAINED BY CONTACTING YOUR LOCAL DISTRIBUTOR OR CALLING LSI LIGHTING SOLUTIONS PLUS CUSTOMER SERVICE @ 800-436-7800. FAILURE TO FOLLOW THE MANUFACTURERS INSTRUCTIONS, OR MAKING ANY MODIFICATIONS TO THE PRODUCT CAN VOID THE WARRANTY. PRODUCT FAILURES RESULTING FROM POOR MAINTENANCE OR ABUSE WILL NOT BE COVERED BY WARRANTY. CONSULT WARRANTY FOR FULL DETAILS.