


# XALM / XMR MIRADA SERIES INTEGRAL LOUVER HOUSE SIDE SHIELD INSTALLATION AND ASSEMBLY INSTRUCTIONS

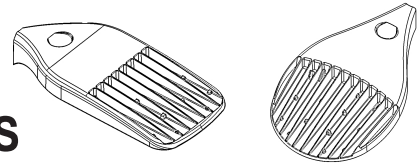


**WARNING - Risk of fire or electrical shock! Disconnect power before installing shield!**

**WARNING - Before proceeding, read all instructions carefully to ensure proper and safe installation!**

**\*\* NOTE: All images refer to XALM model, the XMR model is functionally identical! \*\***

1. Louver can only be mounted one way (follow illustration for proper mounting).
2. Kit will contain one Integral Louver Shield and 4 self tapping Philips head screws.
3. Align screw clearance holes in shield with the predrilled holes in the lens frame casting.
4. Using a Philips screwdriver, tighten screws to a Torque of 20 IN-LBS.
5. Installation of shield is now complete.

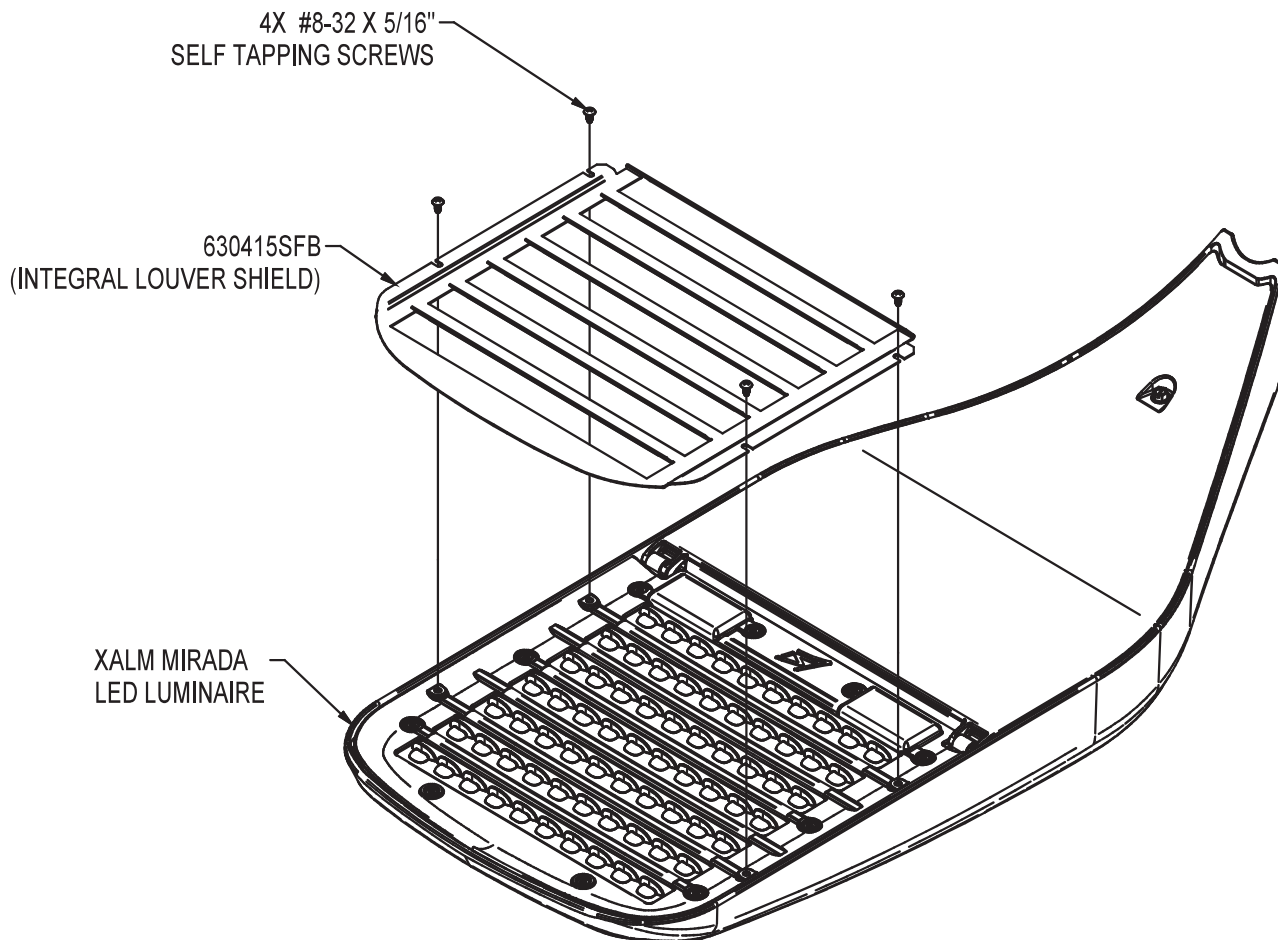

**Installation Questions?**  
Call LSI Field Service Department at:  
1-800-436-7800 Ext. 3300 Fax: (513)793-0147