




CRELX

Chicago Rated Edge-Lit LED Exit Sign



OVERVIEW	
Mounting Configurations	Ceiling, End, Wall, Recessed & Pendant
Character Style	6" Characters with 3/4" Stroke
Input VAC (Hz)	120-277 (50/60)
Battery (min)	LiFePO4 Battery (90)
Sign Face Material	Heat-Tempered Glass

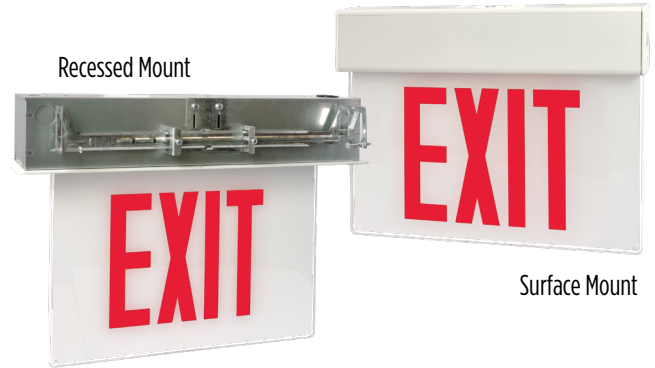

QUICK LINKS

FEATURES & SPECIFICATIONS

Construction

- Surface Mount and Pendant Mount: Extruded aluminum housing with white powder coated finish (steel canopy included).
- Recessed Mount: 20 Gauge steel housing with a white powder coated finish on an extruded aluminum trimplate (galvanized steel hanger bar assembly included).
- Impact and scratch-resistant, optical-grade acrylic panels with white background and red silk-screened lettering.
- Units come standard with the Single Face EXIT Less Arrows sign face panel.
- A multitude of replacement sign face accessories are available to select from, including EXIT and STAIRS configurations with directional arrows.

Optical System

- Legend illuminated by long-life, high intensity white LEDs.
- 6" characters with 3/4" stroke.

Battery

- Maintenance-free LiFePO4 battery.
- 5°C to 45°C (41°F to 113°F)

Electrical

- Universal Input Voltage - 120 to 277VAC at 50/60Hz.
- Low voltage disconnect eliminates deep discharge.
- Brownout protection.
- Test button to provide manual verification of the transfer circuit.

Installation

- Surface mounting can be ceiling, end or wall mounted (canopy included).
- Recessed mounting can be mounted into ceiling or wall.
- Pendant mount accomplished with optional Pendant Adapter accessory. Stem by others.

Warranty

- LSI luminaires carry a 5-year limited warranty. Refer to <https://www.lsicorp.com/resources/terms-conditions/warranty/> for more information.

Listings

- UL 924 Damp Location.
- Meets City of Chicago egress requirements.
- Meets or exceeds NFPA 101 and NEC.
- UL Listed 90 minute emergency run time, 24 hour recharge time.



CRELX Chicago Rated Edge-Lit LED Exit Sign

Type : _____

 Have questions? Call us at (800) 436-7800

ORDERING GUIDE

TYPICAL ORDER EXAMPLE: CRELX R R WB WH				
Prefix	Mounting	Sign Face ^{1,2}	Battery	Housing Finish
CRELX - Chicago Rated Edge-Lit Exit Sign	S - Surface (Canopy Included. Enables Pendant with Adapter Accessory)	R - Red Characters (Single Face EXIT Less Arrows)	LB - Less Battery (AC Only)	WH - White
	R - Recessed		WB - With Battery (LiFePO4 Battery)	



Need more information?
[Click here for our glossary](#)

Have additional questions?
Call us at (800) 436-7800

ACCESSORY ORDERING INFORMATION

Category	Part Number	Description
Replacement Sign Face Panels	916357	Single Face EXIT Less Arrows
	916358	Single Face EXIT Left Arrow ◀
	916359	Single Face EXIT Right Arrow ▶
	916360	Single Face Exit Dual Arrows ◀ ▶
	916361	Single Face STAIRS No Arrows
	916362	Single Face STAIRS Left Arrow ◀
	916363	Single Face STAIRS Right Arrow ▶
	916364	Single Face STAIRS Dual Arrows ◀ ▶
	916365	Dual Face EXIT Less Arrows
	916366	Dual Face EXIT with Dual Arrows ◀ ▶
	916367	Dual Face EXIT with Single Arrows ◀ or ▶
	916368	Dual Face STAIRS Less Arrows
	916369	Dual Face STAIRS with Dual Arrows ◀ ▶
	916370	Dual Face STAIRS with Single Arrows ◀ or ▶
Mounting	916371	CRELX Pendant Adaptor

- 1 All panels supplied with red letters on a white background.
- 2 Units come standard with the Single Face EXIT Less Arrows sign face panel. Replacement sign face panels are available as accessories and ship separately.

PRODUCT DIMENSIONS

