Catalog # : _____ Project : _____ Type : _____

Prepared By : _____ Date : _____

ELX

Premium Edge-Lit Exit Sign

damp location

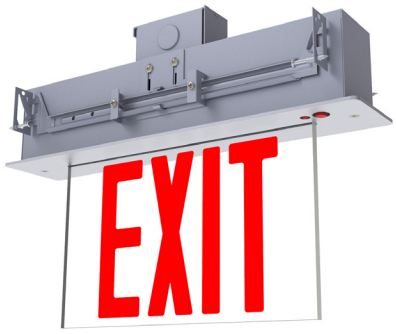



QUICK LINKS

Ordering Guide | Dimensions

FEATURES & SPECIFICATIONS

Construction

- Specification grade aluminum design with high-clarity acrylic panels
- All configurations include field-selectable directional chevrons
- Standard finish: White, Black, and Satin Aluminum

Optical System

- Illuminated by long-life, high intensity red or green LEDs
- Fully-illuminated 6” characters with 3/4” stroke

Electrical

- Standard Universal Voltage - 120/277VAC dual primary at 60Hz
- Solid-state transfer detects loss of line voltage and automatically switches to emergency mode (SD2 Only)
- Low voltage disconnect eliminates deep discharge
- Brownout circuit monitor
- Test button to provide manual verification of the transfer circuit and emergency lamps

Battery

- Maintenance-free NiCad batteries
- Operating Temperatures 10°C to 40°C (50°F to 104°F)

Installation

- Mouting Applications: ceiling recessed, wall recessed, surface ceiling, end, or wall mount

Warranty

- LSI luminaires carry a 5-year limited warranty. Refer to https://www.lsicorp.com/resources/terms-conditionswarranty/ for more information.

Listings

- UL 924
- NFPA 101
- NEC
- Damp Location Rated
- UL Listed 90 minute emergency run time, 24 hour recharge time

©LSI Industries Inc. All Rights Reserved. Specifications and dimensions subject to industry standard tolerances. Specifications subject to change without notice.

ELX Premium Edge-Lit Exit Sign

Type : _____

Have questions? Call us at (800) 436-7800

ORDERING GUIDE

Back to Quick Links

TYPICAL ORDER EXAMPLE: ELX D U WB RM WH USA

Prefix	# of Faces	Mounting	Power Source	Panel Color	Finish	Options
ELX - Premium Edge-Lit Exit Sign	**S** - Single Face **D** - Double Face[1]	**RE** - Recessed **U** - Universal Surface **WR** - Wall Recessed[2]	**LB** - AC Only **WB** - NiCad Battery **2CI** - 2 Circuit Input 120/277 VAC[3]	**GC** - Green Letters / Clear Panel **GM** - Green Letters / Mirror Panel **GW** - Green Letters / White Panel **RC** - Red Letters / Clear Panel **RM** - Red Letters / Mirror Panel **RW** - Red Letters / White Panel	**SA** - Satin Aluminum **BK** - Black **WH** - White	**SD2** - Self-test/Self-diagnostics[4] **IM** - Inverted Mount EXIT Panel[5] **USA** - Assembled in USA

Need more information?
Click here for our glossary

Have additional questions?
Call us at (800) 436-7800

ACCESSORY ORDERING INFORMATION[6]

Part Number	Order Number	Description
584435	**PK12**	1' Pendant Mount Kit
405732	**PK24**	2' Pendant Mount Kit

1 Double Face available with white or mirror panel only
2 Single Face, clear panels only (RC or GC), not a UL Listed option
3 2CI not available with SD2 option
4 Available with WB option only
5 Not available with WR mounting, IM is not a UL Listed option
6 Order as a separate line item, surface mount only

PRODUCT DIMENSIONS

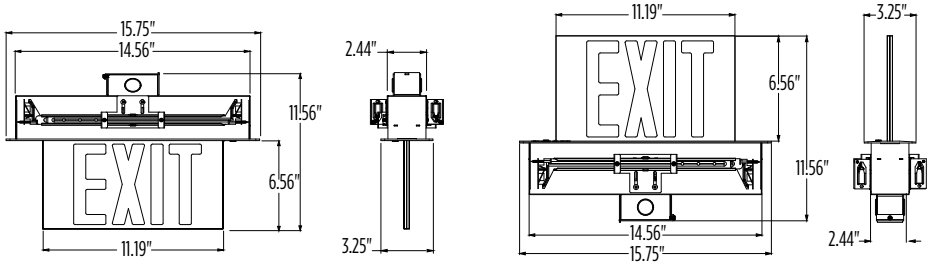

RE - Recessed



U - Universal Surface

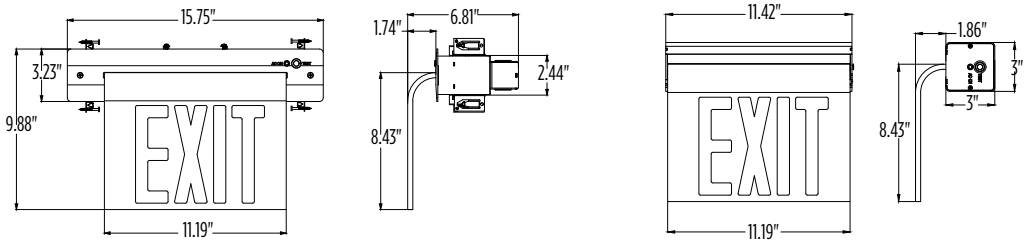

WRE - Wall Recessed

©LSI Industries Inc. All Rights Reserved. Specifications and dimensions subject to industry standard tolerances. Specifications subject to change without notice.