Catalog # : _____ Project : _____ Type : _____

Prepared By : _____ Date : _____

EX

Thermoplastic Exit Sign



FEATURES & SPECIFICATIONS

Construction

- Injection-molded UL 94 5VA flame retardant, high temperature, thermoplastic housing
- All configurations include field-selectable directional chevrons
- Universal design includes two faceplates, one backplate, and mounting canopy
- Standard finish: White and Black

Optical System

- Illuminated by long-life, high intensity red or green LEDs
- Fully-illuminated 6" characters with 3/4" stroke

Electrical

- Standard Universal Voltage - 120/277VAC dual primary at 60Hz
- Solid-state transfer detects loss of line voltage and automatically switches to emergency mode
- Low voltage disconnect eliminates deep discharge
- Test button to provide manual verification of the transfer circuit and emergency lamps

Battery

- Maintenance free NiCad Battery (WB only)
- Operating Temperatures 0°C to 40°C (32°F to 104°F)

Installation

- Includes mounting canopy for wall, ceiling, and end mount applications
- Universal J-box mounting pattern

Warranty

- 5 year warranty on all electronics and housing
- Separate 5 year pro-rated warranty on the battery

Listings

- UL 924
- NFPA 101
- NEC
- Damp Location Rated
- UL Listed 90 minute emergency run time, 24 hour recharge time

ORDERING GUIDE

TYPICAL ORDER EXAMPLE: EX R U WB WH SD2

Prefix	Letter Color	# of Faces	Battery	Housing Color	Options
EX- Thermoplastic Exit Sign	**R** - Red **G** - Green	**U** - Universal (includes two face plates, back plate, and mounting canopy)	**LB** - Less Battery (AC Only) **WB** - With Battery **2CI** - 2 Circuit Input[2]	**WH** - White **BK** - Black	**SD2** - Self Test / Self Diagnostic[1]

Need more information?
Click here for our glossary


Have additional questions?
Call us at (800) 436-7800

ACCESSORY ORDERING INFORMATION

Part Number	Order Number	Description
781384	WGB1	Wire Guard Back Mount
413080	PK1 WH	1' Pendant Kit White[3]
894762	PK1 BK	1' Pendant Kit black[3]
405732	PK2 WH	2' Pendant Kit White[3]
894761	PK2 BK	2' Pendant Kit Black[3]
740928	PGB1	Polycarbonate Guard Back Mount
566107	PGC1	Polycarbonate Guard Ceiling Mount
789448	VEPA	Pendant Adaptor

1 SD2 only available with WB option.
2 The AC and Auxiliary can both be connected and energized simultaneously.
3 Requires VEPA accessory.

PRODUCT DIMENSIONS

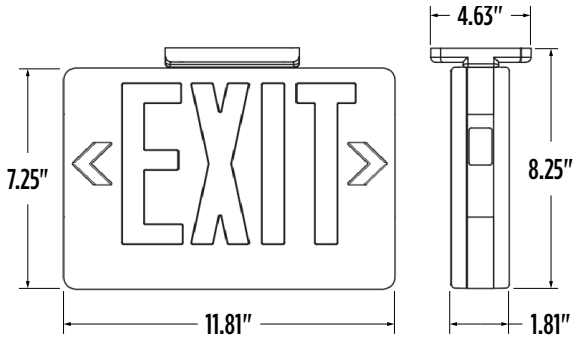

©LSI Industries Inc. All Rights Reserved. Specifications and dimensions subject to industry standard tolerances. Specifications subject to change without notice.