

Flood Lighting Positioning Guide

Four product families proving exceptional illumination for lighting signs, parking areas, flags, steeples, auto dealerships, building facades and even sport courts and fields

TLFL

TXFL


T2XFL


ZNF


TSFL

TMFL

- Energy efficient and contractor-friendly lighting solutions
- Knuckle, Trunnion, Slip Fitter, and Yoke mounting available
- Multiple distribuitons ranging from very narrow 2x2 optics all the way to very wide 7x7
- · Optional visors, shields, and guards available as well as varous accessories

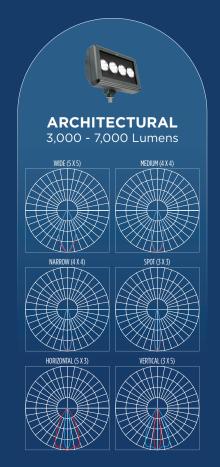

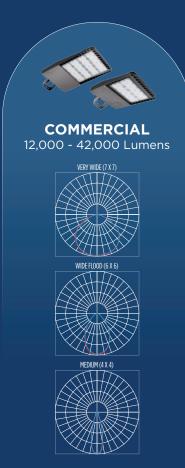

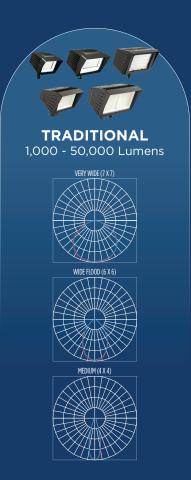



Flood Lighting Position Guide

















	Architectural (XFLM)	Traditional (TSFL)	Traditional (TMFL)	Traditional (TLFL)	Traditional (TXFL)	Traditional (T2XFL)	Commercial (SSA/SMA)	Zone (ZNF)
Markets	Automotive, Commercial, Grocery, Petroleum, QSR, Retail	Commercial, Grocery, Petroleum, Quick Serve Restaurants, Retail	Commercial, Grocery, Petroleum, Quick Serve Restaurants, Retail	Commercial, Grocery, Petroleum, Quick Serve Restaurants, Retail	Commercial, Grocery, Petroleum, Quick Serve Restaurants, Retail	Commercial, Grocery, Petroleum, Quick Serve Restaurants, Retail	Commercial, Industrial Manufacturing/Warehousing, Petroleum	Sports, Warehousing/Distribution
Size L x W x H	14" x 4-3/8" x 8-7/8	6.36 x 6.28 x 9.35	9.36 x 6.07 x 10.35	11.00 x 6.48 x 11.24	12 x 12.25 x 14.5	16 x 12.21 x 17.07	(SSA) 12-5/8 x 2-3/4 x 10-5/8 (SMA) 12-5/8 x 3 x 18-1/8	20.4 x 15 x 17.6
Weight	18 lbs	7 lbs	10 lbs	10 lbs	21 lbs	31 lbs	(SSA) 11 lbs (SMA) 16 lbs	42 lbs
Mounting Options	Yoke, Knuckle	Knuckle, Trunnion	Knuckle, Trunnion	Knuckle, Trunnion	Trunnion, Slip Fitter	Trunnion, Slip Fitter	Trunnion, Slip Fitter	Yoke
Mounting Accessories	Stanchion, Post-Top Adapter, J-Box, Wall Mount	Post Top Fitter	Post Top Fitter	Post Top Fitter	Trunnion, Slip Fitter	Trunnion, Slip Fitter	Slip Fitter, Yoke, Trunnion	Tenon Top Adapter
High Voltage	No	No	No	Yes	Yes	Yes	No	Yes
Lumen Range	3,500 - 7,000	1,000 - 3,000	4,000 - 7,000	9,000 - 16,000	20,000 - 25,000	33,000 - 50,000	12,000 - 42,000	70,000 - 100,000
LPW Range	90 - 125	93 - 125	97 - 121	119 - 157	137 - 154	132 - 153	(SSA) 110 - 119 (SMA) 110 - 127	160
P	IP66	Wet Location Listed	IP65	IP66				
DLC ¹	Standard	Standard	Standard	Standard	Premium	Premium	Premium	Standard
Lens/Optics	Glass/Acrilic	Glass/Acrilic	Glass/Acrilic	Glass/Acrilic	Glass/Acrilic	Glass/Acrilic	Polycarbonate	Polycarbonate
Distributions	HF, VF, MF, NF, WF, or SP	Flood, Extra wide	Medium, Wide, Very Wide	VNF, NF, MF, MWF				
CCT/CRI	3500K/70, 4000K/80, 3500K/80	3000K/70, 4000K/70, 5000K/70	4000K/70, 5000K/70	4000K/70, 5000K/70				
Paint Finishes	Bronze, Black, Platinum Plus, White, Graphite, Satin Verde Green, and Metallic Silver	Bronze, Black, White, Silver	Bronze, Black, White, Silver	Bronze, Black, White, Silver	Bronze, Black, White, Silver	Bronze, Black, White, Silver	Bronze	Black
Photocell	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No
Sensors & Controls	No	No	No	No	No	No	Yes	No
7-Pin Receptacle	No	No	No	No	Yes	Yes	Yes	
Surge Device	No	No	No	No	Yes	Yes	Optional	Yes
BAA	Yes	Yes	Yes	Yes	Yes	Yes	No	Yes
Price Per Lumen	\$\$\$	\$\$	\$\$	\$\$	\$\$	\$\$	\$	\$\$

1 Not all versions of this product may be qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified.

