



LiniArc® Wet Location (LAW2)

Uncompromising Performance & Aesthetics



OVERVIEW	
Lumen Package (lm/ft.)	300 - 1,500
Form Factors (ft.)	1, 2, 3, 4, 5, 6, 7, 8
Wattage (W)	8 - 206
Efficacy (LPW)	68 - 128
Fixture Weight lbs./ft. (kg/ft.)	3.0 (1.4)
Controls	IMS1, ALB, 3PC

QUICK LINKS

FEATURES & SPECIFICATIONS

Construction

- 1ft. to 8ft. length in 1ft. increments, 2" nominal width, 3" height (direct), 4" height (direct/indirect)
- Extruded Aluminum housing, Flush or Proud Acrylic cover lens
- Factory-sealed for Outdoor and Indoor applications. Dust and Bug tight. IP 66 rated.
- Operating temperature: -40F to 122F (-40C to 50C)*
- Post-painted for high quality finish.
- Continuous runs with single power feed
- Vandal resistant hardware for added safety, see installation guide for details.

Optical System

- Direct, Direct/Indirect or Indirect Illumination
- Symmetric, Asymmetric or Narrow beam distributions suitable for a wide range of applications
- Variable up/down distribution for maximum versatility
- Minimum color rendering index (CRI) of 80 for accurate color rendering. 90CRI available.

Continuous Run

- Continuous Runs Available for Rigid Stem, Cable (interior only), Wall & Mullion (Direct illumination only)
- Electrical connections external using IP66 fittings

- Position field must be specified

Electrical

- High-performance class 2 driver features overvoltage, under-voltage, short-circuit and over-temperature protection
- Universal Input Voltage (120-277V) or 347V
- 0-10V DIM to OFF (0% - 100%) standard. Compatible with most commercially available dimmers.
- L70 Calculated Life: >60k hours
- Power factor (PF): > 0.90
- Total harmonic distortion (THD): <20%
- Integral cold weather (7W) or standard (10W) emergency battery.

Controls

- Available with Standalone (IMS1) or Networked (AirLink Blue or 3rd party) Controls.
- ALB is a low-power wireless Bluetooth mesh control system. ALB provides significant energy savings while ensuring code compliance and security.

Installation

- Rigid stem, aircraft cable (indoor only), surface, recessed, wall or mullion mounting
- See ordering guide for mounting accessories (ordered separately) and install guide for instructions.

Warranty

- LSI luminaires carry a 5-year limited warranty. Refer to <https://www.lsicorp.com/resources/terms-conditions-warranty/> for more information.

Listings

- Certified to UL 1598 and UL 8750.
- Suitable for wet or damp locations.
- IP66 Ingress Protection Rating
- DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified.
- IDA compliant; with 3000K or lower color temperature selection.
- IK08 (proud lens) & IK07 (flush lens) Impact Rating
- Title 24 Compliant; see local ordinances for qualification information.
- Meets Buy American Act (BAA) and Build America, Buy America (BABA) requirements.

*Maximum ambient temperature for 15L lumen package is 95F (35C). For 12L 104F (40C) and for 10L or lower, 122F (50C).

ORDERING GUIDE (Accessories Must be Ordered Separately)

TYPICAL ORDER EXAMPLE: LAW2 W 8 12L 07L 840 CA N I UNV ALBCS GPT							
Prefix	Mounting (Horizontal only) ^{1,2}	Length (Ft.) ^{1,2,3}	Direct Lumens per Ft. ^{2,3,4}	Indirect Lumens per Ft. ^{2,3,4}	CCT & CRI ⁵	Lens ^{6,7}	Distribution ^{8,9}
LAW2 - LiniArc® 2" Wet Location	T - Rigid Stem (3/8")	1	0L - 100% Indirect	0L - 100% Direct	830	FA - Diffuse Flush Acrylic PA - 3/8" Diffuse Proud Acrylic CA - Clear Flush Acrylic	S - Wide Symmetric Lambertian N - Narrow Spot/Wall Graze A - Asymmetric/Forward Throw R - Asymmetric/Reverse Throw (Wall Wash) N, A, R distributions only available with CA lens
	S - Direct to Surface	2	03L - 300lm/ft.	03L - 300lm/ft.	835		
	W - Wall	3	05L - 500lm/ft.	05L - 500lm/ft.	840		
	R - Recessed	4	07L - 700lm/ft.	07L - 700lm/ft.	850		
	P - Aircraft Cable Pendant Drywall (Damp Loc. Use Only)	5	10L - 1,000lm/ft.	10L - 1,000lm/ft.	927		
	G - Aircraft Cable Pendant Grid (Damp Loc. Use Only)	6	12L - 1,200lm/ft.	12L - 1,200lm/ft.	930		
	7	15L - 1,500lm/ft.	15L - 1,500lm/ft.	935			
	8				940		
M - Mullion			0L (direct) - 0L (indirect) is not a valid combination		950		
					AMT - Narrow Band Amber (300lm/ft. Max) ¹⁶		
					AMB - Wide Amber (Phosphor Converted) ¹⁶		

Position ⁹	Input Voltage (V)	Controls ^{10,11}	Finish and Color ⁵	Options ^{12,13,14,15}
S - Starter (1x Feed Kit, 1x Non Feed Kit) J - Joiner (2x Non Feed Kit) E - Ender (1x Non Feed Kit) I - Individual (1x Feed Kit) End cap beauty plates ordered separately - see accessory ordering table	UNV - 120-277VAC HV - 347VAC	Blank - 0-10V Dimming Std. IMS1 - Standalone Motion and Bi-level Daylight Sensor (remote sold separately) ALBC - Integrated AirLink Blue Controller ALBCSD - Integrated AirLink Blue Motion and Daylight Harvesting up to 40ft. (Damp Loc) ALBCS - Integrated AirLink Blue Motion and Photocell up to 40ft. (Wet Loc) 3PC - Contact Factory for 3rd Party Controls Integration.	WHT - Matte White BLK - Matte Black MSV - Metallic Silver BRZ - Textured Dark Bronze GMG - Gun Metal Gray GPT - Graphite PLP - Platinum Plus SVG - Satin Verde Green RAL XXX - Custom	Blank - None SP1 - 10kV Surge Protection Device CWBB - 7W Cold Weather EM (-20C to 40C). See Notes for More Information. EM10 - 10W Standard EM (0 to 40C). See Notes for More Information. For Remote EM options up to 200W, see accessories ordering information.



Need more information?
[Click here for our glossary](#)

Have additional questions?
Call us at (800) 436-7800



1 Single feed continuous run available for direct only, stem, wall, or pendant mount.

2 1ft. configuration limited to 10L lumen package for direct or indirect only and 07L package for direct/indirect.

3 Direct/Indirect illumination only for Wall or Mullion mount.

4 03L and 05L lumen packages not available in 1ft or 2ft. lengths.

5 Contact factory for 90 CRI or custom finishes; extended lead times may apply. See CRI proration table.

6 Proud lens not offered for recessed mount configuration.

7 Asymmetric and Narrow Distributions available only with Clear Acrylic (CA) lens.

8 Distributions will be the same for Direct/Indirect configurations. Consult factory for other options.

9 Starter or Joiner configuration not available in 1ft.

10 Integral sensor will increase overall length by 3".

11 For integral controls on 1ft version, 3" box required.

12 Integral EM available with lengths 3ft. and longer, for 10L and lower lumen packages up to 104F (40C) ambient temperature. Integral EM not available for continuous run configurations.

13 Remote EM ships separate from fixture.

14 Not all combinations or options have DLC listing. Contact factory for details.

15 Surge Protector not available in 1ft length.

16 AMT max output 300lm/ft. AMB max output 500lm/ft. Contact factory for other constraints that may apply.

ORDERING GUIDE (Accessories Must be Ordered Separately)

ACCESSORIES ORDERING INFORMATION

Part Number	Description	Order Number
Emergency (Remote Only)	8W Remote EM (up to 60W input)	778196
	25W Remote EM (up to 200W input)	801387
	8W Remote EM (up to 60W input) with Grid Mount Kit	786277
Beauty Plate Set (XXX = Color Code) XXX = BLK, WHT, MSV, PLP, BRZ	Snap-in End Plate Hardware Covers, Direct Only, Flush Lens, Matching Paint Finish	815587XXX
	Snap-in End Plate Hardware Covers, Direct/Indirect, Flush Lens, Matching Paint Finish	817861XXX
	Snap-in End Plate Hardware Covers, Direct Only, Drop Lens, Matching Paint Finish	817856XXX
	Snap-in End Plate Hardware Covers, Direct/Indirect, Drop Lens, Matching Paint Finish	817917XXX
Canopy (5") Set Rigid Stem (XXX = Color Code) XXX = BLK, WHT, MSV, PLP, BRZ	Swivel Mount, 3/8 IP Bronze	835182XXX
Rigid Stem (Single, XX = Color Code) XXX = BL, WH, SLV, PLP, BZ	12" Stem 3/8 IP Bronze	M38265XX
	24" Stem 3/8 IP White	M38248XX
	36" Stem 3/8 IP White	M38175XX
	48" Stem 3/8 IP White	M38176XX
	60" Stem 3/8 IP White	M38301XX
Cable and Canopy Set (XXX = Color Code) XXX = BLK, WHT, MSV, PLP, BRZ	Aircraft Cable Kit 10ft. Drywall Mount, Includes Canopies - White (power cable not included)	826221XXX
	Aircraft Cable Kit 10ft. Grid Mount, Includes Canopies, Bronze (power cable not included)	826219XXX

Recommended Lumen Maintenance - LAW2 ²					
Ambient Temperature (C°)	Initial ¹	25K hrs. ³	50K hrs. ³	75K hrs. ⁴	100K hrs. ⁴
0	100%	96%	92%	88%	84%
10	100%	96%	92%	88%	84%
20	100%	96%	92%	88%	84%
25	100%	96%	92%	88%	84%
30	100%	96%	91%	87%	83%
40	100%	95%	91%	86%	82%
50	100%	95%	90%	85%	80%

Note: Maximum ambient temperature for 15L lumen package is 95F (35C). For 12L 104F (40C) and for 10L or lower, 122F (50C).

Lumen & Wattage Proration Factor	
03L	0.4
05L	0.7
07L	1.0

Note: 03L and 05L lumen packages not available in 1ft or 2ft. lengths.

CRI Proration Factor	
80	1.0
90	0.8


1 Electrical data at 25C (77F). Actual wattage may differ by +/-10%.

2 Lumen maintenance values at 40C are calculated per TM-21 based on LM-80 data and in-situ testing.

3 In accordance with IESNA TM-21-11, Projected Values represent interpolated value based on time durations that are within six times the IESNA LM-80-08 total test duration for the device under testing.

4 In accordance with IESNA TM-21-11, Calculated Values represent time durations that exceed six times the IESNA LM-80-08 total test duration for the device under testing.


OPTICAL DISTRIBUTIONS

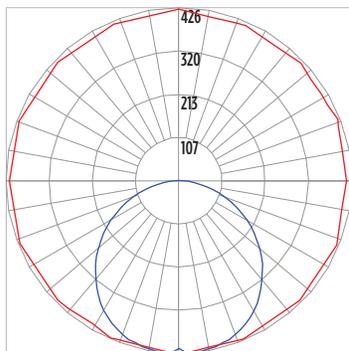

■ Vertical Plane ■ Horizontal Cone


LAW2-4-03L-OL-840-FA-S-UNV

Wide Symmetric Lambertian (S)	
NEMA Type	7 H x 7 V
Horizontal Beam Angle (50%)	108°
Vertical Beam Angle (50%)	114°
Horizontal Field Angle (10%)	167°
Vertical Field Angle (10%)	164°

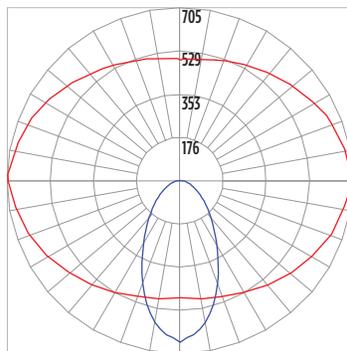


LAW2-4-03L-OL-840-CA-N-UNV

Narrow / Wall Graze (N)	
NEMA Type	7 H x 6 V
Horizontal Beam Angle (50%)	104°
Vertical Beam Angle (50%)	53°
Horizontal Field Angle (10%)	153°
Vertical Field Angle (10%)	124°

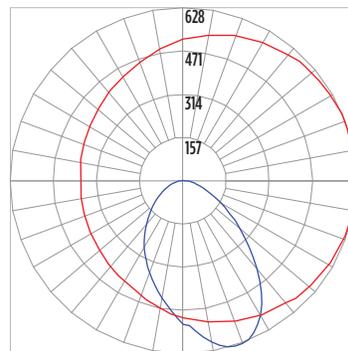

LAW2-4-03L-OL-840-CA-A-UNV

Asymmetric / Forward Throw (A)	
NEMA Type	7 H x 7 V
Horizontal Beam Angle (50%)	92°
Vertical Beam Angle (50%)	72°
Horizontal Field Angle (10%)	149°
Vertical Field Angle (10%)	141°

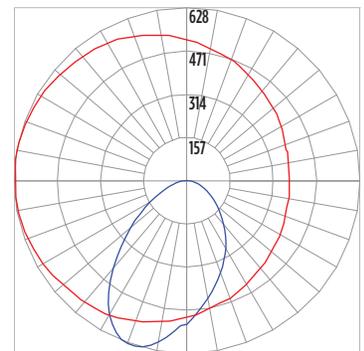

LAW2-4-03L-OL-840-CA-R-UNV

Wide Symmetric Lambertian (S)	
NEMA Type	7 H x 7 V
Horizontal Beam Angle (50%)	92°
Vertical Beam Angle (50%)	72°
Horizontal Field Angle (10%)	149°
Vertical Field Angle (10%)	141°

PERFORMANCE

Delivered Lumens - LAW2														
Length (ft.)	Lumen Package	Lens	Distribution	2700K 90CRI		3000K 80CRI		3500K 80CRI		4000K 80CRI		5000K 80CRI		Wattage
				Direct	Indirect									
1	07L	CA	A	558	-	697	-	742	-	765	-	757	-	8
				-	558	-	697	-	742	-	765	-	757	
				558	558	697	697	742	742	765	765	757	757	
			N	566	-	707	-	753	-	776	-	768	-	8
				-	566	-	707	-	753	-	776	-	768	
				566	566	707	707	753	753	776	776	768	768	
		FA	S	547	-	683	-	728	-	750	-	742	-	8
				-	547	-	683	-	728	-	750	-	742	
				547	547	683	683	728	728	750	750	742	742	
			PA	573	-	716	-	763	-	786	-	778	-	8
				-	573	-	716	-	763	-	786	-	778	
				573	573	716	716	763	763	786	786	778	778	
1	10L	CA	A	713	-	891	-	949	-	978	-	968	-	10
				-	713	-	891	-	949	-	978	-	968	
			N	724	-	904	-	963	-	993	-	982	-	
				-	724	-	904	-	963	-	993	-	982	
		FA	S	699	-	873	-	930	-	959	-	949	-	
				-	699	-	873	-	930	-	959	-	949	
				699	699	873	873	930	930	959	959	949	949	
			PA	733	-	916	-	976	-	1,006	-	995	-	
				-	733	-	916	-	976	-	1,006	-	995	
				733	733	916	916	976	976	1,006	1,006	995	995	
2	07L	CA	A	1,007	-	1,258	-	1,340	-	1,381	-	1,367	-	12
				-	1,007	-	1,258	-	1,340	-	1,381	-	1,367	
				1,007	1,007	1,258	1,258	1,340	1,340	1,381	1,381	1,367	1,367	
			N	1,022	-	1,277	-	1,360	-	1,402	-	1,387	-	12
				-	1,022	-	1,277	-	1,360	-	1,402	-	1,387	
				1,022	1,022	1,277	1,277	1,360	1,360	1,402	1,402	1,387	1,387	
		FA	S	987	-	1,233	-	1,314	-	1,354	-	1,339	-	12
				-	987	-	1,233	-	1,314	-	1,354	-	1,339	
				987	987	1,233	1,233	1,314	1,314	1,354	1,354	1,339	1,339	
			PA	1,035	-	1,293	-	1,377	-	1,420	-	1,405	-	12
				-	1,035	-	1,293	-	1,377	-	1,420	-	1,405	
				1,035	1,035	1,293	1,293	1,377	1,377	1,420	1,420	1,405	1,405	
2	10L	CA	A	1,450	-	1,811	-	1,929	-	1,989	-	1,967	-	18
				-	1,450	-	1,811	-	1,929	-	1,989	-	1,967	
				1,450	1,450	1,811	1,811	1,929	1,929	1,989	1,989	1,967	1,967	
			N	1,471	-	1,837	-	1,957	-	2,018	-	1,996	-	18
				-	1,471	-	1,837	-	1,957	-	2,018	-	1,996	
				1,471	1,471	1,837	1,837	1,957	1,957	2,018	2,018	1,996	1,996	
		FA	S	1,421	-	1,775	-	1,891	-	1,949	-	1,928	-	18
				-	1,421	-	1,775	-	1,891	-	1,949	-	1,928	
				1,421	1,421	1,775	1,775	1,891	1,891	1,949	1,949	1,928	1,928	
			PA	1,490	-	1,861	-	1,983	-	2,044	-	2,022	-	18
				-	1,490	-	1,861	-	1,983	-	2,044	-	2,022	
				1,490	1,490	1,861	1,861	1,983	1,983	2,044	2,044	2,022	2,022	

PERFORMANCE

Delivered Lumens - LAW2																
Length (ft.)	Lumen Package	Lens	Distribution	2700K 90CRI		3000K 80CRI		3500K 80CRI		4000K 80CRI		5000K 80CRI		Wattage		
				Direct	Indirect											
2	12L	CA	A	1,639	-	2,048	-	2,182	-	2,249	-	2,225	-	21		
				-	1,639	-	2,048	-	2,182	-	2,249	-	2,225			
				1,639	1,639	2,048	2,048	2,182	2,182	2,249	2,249	2,225	2,225			
				1,663	-	2,078	-	2,213	-	2,282	-	2,257	-			
			N	-	1,663	-	2,078	-	2,213	-	2,282	-	2,257	-	21	
				1,663	1,663	2,078	2,078	2,213	2,213	2,282	2,282	2,257	2,257			
				1,607	-	2,007	-	2,138	-	2,204	-	2,180	-	21		
				-	1,607	-	2,007	-	2,138	-	2,204	-	2,180			
		S	1,607	1,607	2,007	2,007	2,138	2,138	2,204	2,204	2,180	2,180				
			1,685	-	2,105	-	2,242	-	2,311	-	2,286	-	21			
		PA	-	1,685	-	2,105	-	2,242	-	2,311	-	2,286				
			1,685	1,685	2,105	2,105	2,242	2,242	2,311	2,311	2,286	2,286				
		2	15L	CA	A	2,163	-	2,702	-	2,878	-	2,967	-	2,935	-	27
						-	2,163	-	2,702	-	2,878	-	2,967	-	2,935	
2,163	2,163					2,702	2,702	2,878	2,878	2,967	2,967	2,935	2,935			
2,195	-					2,742	-	2,920	-	3,010	-	2,978	-	27		
N	-				2,195	-	2,742	-	2,920	-	3,010	-	2,978			
	2,195				2,195	2,742	2,742	2,920	2,920	3,010	3,010	2,978	2,978			
FA	2,120				-	2,648	-	2,821	-	2,908	-	2,877	-	27		
	-				2,120	-	2,648	-	2,821	-	2,908	-	2,877			
S	2,120			2,120	2,648	2,648	2,821	2,821	2,908	2,908	2,877	2,877				
	2,223			-	2,777	-	2,958	-	3,049	-	3,016	-	27			
PA	-			2,223	-	2,777	-	2,958	-	3,049	-	3,016				
	2,223			2,223	2,777	2,777	2,958	2,958	3,049	3,049	3,016	3,016				
3	07L			CA	A	1,549	-	1,935	-	2,061	-	2,124	-	2,101	-	18
						-	1,549	-	1,935	-	2,061	-	2,124	-	2,101	
		1,549	1,549			1,935	1,935	2,061	2,061	2,124	2,124	2,101	2,101			
		1,571	-			1,963	-	2,091	-	2,155	-	2,132	-	18		
		N	-		1,571	-	1,963	-	2,091	-	2,155	-	2,132			
			1,571		1,571	1,963	1,963	2,091	2,091	2,155	2,155	2,132	2,132			
		FA	1,518		-	1,896	-	2,020	-	2,082	-	2,060	-	18		
			-		1,518	-	1,896	-	2,020	-	2,082	-	2,060			
		S	1,518	1,518	1,896	1,896	2,020	2,020	2,082	2,082	2,060	2,060				
			1,592	-	1,988	-	2,118	-	2,183	-	2,160	-	18			
		PA	-	1,592	-	1,988	-	2,118	-	2,183	-	2,160				
			1,592	1,592	1,988	1,988	2,118	2,118	2,183	2,183	2,160	2,160				
		3	10L	CA	A	2,213	-	2,764	-	2,945	-	3,035	-	3,003	-	26
						-	2,213	-	2,764	-	2,945	-	3,035	-	3,003	
2,213	2,213					2,764	2,764	2,945	2,945	3,035	3,035	3,003	3,003			
2,245	-					2,805	-	2,988	-	3,080	-	3,047	-	26		
N	-				2,245	-	2,805	-	2,988	-	3,080	-	3,047			
	2,245				2,245	2,805	2,805	2,988	2,988	3,080	3,080	3,047	3,047			
FA	2,169				-	2,709	-	2,886	-	2,975	-	2,943	-	26		
	-				2,169	-	2,709	-	2,886	-	2,975	-	2,943			
S	2,169			2,169	2,709	2,709	2,886	2,886	2,975	2,975	2,943	2,943				
	2,274			-	2,841	-	3,026	-	3,119	-	3,086	-	26			
PA	-			2,274	-	2,841	-	3,026	-	3,119	-	3,086				
	2,274			2,274	2,841	2,841	3,026	3,026	3,119	3,119	3,086	3,086				

PERFORMANCE

Delivered Lumens - LAW2																
Length (ft.)	Lumen Package	Lens	Distribution	2700K 90CRI		3000K 80CRI		3500K 80CRI		4000K 80CRI		5000K 80CRI		Wattage		
				Direct	Indirect											
3	12L	CA	A	2,641	-	3,300	-	3,515	-	3,623	-	3,584	-	31		
				-	2,641	-	3,300	-	3,515	-	3,623	-	3,584			
				2,641	2,641	3,300	3,300	3,515	3,515	3,623	3,623	3,584	3,584			
				2,680	-	3,348	-	3,566	-	3,676	-	3,637	-			
			N	-	2,680	-	3,348	-	3,566	-	3,676	-	3,637	-	31	
				2,680	2,680	3,348	3,348	3,566	3,566	3,676	3,676	3,637	3,637			
				2,589	-	3,234	-	3,445	-	3,551	-	3,513	-	31		
				-	2,589	-	3,234	-	3,445	-	3,551	-	3,513			
		S	2,589	2,589	3,234	3,234	3,445	3,445	3,551	3,551	3,513	3,513				
			2,714	-	3,391	-	3,612	-	3,723	-	3,683	-	31			
			-	2,714	-	3,391	-	3,612	-	3,723	-	3,683				
			2,714	2,714	3,391	3,391	3,612	3,612	3,723	3,723	3,683	3,683				
		PA	S	-	2,714	-	3,391	-	3,612	-	3,723	-	3,683	-	31	
				2,714	2,714	3,391	3,391	3,612	3,612	3,723	3,723	3,683	3,683			
3	15L	CA	A	3,311	-	4,136	-	4,406	-	4,541	-	4,493	-	39		
				-	3,311	-	4,136	-	4,406	-	4,541	-	4,493			
				3,311	3,311	4,136	4,136	4,406	4,406	4,541	4,541	4,493	4,493			
				3,359	-	4,196	-	4,470	-	4,608	-	4,558	-			
			N	-	3,359	-	4,196	-	4,470	-	4,608	-	4,558	-	39	
				3,359	3,359	4,196	4,196	4,470	4,470	4,608	4,608	4,558	4,558			
				3,245	-	4,054	-	4,318	-	4,451	-	4,403	-	39		
				-	3,245	-	4,054	-	4,318	-	4,451	-	4,403			
		S	3,245	3,245	4,054	4,054	4,318	4,318	4,451	4,451	4,403	4,403				
			3,402	-	4,250	-	4,528	-	4,667	-	4,617	-	39			
			-	3,402	-	4,250	-	4,528	-	4,667	-	4,617				
			3,402	3,402	4,250	4,250	4,528	4,528	4,667	4,667	4,617	4,617				
		4	07L	CA	A	2,110	-	2,635	-	2,807	-	2,894	-	2,863	-	24
						-	2,110	-	2,635	-	2,807	-	2,894	-	2,863	
2,110	2,110					2,635	2,635	2,807	2,807	2,894	2,894	2,863	2,863			
2,140	-					2,674	-	2,848	-	2,936	-	2,904	-			
N	-				2,140	-	2,674	-	2,848	-	2,936	-	2,904	-	24	
	2,140				2,140	2,674	2,674	2,848	2,848	2,936	2,936	2,904	2,904			
	2,068				-	2,583	-	2,751	-	2,836	-	2,806	-	24		
	-				2,068	-	2,583	-	2,751	-	2,836	-	2,806			
S	2,068			2,068	2,583	2,583	2,751	2,751	2,836	2,836	2,806	2,806				
	2,168			-	2,708	-	2,885	-	2,974	-	2,942	-	24			
	-			2,168	-	2,708	-	2,885	-	2,974	-	2,942				
	2,168			2,168	2,708	2,708	2,885	2,885	2,974	2,974	2,942	2,942				
4	10L			CA	A	2,933	-	3,664	-	3,903	-	4,023	-	3,980	-	33
						-	2,933	-	3,664	-	3,903	-	4,023	-	3,980	
		2,933	2,933			3,664	3,664	3,903	3,903	4,023	4,023	3,980	3,980			
		2,976	-			3,717	-	3,960	-	4,082	-	4,038	-			
		N	-		2,976	-	3,717	-	3,960	-	4,082	-	4,038	-	33	
			2,976		2,976	3,717	3,717	3,960	3,960	4,082	4,082	4,038	4,038			
			2,875		-	3,591	-	3,825	-	3,943	-	3,901	-	33		
			-		2,875	-	3,591	-	3,825	-	3,943	-	3,901			
		S	2,875	2,875	3,591	3,591	3,825	3,825	3,943	3,943	3,901	3,901				
			3,014	-	3,765	-	4,011	-	4,134	-	4,090	-	33			
			-	3,014	-	3,765	-	4,011	-	4,134	-	4,090				
			3,014	3,014	3,765	3,765	4,011	4,011	4,134	4,134	4,090	4,090				

PERFORMANCE

Delivered Lumens - LAW2																
Length (ft.)	Lumen Package	Lens	Distribution	2700K 90CRI		3000K 80CRI		3500K 80CRI		4000K 80CRI		5000K 80CRI		Wattage		
				Direct	Indirect											
4	12L	CA	A	3,541	-	4,424	-	4,712	-	4,858	-	4,806	-	40		
				-	3,541	-	4,424	-	4,712	-	4,858	-	4,806			
				3,541	3,541	4,424	4,424	4,712	4,712	4,858	4,858	4,806	4,806			
			N	3,593	-	4,489	-	4,781	-	4,928	-	4,876	-	40		
				-	3,593	-	4,489	-	4,781	-	4,928	-	4,876			
				3,593	3,593	4,489	4,489	4,781	4,781	4,928	4,928	4,876	4,876			
		FA	S	3,471	-	4,336	-	4,619	-	4,761	-	4,710	-	40		
				-	3,471	-	4,336	-	4,619	-	4,761	-	4,710			
			S	3,471	3,471	4,336	4,336	4,619	4,619	4,761	4,761	4,710	4,710	80		
				3,639	-	4,546	-	4,843	-	4,992	-	4,939	-		40	
		PA	S	-	3,639	-	4,546	-	4,843	-	4,992	-	4,939	80		
				3,639	3,639	4,546	4,546	4,843	4,843	4,992	4,992	4,939	4,939			
		4	15L	CA	A	4,457	-	5,568	-	5,931	-	6,114	-	6,048	-	52
						-	4,457	-	5,568	-	5,931	-	6,114	-	6,048	
4,457	4,457					5,568	5,568	5,931	5,931	6,114	6,114	6,048	6,048			
N	4,522				-	5,649	-	6,017	-	6,203	-	6,136	-	52		
	-				4,522	-	5,649	-	6,017	-	6,203	-	6,136			
	4,522				4,522	5,649	5,649	6,017	6,017	6,203	6,203	6,136	6,136			
FA	S			4,368	-	5,457	-	5,813	-	5,992	-	5,671	-	52		
				-	4,368	-	5,457	-	5,813	-	5,992	-	5,671			
	S			4,368	4,368	5,457	5,457	5,813	5,813	5,992	5,992	5,671	5,671	104		
				4,580	-	5,722	-	6,095	-	6,283	-	6,216	-		52	
PA	S			-	4,580	-	5,722	-	6,095	-	6,283	-	6,216	104		
				4,580	4,580	5,722	5,722	6,095	6,095	6,283	6,283	6,216	6,216			
5	07L			CA	A	2,600	-	3,249	-	3,460	-	3,567	-	3,529	-	30
						-	2,600	-	3,249	-	3,460	-	3,567	-	3,529	
		2,600	2,600			3,249	3,249	3,460	3,460	3,567	3,567	3,529	3,529			
		N	2,579		-	3,222	-	3,432	-	3,538	-	3,500	-	30		
			-		2,579	-	3,222	-	3,432	-	3,538	-	3,500			
			2,579		2,579	3,222	3,222	3,432	3,432	3,538	3,538	3,500	3,500			
		FA	S	2,452	-	3,064	-	3,263	-	3,364	-	3,328	-	30		
				-	2,452	-	3,064	-	3,263	-	3,364	-	3,328			
			S	2,452	2,452	3,064	3,064	3,263	3,263	3,364	3,364	3,328	3,328	60		
				2,579	-	3,222	-	3,432	-	3,538	-	3,500	-		30	
		PA	S	-	2,579	-	3,222	-	3,432	-	3,538	-	3,500	60		
				2,579	2,579	3,222	3,222	3,432	3,432	3,538	3,538	3,500	3,500			
		5	10L	CA	A	3,766	-	4,705	-	5,012	-	5,166	-	5,111	-	41
						-	3,766	-	4,705	-	5,012	-	5,166	-	5,111	
3,766	3,766					4,705	4,705	5,012	5,012	5,166	5,166	5,111	5,111			
N	3,705				-	4,628	-	4,930	-	5,082	-	5,028	-	41		
	-				3,705	-	4,628	-	4,930	-	5,082	-	5,028			
	3,705				3,705	4,628	4,628	4,930	4,930	5,082	5,082	5,028	5,028			
FA	S			3,705	-	4,628	-	4,930	-	5,082	-	5,028	-	41		
				-	3,705	-	4,628	-	4,930	-	5,082	-	5,028			
	S			3,705	3,705	4,628	4,628	4,930	4,930	5,082	5,082	5,028	5,028	82		
				3,858	-	4,820	-	5,134	-	5,292	-	5,235	-		41	
PA	S			-	3,858	-	4,820	-	5,134	-	5,292	-	5,235	82		
				3,858	3,858	4,820	4,820	5,134	5,134	5,292	5,292	5,235	5,235			

PERFORMANCE

Delivered Lumens - LAW2																	
Length (ft.)	Lumen Package	Lens	Distribution	2700K 90CRI		3000K 80CRI		3500K 80CRI		4000K 80CRI		5000K 80CRI		Wattage			
				Direct	Indirect												
5	12L	CA	A	4,587	-	5,730	-	6,104	-	6,292	-	6,225	-	50			
				-	4,587	-	5,730	-	6,104	-	6,292	-	6,225				
				4,587	4,587	5,730	5,730	6,104	6,104	6,292	6,292	6,225	6,225				
				4,622	-	5,774	-	6,151	-	6,340	-	6,272	-				
			N	-	4,622	-	5,774	-	6,151	-	6,340	-	6,272	-	50		
				4,622	4,622	5,774	5,774	6,151	6,151	6,340	6,340	6,272	6,272				
				4,511	-	5,636	-	6,003	-	6,188	-	6,122	-	50			
				-	4,511	-	5,636	-	6,003	-	6,188	-	6,122				
		S	4,511	4,511	5,636	5,636	6,003	6,003	6,188	6,188	6,122	6,122	100				
			4,701	-	5,872	-	6,255	-	6,448	-	6,379	-	50				
			-	4,701	-	5,872	-	6,255	-	6,448	-	6,379					
			4,701	4,701	5,872	5,872	6,255	6,255	6,448	6,448	6,379	6,379	100				
			5	15L	CA	A	5,282	-	6,598	-	7,028	-	7,245	-	7,167	-	65
							-	5,282	-	6,598	-	7,028	-	7,245	-	7,167	
5,282	5,282	6,598					6,598	7,028	7,028	7,245	7,245	7,167	7,167				
5,497	-	6,867					-	7,315	-	7,540	-	7,459	-	65			
N	-	5,497				-	6,867	-	7,315	-	7,540	-	7,459				
	5,497	5,497				6,867	6,867	7,315	7,315	7,540	7,540	7,459	7,459				
	5,355	-				6,689	-	7,126	-	7,345	-	7,266	-		65		
	-	5,355				-	6,689	-	7,126	-	7,345	-	7,266				
S	5,355	5,355			6,689	6,689	7,126	7,126	7,345	7,345	7,266	7,266	130				
	5,544	-			6,926	-	7,378	-	7,605	-	7,523	-	65				
	-	5,544			-	6,926	-	7,378	-	7,605	-	7,523					
	5,544	5,544			6,926	6,926	7,378	7,378	7,605	7,605	7,523	7,523	130				
	6	07L			CA	A	3,228	-	4,033	-	4,296	-	4,428	-	4,381	-	35
							-	3,228	-	4,033	-	4,296	-	4,428	-	4,381	
3,228			3,228	4,033			4,033	4,296	4,296	4,428	4,428	4,381	4,381				
3,202			-	4,000			-	4,261	-	4,392	-	4,345	-	35			
N			-	3,202		-	4,000	-	4,261	-	4,392	-	4,345				
			3,202	3,202		4,000	4,000	4,261	4,261	4,392	4,392	4,345	4,345				
			3,044	-		3,803	-	4,051	-	4,176	-	4,131	-		35		
			-	3,044		-	3,803	-	4,051	-	4,176	-	4,131				
S			3,044	3,044	3,803	3,803	4,051	4,051	4,176	4,176	4,131	4,131	70				
			3,201	-	3,999	-	4,260	-	4,391	-	4,344	-	35				
			-	3,201	-	3,999	-	4,260	-	4,391	-	4,344					
			3,201	3,201	3,999	3,999	4,260	4,260	4,391	4,391	4,344	4,344	70				
			6	10L	CA	A	4,573	-	5,713	-	6,086	-	6,273	-	6,206	-	49
							-	4,573	-	5,713	-	6,086	-	6,273	-	6,206	
4,573	4,573	5,713					5,713	6,086	6,086	6,273	6,273	6,206	6,206				
4,499	-	5,620					-	5,987	-	6,171	-	6,105	-	49			
N	-	4,499				-	5,620	-	5,987	-	6,171	-	6,105				
	4,499	4,499				5,620	5,620	5,987	5,987	6,171	6,171	6,105	6,105				
	4,499	-				5,620	-	5,987	-	6,171	-	6,105	-		49		
	-	4,499				-	5,620	-	5,987	-	6,171	-	6,105				
S	4,499	4,499			5,620	5,620	5,987	5,987	6,171	6,171	6,105	6,105	98				
	4,685	-			5,852	-	6,234	-	6,426	-	6,357	-	49				
	-	4,685			-	5,852	-	6,234	-	6,426	-	6,357					
	4,685	4,685			5,852	5,852	6,234	6,234	6,426	6,426	6,357	6,357	98				

PERFORMANCE

Delivered Lumens - LAW2																
Length (ft.)	Lumen Package	Lens	Distribution	2700K 90CRI		3000K 80CRI		3500K 80CRI		4000K 80CRI		5000K 80CRI		Wattage		
				Direct	Indirect											
6	12L	CA	A	5,468	-	6,830	-	7,276	-	7,500	-	7,420	-	60		
				-	5,468	-	6,830	-	7,276	-	7,500	-	7,420			
				5,468	5,468	6,830	6,830	7,276	7,276	7,500	7,500	7,420	7,420		120	
			N	5,514	-	6,889	-	7,338	-	7,564	-	7,483	-	7,483	-	60
				-	5,514	-	6,889	-	7,338	-	7,564	-	7,483	-	7,483	
				5,514	5,514	6,889	6,889	7,338	7,338	7,564	7,564	7,483	7,483	120		
		FA	S	5,373	-	6,712	-	7,150	-	7,370	-	7,291	-	7,291	-	60
				-	5,373	-	6,712	-	7,150	-	7,370	-	7,291	-	7,291	
				5,373	5,373	6,712	6,712	7,150	7,150	7,370	7,370	7,291	7,291	120		
			PA	5,605	-	7,002	-	7,458	-	7,688	-	7,606	-	7,606	-	60
				-	5,605	-	7,002	-	7,458	-	7,688	-	7,606	-	7,606	
				5,605	5,605	7,002	7,002	7,458	7,458	7,688	7,688	7,606	7,606	120		
6	15L	CA	A	6,426	-	8,027	-	8,551	-	8,814	-	8,720	-	77		
				-	6,426	-	8,027	-	8,551	-	8,814	-	8,720		-	8,720
				6,426	6,426	8,027	8,027	8,551	8,551	8,814	8,814	8,720	8,720		154	
			N	6,596	-	8,240	-	8,778	-	9,048	-	8,951	-	8,951	-	77
				-	6,596	-	8,240	-	8,778	-	9,048	-	8,951	-	8,951	
				6,596	6,596	8,240	8,240	8,778	8,778	9,048	9,048	8,951	8,951	154		
		FA	S	6,426	-	8,028	-	8,552	-	8,815	-	8,721	-	8,721	-	77
				-	6,426	-	8,028	-	8,552	-	8,815	-	8,721	-	8,721	
				6,426	6,426	8,028	8,028	8,552	8,552	8,815	8,815	8,721	8,721	154		
			PA	6,653	-	8,311	-	8,853	-	9,126	-	9,028	-	9,028	-	77
				-	6,653	-	8,311	-	8,853	-	9,126	-	9,028	-	9,028	
				6,653	6,653	8,311	8,311	8,853	8,853	9,126	9,126	9,028	9,028	154		
7	07L	CA	A	3,677	-	4,593	-	4,892	-	5,043	-	4,989	-	41		
				-	3,677	-	4,593	-	4,892	-	5,043	-	4,989		-	4,989
				3,677	3,677	4,593	4,593	4,892	4,892	5,043	5,043	4,989	4,989		82	
			N	3,706	-	4,630	-	4,932	-	5,084	-	5,030	-	5,030	-	41
				-	3,706	-	4,630	-	4,932	-	5,084	-	5,030	-	5,030	
				3,706	3,706	4,630	4,630	4,932	4,932	5,084	5,084	5,030	5,030	82		
		FA	S	3,587	-	4,481	-	4,773	-	4,920	-	4,867	-	4,867	-	41
				-	3,587	-	4,481	-	4,773	-	4,920	-	4,867	-	4,867	
				3,587	3,587	4,481	4,481	4,773	4,773	4,920	4,920	4,867	4,867	82		
			PA	3,766	-	4,705	-	5,012	-	5,166	-	5,111	-	5,111	-	41
				-	3,766	-	4,705	-	5,012	-	5,166	-	5,111	-	5,111	
				3,766	3,766	4,705	4,705	5,012	5,012	5,166	5,166	5,111	5,111	82		
7	10L	CA	A	5,201	-	6,497	-	6,921	-	7,134	-	7,058	-	57		
				-	5,201	-	6,497	-	6,921	-	7,134	-	7,058		-	7,058
				5,201	5,201	6,497	6,497	6,921	6,921	7,134	7,134	7,058	7,058		114	
			N	5,116	-	6,392	-	6,808	-	7,018	-	6,943	-	6,943	-	57
				-	5,116	-	6,392	-	6,808	-	7,018	-	6,943	-	6,943	
				5,116	5,116	6,392	6,392	6,808	6,808	7,018	7,018	6,943	6,943	114		
		FA	S	5,116	-	6,392	-	6,808	-	7,018	-	6,943	-	6,943	-	57
				-	5,116	-	6,392	-	6,808	-	7,018	-	6,943	-	6,943	
				5,116	5,116	6,392	6,392	6,808	6,808	7,018	7,018	6,943	6,943	114		
			PA	5,328	-	6,656	-	7,090	-	7,308	-	7,230	-	7,230	-	57
				-	5,328	-	6,656	-	7,090	-	7,308	-	7,230	-	7,230	
				5,328	5,328	6,656	6,656	7,090	7,090	7,308	7,308	7,230	7,230	114		

PERFORMANCE

Delivered Lumens - LAW2																
Length (ft.)	Lumen Package	Lens	Distribution	2700K 90CRI		3000K 80CRI		3500K 80CRI		4000K 80CRI		5000K 80CRI		Wattage		
				Direct	Indirect											
7	12L	CA	A	6,175	-	7,714	-	8,217	-	8,470	-	8,379	-	70		
				-	6,175	-	7,714	-	8,217	-	8,470	-	8,379			
				6,175	6,175	7,714	7,714	8,217	8,217	8,470	8,470	8,379	8,379			
			N	6,226	-	7,778	-	8,285	-	8,540	-	8,448	-	70		
				-	6,226	-	7,778	-	8,285	-	8,540	-	8,448			
				6,226	6,226	7,778	7,778	8,285	8,285	8,540	8,540	8,448	8,448			
		FA	6,073	-	7,586	-	8,081	-	8,330	-	8,241	-	70			
			-	6,073	-	7,586	-	8,081	-	8,330	-	8,241				
			6,073	6,073	7,586	7,586	8,081	8,081	8,330	8,330	8,241	8,241				
		PA	6,379	-	7,969	-	8,489	-	8,750	-	8,656	-	70			
			-	6,379	-	7,969	-	8,489	-	8,750	-	8,656				
			6,379	6,379	7,969	7,969	8,489	8,489	8,750	8,750	8,656	8,656				
		7	15L	CA	A	7,085	-	8,850	-	9,428	-	9,718	-	9,614	-	90
						-	7,085	-	8,850	-	9,428	-	9,718	-	9,614	
7,085	7,085					8,850	8,850	9,428	9,428	9,718	9,718	9,614	9,614			
N	7,273				-	9,085	-	9,678	-	9,976	-	9,869	-	90		
	-				7,273	-	9,085	-	9,678	-	9,976	-	9,869			
	7,273				7,273	9,085	9,085	9,678	9,678	9,976	9,976	9,869	9,869			
FA	7,022			-	8,772	-	9,344	-	9,632	-	9,529	-	90			
	-			7,022	-	8,772	-	9,344	-	9,632	-	9,529				
	7,022			7,022	8,772	8,772	9,344	9,344	9,632	9,632	9,529	9,529				
PA	7,363			-	9,198	-	9,798	-	10,100	-	9,992	-	90			
	-			7,363	-	9,198	-	9,798	-	10,100	-	9,992				
	7,363			7,363	9,198	9,198	9,798	9,798	10,100	10,100	9,992	9,992				
8	07L			CA	A	4,220	-	5,271	-	5,615	-	5,788	-	5,726	-	47
						-	4,220	-	5,271	-	5,615	-	5,788	-	5,726	
		4,220	4,220			5,271	5,271	5,615	5,615	5,788	5,788	5,726	5,726			
		N	4,281		-	5,348	-	5,697	-	5,872	-	5,809	-	47		
			-		4,281	-	5,348	-	5,697	-	5,872	-	5,809			
			4,281		4,281	5,348	5,348	5,697	5,697	5,872	5,872	5,809	5,809			
		FA	4,135	-	5,166	-	5,503	-	5,672	-	5,611	-	47			
			-	4,135	-	5,166	-	5,503	-	5,672	-	5,611				
			4,135	4,135	5,166	5,166	5,503	5,503	5,672	5,672	5,611	5,611				
		PA	4,336	-	5,417	-	5,770	-	5,948	-	5,884	-	47			
			-	4,336	-	5,417	-	5,770	-	5,948	-	5,884				
			4,336	4,336	5,417	5,417	5,770	5,770	5,948	5,948	5,884	5,884				
		8	10L	CA	A	5,866	-	7,328	-	7,806	-	8,046	-	7,960	-	65
						-	5,866	-	7,328	-	7,806	-	8,046	-	7,960	
5,866	5,866					7,328	7,328	7,806	7,806	8,046	8,046	7,960	7,960			
N	5,952				-	7,435	-	7,920	-	8,164	-	8,077	-	65		
	-				5,952	-	7,435	-	7,920	-	8,164	-	8,077			
	5,952				5,952	7,435	7,435	7,920	7,920	8,164	8,164	8,077	8,077			
FA	5,749			-	7,182	-	7,650	-	7,886	-	7,801	-	65			
	-			5,749	-	7,182	-	7,650	-	7,886	-	7,801				
	5,749			5,749	7,182	7,182	7,650	7,650	7,886	7,886	7,801	7,801				
PA	6,028			-	7,530	-	8,021	-	8,268	-	8,179	-	65			
	-			6,028	-	7,530	-	8,021	-	8,268	-	8,179				
	6,028			6,028	7,530	7,530	8,021	8,021	8,268	8,268	8,179	8,179				

PERFORMANCE





Delivered Lumens - LAW2																
Length (ft.)	Lumen Package	Lens	Distribution	2700K 90CRI		3000K 80CRI		3500K 80CRI		4000K 80CRI		5000K 80CRI		Wattage		
				Direct	Indirect											
8	12L	CA	A	7,083	-	8,849	-	9,426	-	9,716	-	9,612	-	80		
				-	7,083	-	8,849	-	9,426	-	9,716	-	9,612			
				7,083	7,083	8,849	8,849	9,426	9,426	9,716	9,716	9,612	9,612		160	
			N	7,185	-	8,976	-	9,561	-	9,856	-	9,750	-	9,750	-	80
				-	7,185	-	8,976	-	9,561	-	9,856	-	9,750	-	9,750	
				7,185	7,185	8,976	8,976	9,561	9,561	9,856	9,856	9,750	9,750	160		
		FA	S	6,926	-	8,652	-	9,216	-	9,500	-	9,398	-	9,398	-	80
				-	6,926	-	8,652	-	9,216	-	9,500	-	9,398	-	9,398	
				6,926	6,926	8,652	8,652	9,216	9,216	9,500	9,500	9,398	9,398	160		
			PA	7,279	-	9,093	-	9,686	-	9,984	-	9,877	-	9,877	-	80
				-	7,279	-	9,093	-	9,686	-	9,984	-	9,877	-	9,877	
				7,279	7,279	9,093	9,093	9,686	9,686	9,984	9,984	9,877	9,877	160		
8	15L	CA	A	8,501	-	10,619	-	11,312	-	11,660	-	11,535	-	103		
				-	8,501	-	10,619	-	11,312	-	11,660	-	11,535			
				8,501	8,501	10,619	10,619	11,312	11,312	11,660	11,660	11,535	11,535		206	
			N	8,627	-	10,778	-	11,480	-	11,834	-	11,707	-	11,707	-	103
				-	8,627	-	10,778	-	11,480	-	11,834	-	11,707	-	11,707	
				8,627	8,627	10,778	10,778	11,480	11,480	11,834	11,834	11,707	11,707	206		
		FA	S	8,384	-	10,473	-	11,156	-	11,500	-	11,377	-	11,377	-	103
				-	8,384	-	10,473	-	11,156	-	11,500	-	11,377	-	11,377	
				8,384	8,384	10,473	10,473	11,156	11,156	11,500	11,500	11,377	11,377	206		
			PA	8,738	-	10,916	-	11,628	-	11,986	-	11,858	-	11,858	-	103
				-	8,738	-	10,916	-	11,628	-	11,986	-	11,858	-	11,858	
				8,738	8,738	10,916	10,916	11,628	11,628	11,986	11,986	11,858	11,858	206		

PERFORMANCE



Direct Only Electrical Data (Amps)*							
Lumen Package (ft.)	Lumen Package	Wattage	120V	208V	240V	277V	347V
1	700	8	0.06	0.04	0.03	0.03	0.02
	1000	10	0.08	0.05	0.04	0.03	0.03
2	700	12	0.10	0.06	0.05	0.04	0.04
	1000	18	0.15	0.08	0.07	0.06	0.05
	1200	21	0.17	0.10	0.09	0.08	0.06
	1500	27	0.22	0.13	0.11	0.10	0.08
3	700	18	0.15	0.09	0.07	0.06	0.05
	1000	26	0.21	0.12	0.11	0.09	0.07
	1200	31	0.26	0.15	0.13	0.11	0.09
	1500	39	0.33	0.19	0.16	0.14	0.11
4	700	24	0.2	0.11	0.10	0.09	0.07
	1000	33	0.27	0.16	0.14	0.12	0.09
	1200	40	0.33	0.19	0.17	0.14	0.12
	1500	52	0.43	0.25	0.22	0.19	0.15
5	700	29	0.24	0.14	0.12	0.10	0.08
	1000	42	0.35	0.20	0.18	0.15	0.12
	1200	52	0.43	0.25	0.22	0.19	0.15
	1500	65	0.54	0.31	0.27	0.23	0.19
6	700	36	0.3	0.17	0.15	0.13	0.10
	1000	51	0.43	0.25	0.21	0.18	0.15
	1200	62	0.52	0.30	0.26	0.22	0.18
	1500	78	0.65	0.38	0.33	0.28	0.22
7	700	41	0.34	0.20	0.17	0.15	0.12
	1000	58	0.48	0.28	0.24	0.21	0.17
	1200	70	0.58	0.34	0.29	0.25	0.20
	1500	91	0.76	0.44	0.38	0.33	0.26
8	700	47	0.39	0.23	0.20	0.17	0.14
	1000	65	0.55	0.31	0.27	0.24	0.19
	1200	80	0.67	0.38	0.33	0.29	0.23
	1500	102	0.85	0.49	0.43	0.37	0.29

Direct/Indirect Electrical Data (Amps)*							
Lumen Package (ft.)	Lumen Package	Wattage	120V	208V	240V	277V	347V
1	700/700	15	0.13	0.07	0.06	0.05	0.04
	1000/1000	25	0.21	0.12	0.1	0.09	0.07
2	700/700	25	0.21	0.12	0.1	0.09	0.07
	1000/1000	35	0.29	0.17	0.15	0.13	0.1
	1200/1200	42	0.35	0.2	0.17	0.15	0.12
3	1500/1500	53	0.44	0.26	0.22	0.19	0.15
	700/700	36	0.3	0.17	0.15	0.13	0.1
	1000/1000	51	0.43	0.25	0.21	0.18	0.15
	1200/1200	62	0.51	0.3	0.26	0.22	0.18
4	1500/1500	78	0.65	0.38	0.33	0.28	0.23
	700/700	47	0.39	0.23	0.2	0.17	0.14
	1000/1000	65	0.55	0.31	0.27	0.24	0.19
	1200/1200	80	0.67	0.38	0.33	0.29	0.23
5	1500/1500	103	0.86	0.5	0.43	0.37	0.3
	700/700	58	0.48	0.28	0.24	0.21	0.17
	1000/1000	84	0.7	0.4	0.35	0.3	0.24
	1200/1200	104	0.87	0.5	0.43	0.38	0.3
6	1500/1500	130	1.08	0.63	0.54	0.47	0.37
	700/700	72	0.6	0.35	0.3	0.26	0.21
	1000/1000	102	0.85	0.49	0.43	0.37	0.29
	1200/1200	124	1.03	0.6	0.52	0.45	0.36
7	1500/1500	156	1.3	0.75	0.65	0.56	0.45
	700/700	82	0.68	0.39	0.34	0.3	0.24
	1000/1000	116	0.97	0.56	0.48	0.42	0.33
	1200/1200	140	1.17	0.67	0.58	0.51	0.4
8	1500/1500	182	1.52	0.88	0.76	0.66	0.52
	700/700	94	0.79	0.45	0.39	0.34	0.27
	1000/1000	131	1.09	0.63	0.55	0.47	0.38
	1200/1200	160	1.33	0.77	0.67	0.58	0.46
8	1500/1500	204	1.7	0.98	0.85	0.74	0.59



PRODUCT DIMENSIONS





LiniArc Wet Location, Rigid Stem, 1ft - 8ft (LAW2 T1-8)

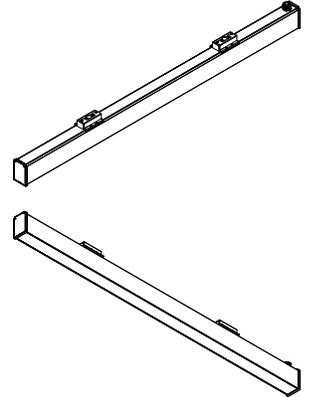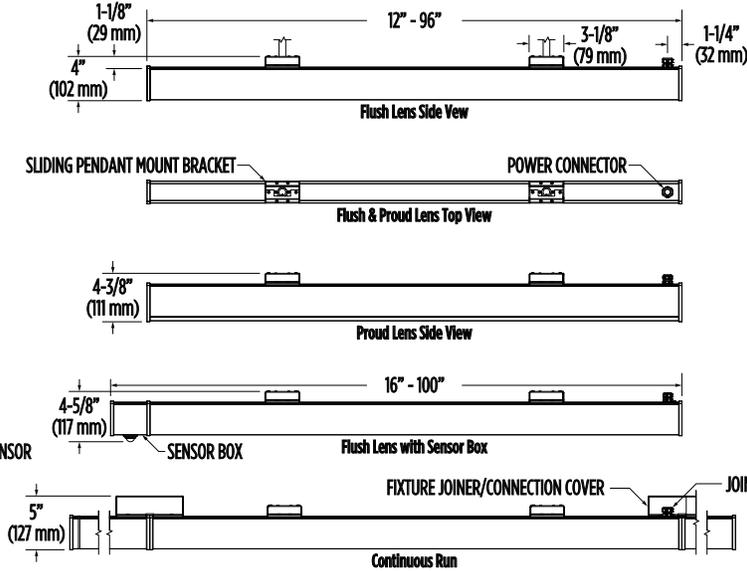

LiniArc Wet Location, Aircraft Cable Pendant (LAW2 P/G 1-8)

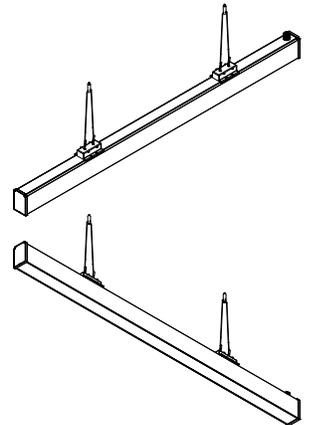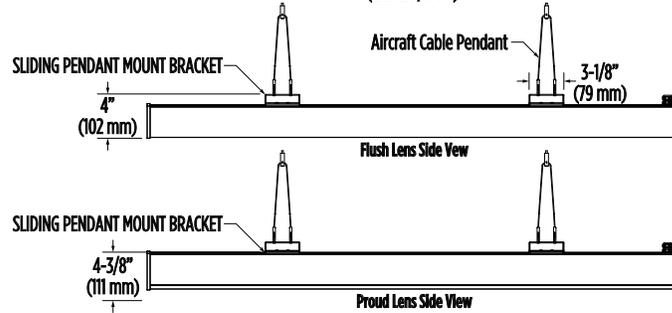




LiniArc Wet Location, Direct to Surface, 1ft - 4ft (LAW2 S1-4)

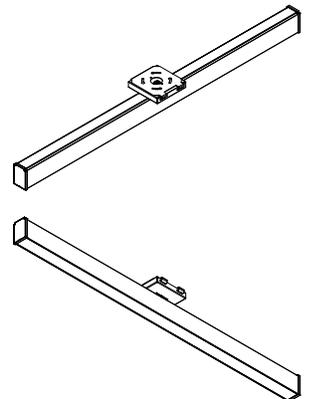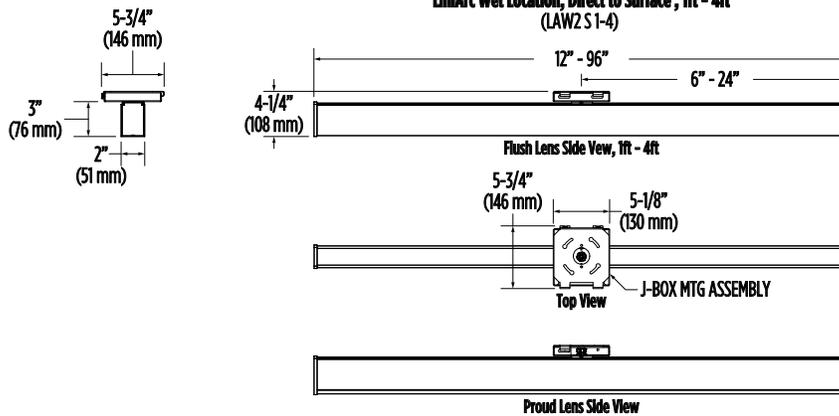


LiniArc Wet Location, Direct to Surface, 5ft - 8ft (LAW2 S5-8)



PRODUCT DIMENSIONS

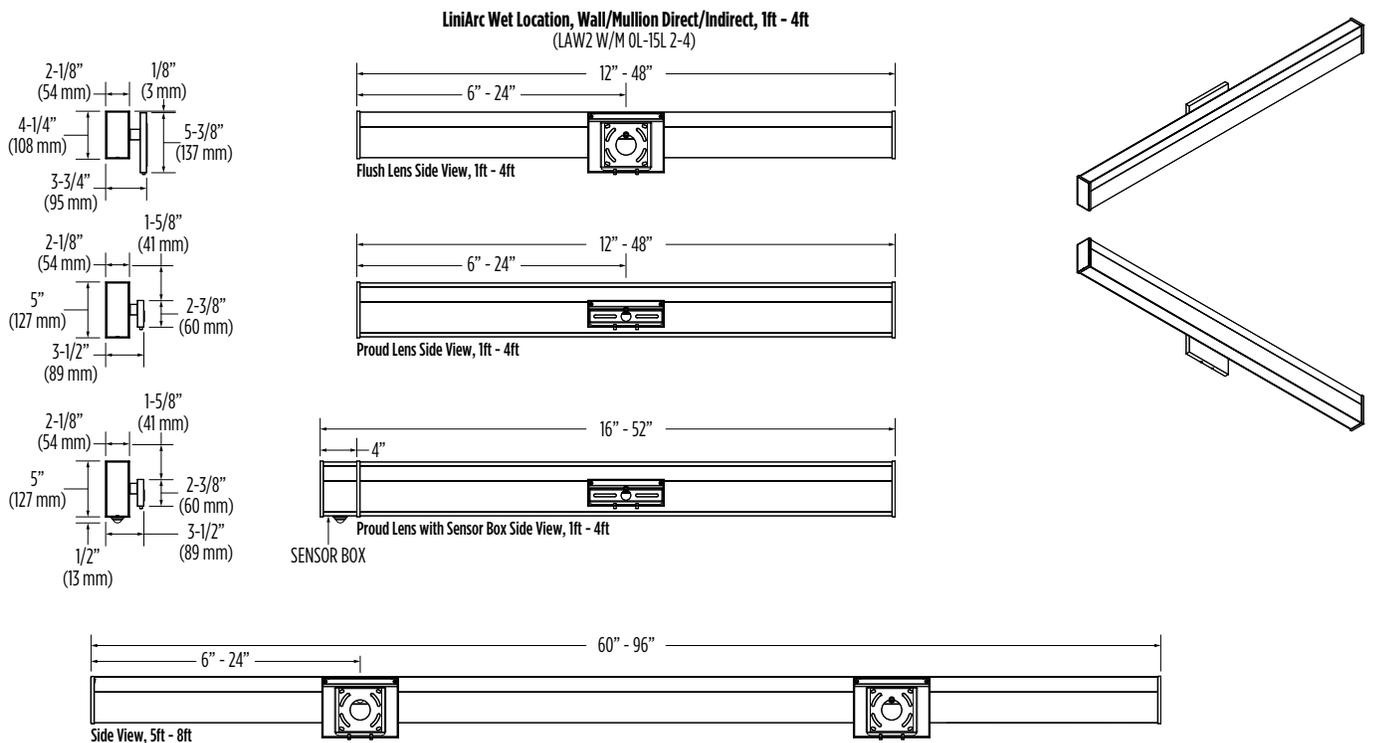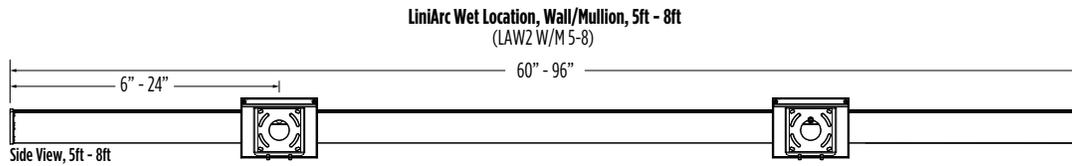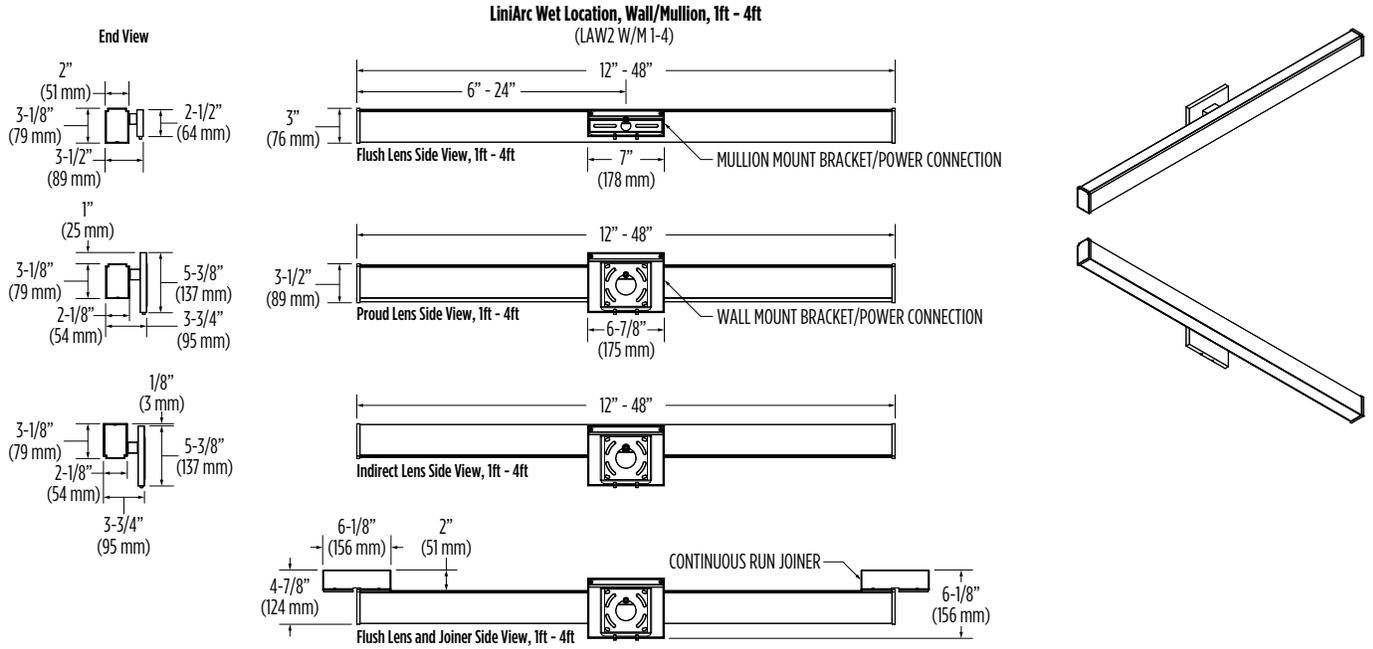

PRODUCT DIMENSIONS

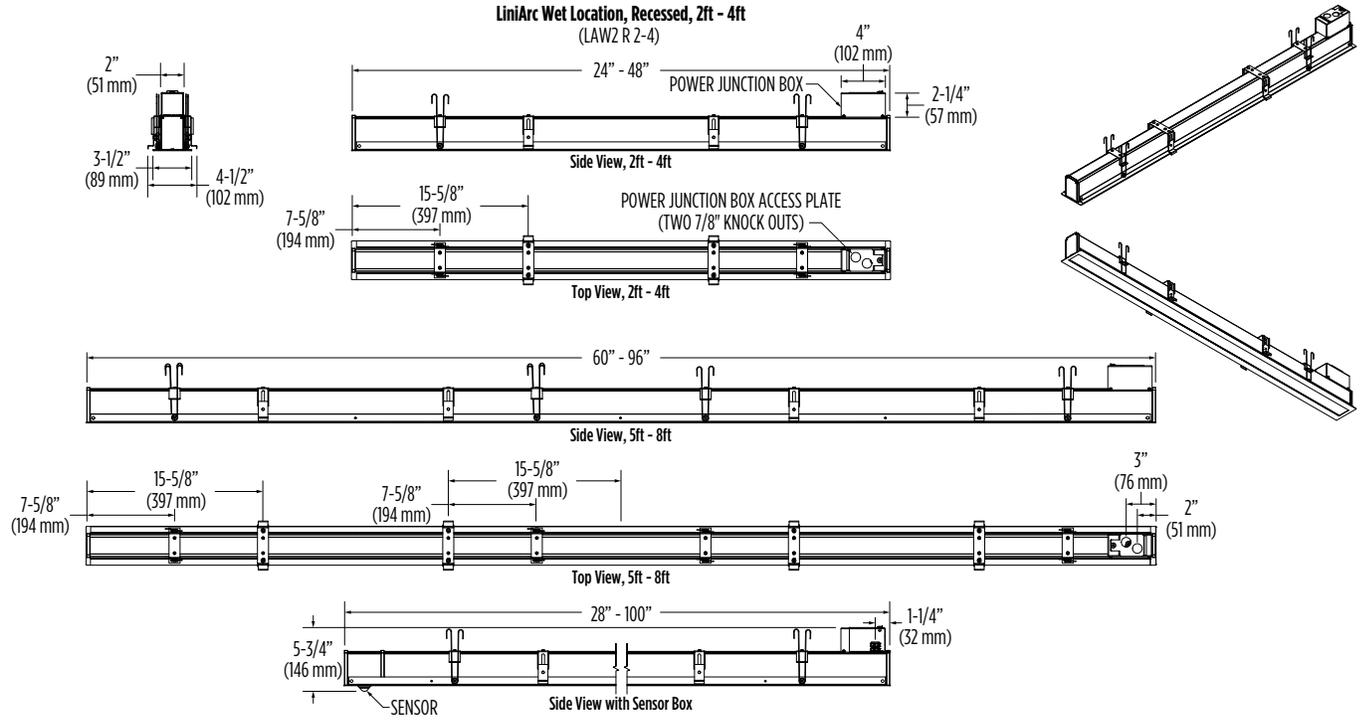

Shipping Weights - lbs (per ft.)		
Configuration	Unboxed	Boxed
Direct Only	3lbs per ft.	5lbs per ft.
Direct/Indirect	4lbs per ft.	6lbs per ft.