




Outdoor Sports Position Guide

Maximize your Game with the LSI name


- High performance lighting to elevate the areas where you play
- American made fixtures deliver premium low glare light
- Industry best optics and shielding options to enhance athlete's experience

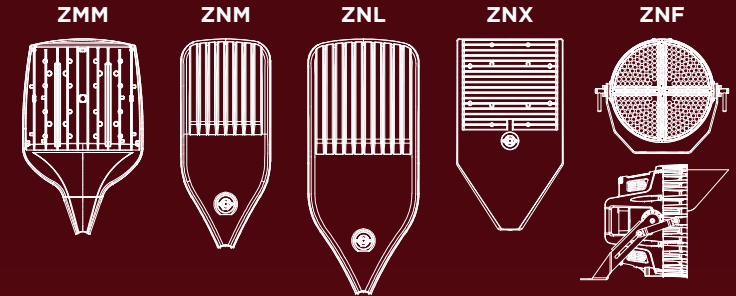

ZMM

MODULAR COURT



24,000 - 55,000 Lumens

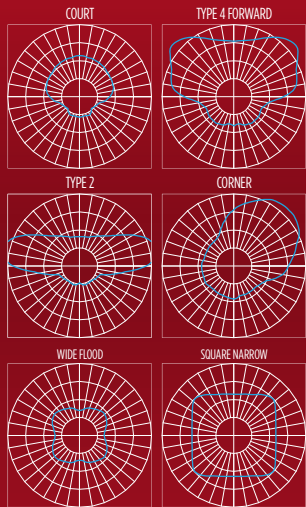

ZNM

MEDIUM COURT



48,000 - 78,000 Lumen



ZNL

LARGE COURT


24,000 - 55,000 Lumens



ZNX

MEDIUM X COURT


24,000 - 54,000 Lumens




ZNF

SPORTS FLOOD

75,000 - 110,000 Lumens

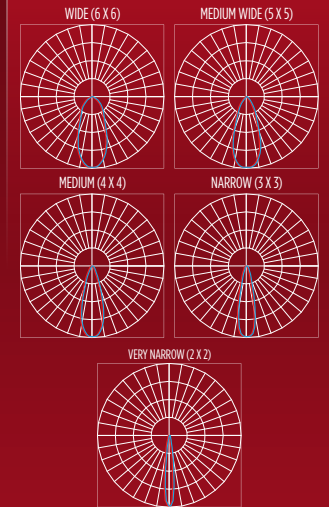


PICKLEBALL



TENNIS




BASKETBALL



VOLLEYBALL



SOCCER



FOOTBALL



TRACK

SPORT COURT

FIELD LIGHTING

Indoor Sports Position Guide

					
	Zone Modular Medium Court Light (ZMM)	Zone Medium Court Light (ZNM)	Zone Large Court Light (ZNL)	Zone Medium Court Light (ZNX)	Zone Sports Flood (ZNF)
	★★★★★	★★★★★	★★★★★	★★★★★	★★★★
Application	Court Sports	Court Sports	Court Sports	Court Sports	Field Lighting
Category of Play	Category I, II, and III	Category II, and III	Category I, II, and III	Category II, and III	Category II, and III
Finish Color	LSI Standard + Custom Colors	LSI Standard + Custom Colors	LSI Standard + Custom Colors	LSI Standard + Custom Colors	Black Finish Only
Dimensions L x W x H (in)	24 x 18 x 3	31 x 14 x 3	38 x 17 x 3.5	29 x 16 x 2	21 x 19 x 18
Weight (lbs)	30	30	60	27	51
Typical Mounting Height (ft)	20 - 30	20 - 30	20 - 30	20 - 30	50 - 80
Adjustable Slipfitter	Standard w/ SF Arm	ASF Accessory	ASF Accessory	ASF Accessory	SF Accessory
Distributions	Type 2, 4F, WF, 5QN, CT, LC/RC	Type 4, FT, CT, LC/RC	Type FT, CT	Type 4, FT, CT, LC/RC	NEAM 2x2, 3x3, 4x4, 5x5, 6x6
Delivered Lumens*	24,000 - 54,000	24,000 - 55,000	40,000 - 78,000	24,000 - 55,000	75,000 - 110,000
CCT	3000K, 4000K, 5000K	3000K, 4000K, 5000K	3000K, 4000K, 5000K	3000K, 4000K, 5000K	4000K, 5000K
LPW	105 - 175	122 - 150	114 - 146	112 - 151	137 - 170
Lens/Optics	Replaceable Acrylic Lens/Module	Silicone	Silicone	Silicone	Polycarbonate
Shielding	Integral Shield	Integral Shield	Integral Shield	Integral Shield	Half Visor
Rotatable Optics	Factory and Field Rotatable	Factory Rotatable Only	Factory Rotatable Only	Factory Rotatable Only	N/A
Listings	IP66	IP66	IP66	IP66	IP66
DLC	Premium	Premium	Premium	Premium	Premium
Voltage Range	120-277V, 347-480V	120-277V, 347-480V	120-277V, 347-480V	120-277V, 347-480V	120-277V, 347-480V
Photocell	Twistlock	Button or Twistlock	Twistlock	Button or Twistlock	Twistlock Only
Sensor & Wireless Controls	IMSBT, AirLink Blue, AirLink Synapse	IMSBT, AirLink Blue, AirLink Synapse	IMSBT, AirLink Blue, AirLink Synapse	IMSBT, AirLink Blue, AirLink Synapse	IMSBT, AirLink Blue, AirLink Synapse
7-Pin Receptacle	Yes	Yes	Yes	Yes	Yes
Surge Device	10kV Standard	10kV Standard	10kV Standard	10kV Standard	20kV Standard
Remote Driver Capability	No	No	No	No	Yes
BAA/BABAA	Yes	Yes	Yes	Yes	BAA Only

*Custom lumen and wattage packages available, consult factory
**Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org/OPL to confirm which versions are qualified.