




Value-Series Exit Sign (VE)

Universal Swivel, Field Selectable
Red/Green Edge-Lit LED

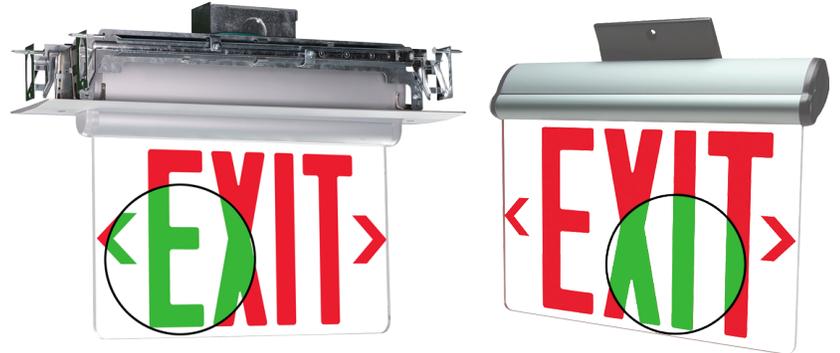

OVERVIEW	
Mounting Configurations	Surface, Wall, Recessed, & Pendant
Panel Illumination	Field-Selectable Red/ Green LEDs
Input VAC (Hz)	120/277 (60)
Battery (min)	NiCad (90)
Weight lbs (kg)	12.0 (5.4)

QUICK LINKS

FEATURES & SPECIFICATIONS

Construction

- Extruded aluminum housing with high-grade, acrylic panel.
- Pivoting design for simple installation in any application, including surface and recessed wall, ceiling and sloped ceilings.
- Compact low-profile design for ease of maintenance.
- Mirror panel standard on double-face signs.
- Standard finish options: White, Black, and Satin Aluminum.

Optical System

- Illuminated by long-life, high intensity, field selectable red or green LEDs.
- Fully-illuminated 6" characters with 3/4" stroke.
- Comes with a single edge-lit acrylic panel with selectable red or green EXIT legends, allowing on-site customization to meet local code or aesthetic requirements.
- All configurations include field-selectable directional chevrons.

Electrical

- Standard Universal Voltage - 120/277VAC dual primary at 60Hz.
- Low voltage disconnect eliminates deep discharge.
- Test button to provide manual verification of the transfer circuit and emergency lamps.

Battery

- Maintenance free NiCad Battery (WB only).
- Operating Temperatures 10°C to 40°C (50°F to 104°F).

Installation

- All configurations include universal surface and recessed mounting kits.
- Surface ceiling, end, wall, and recessed mounting available with universal mount.
- Recessed ceiling mount accessible above the plenum with electronics and battery contained in housing.
- Optional pendant mounting available with mounting accessories.

Warranty

- 5 year warranty on all electronics and housing.
- Separate 5 year pro-rated warranty on the battery.

Listings

- UL 924
- NFPA 101
- NEC
- CEC
- Damp Location Rated
- UL Listed 90 minute emergency run time, 24 hour recharge time.

Value-Series Exit Sign (VE)

Type : _____

 **Have questions?** Call us at (800) 436-7800

ORDERING GUIDE

TYPICAL ORDER EXAMPLE: VE U 6 RG U WB BL SD2							
Prefix	Mounting	Character Size	Letter Color	Panel	Battery	Housing Color	Options
VE - Value Edge-Lit Exit Sign	U - Universal Surface Ceiling, End, Wall, or Recessed Mount ¹	6 - 6" Tall Letters 3/4" Stroke	RG - Red/Green Selectable	U - Universal (1 Single-Sided Clear Panel, 1 Double-Sided Mirror Panel) M - Mirror (1 Single-Sided Mirror Panel, 1 Double-Sided Mirror Panel)	LB - Less Battery (AC Only) WB - NiCad Battery 2CI - 2 Circuit Input	BL - Black SA - Satin Aluminum WH - White	SD2 - Self Test / Self Diagnostic ²



Need more information?
[Click here for our glossary.](#)

Have additional questions?
Call us at (800) 436-7800 

- ¹ Universal Mounting Options includes kits for surface & recessed mounting.
² Not available on LB or 2CI configurations.

ACCESSORY ORDERING INFORMATION

Category	Description	Part Number
Mounting Accessories	1' Pendant Mount Kit - White	413080
	1' Pendant Mount Kit - Black	908732
	1' Pendant Mount Kit - Satin Aluminum	908733
	2' Pendant Mount Kit - White	405732
	2' Pendant Mount Kit - Black	908734
	2' Pendant Mount Kit - Satin Aluminum	908735
	Pendant Adapter	675447
Additional Sign Face Panels	Single Clear Panel	908761
	Single Mirror Panel	908763
	Double Face Mirror Panel	908765

PERFORMANCE

Model	NiCAD Battery	Brownout	Low Voltage Disconnect	Overload Disconnect	Short Circuit Disconnect	Solid State Transfer	Input			
							VAC	Hz	mA	W
LB - Less Battery (AC Only)	N/A	Yes	N/A	N/A	N/A	N/A	120/277	60	40/20	3.5
WB/SD2 - NiCAD Battery with Self Test/Self Diagnostic	AAA, 3.6V, 300mA	Yes	Yes	N/A	N/A	Yes	120/277	60	40/20	4
2 CI - 2 Circuit Input	N/A	Yes	N/A	N/A	N/A	N/A	120/277	60	35/15	3.5


Value-Series Exit Sign (VE)

Type : _____


 Have questions? Call us at (800) 436-7800

PRODUCT DIMENSIONS


Recessed Mount

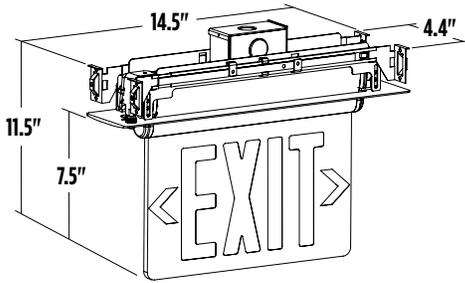

Ceiling Mount

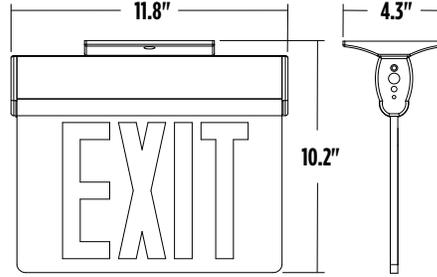


Pendant Adapter*

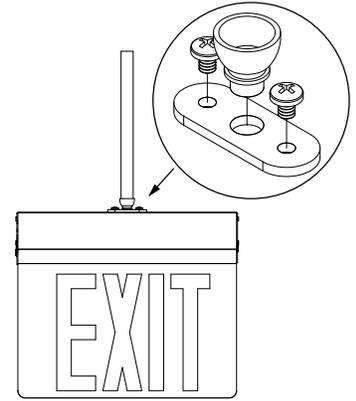


*Pendant Adapter accepts 5/8 OD, 3/8 IP extension rods, provided by others

Wall Mount

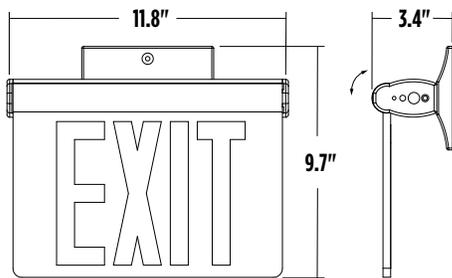

Flag/End Mount

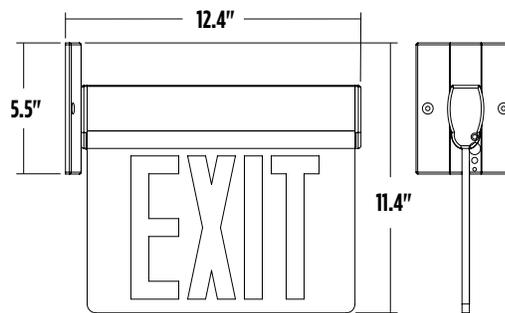

SELF-TEST/SELF DIAGNOSTIC (WB UNITS ONLY)

The SD2 bi-color circuit is factory preset; without any field adjustments needed. It continuously monitors the performance condition of the AC power, battery supply, and charging circuitry.

The intent of this option is to provide visual signaling to identify fault at the Exit. Fault indicators are as follows:

1. Green: On/Ready
Blinking: Testing
2. Red: Service Alert
3. Service Alert LED Code (Red LED Lamp Indicator)

•	One blink, 4 sec pause	Battery is not connected
••	Two blinks, 4 sec pause	Battery voltage too low
•••	Three blinks, 4 sec pause	Charger board circuit failure
••••	Four blinks, 4 sec pause	Transfer function failure
•••••••	Seven blinks, 4 sec pause	LED strip failure

Self-testing/Self-diagnostics also has a manual test function, press test button as follows:

Press test button once	30 Second discharge test
Press test button twice within two seconds	3 Minute discharge test
Press test button three times within two seconds	30 Minute discharge test
Press test button four times within two seconds	90 Minute discharge test

NOTE: After solving the fault of the emergency equipment, press the test button for two seconds without releasing to reset. LED indicator will show green.