Catalog # : _____ Project : _____ Type : _____

Prepared By : _____ Date : _____

Low Profile Wrap (WNA)

LED Fixture



OVERVIEW	
Lumen Package (lm)	4,000 - 13,000
Wattage Range (W)	33 - 89
Color Temparatures (K)	3500 - 5000

QUICK LINKS

Ordering Guide | Performance | Dimensions

FEATURES & SPECIFICATIONS

Construction

- Housing constructed of code gauge die formed cold rolled steel. Wire way cover snaps in for easy removal. End plates riveted to housing. Equipped with knockout for nipple insertion.
- Available in nominal 10” and 14” widths
- Economical low profile design
- Wide, even light distribution
- Projected life of at least 60,000 hours. Contact factory for TM-21 detail
- All reflective surfaces are finished with a high reflectance, lighting fixture white polyester powder.

Optical System

- Use of closely-spaced medium-power, high-brightness chips minimizes pixelation and provides uniform lens luminance. Available in Cool White (5000K), Neutral White (4000K) and Warm White (3500K) color temperatures. CRI >= 80 (CW > 70). LM-80 reports available.
- Frosted, impact-resistant acrylic, hingeable from either side. Exterior surface of lens bottom embossed with prisms, sides embossed with internal prisms for low-brightness illumination.

Electrical

- Universal voltage (120-277 Vac) input, 50/60 Hz.
- Power factor (PF): > 0.9
- Total harmonic distortion (THD): < 20%
- In-rush current: < 15 Amps.
- High-performance isolated driver features over-voltage, over-current and shortcircuit (with auto-recovery) protection. Driver module is sealed to IP66 protection levels, with a Class A sound rating. 0-10V dimming standard.

Warranty

- LSI luminaires carry a 5-year limited warranty. Refer to https://www.lsicorp.com/resources/terms-conditions-warranty/ for more information.

Listings

- UL Listed to U.S. and Canadian safety standards.
- Suitable for damp locations.
- IBEW Union made in the U.S.A.
- Buy American Act (BAA) and Build America, Buy America (BABAA) Compliant Fixture.
  - Compliance dependent on SKU and configuration. Confirm with factory.

©LSI Industries Inc. All Rights Reserved. Specifications and dimensions subject to industry standard tolerances. Specifications subject to change without notice.

Low Profile Wrap (WNA) LED Fixture

Type : _____

Have questions? Call us at (800) 436-7800

ORDERING GUIDE

Back to Quick Links

TYPICAL ORDER EXAMPLE: WNA10 LED SS CW UE EM

Prefix	Light Source	Driver	Color Temperature	Voltage	Options
WNA10 - Narrow Body **WNA14** - Wide Body	**LED**	**SS** - Super Saver **HO** - High Output **VHO** - Very High Output	**WW** - Warm White (3500K) **NW** - Neutral White (4000K) **CW** - Cool White (5000K)	**UE** - Universal Voltage (120-277VAC) **347** - High Voltage (347-480V)	**EM** - Emergency Pack **OCS** - Integral Occupancy Sensor **SD50** - Step Dimming to 50%

Need more information?
Click here for our glossary

Have additional questions?
Call us at (800) 436-7800

ACCESSORY ORDERING INFORMATION (Accessories are field installed)

Part Number	Description
PMK	Pendant Mount Kit (3/8" IP Stems)

CONTROLS

Part Number	Order Number	Description
755249	**ALBC 5A**	5A Circuit Controller
755248	**ALBC 5A OS1**	5A Circuit Controller w/ Ceiling-mount Motion & Daylight Harvesting Sensor 9ft. Mounting Height
755245	**ALBC 5A OS2**	5A Circuit Controller w/ Ceiling-mount Motion & Daylight Harvesting Sensor 40ft. Mounting Height
760580	**ALBCM DHS**	AirLink Blue Daylight Harvesting Sensor
760380	**ALBCM**	AirLink Blue Ceiling Mount Motion Sensor
754823	**ALBWS E02B WH**	AirLink Blue Two Button Kinetic Switch
754824	**ALBWS E04B WH**	AirLink Blue Four Button Kinetic Switch
741967	**ALBTK**	AirLink Blue Time Keeper

PERFORMANCE


Back to Quick Links

Delivered Lumens[1]

Fixture Package	SS - Super Saver			HO - High Output			VHO - Very High Output			Wattage		
	WW	NW	CW	WW	NW	CW	WW	NW	CW	SS	HO	VHO
WNA10	4,475	4,080	-	6,745	6,340	-	-	-	-	33	55	-
WNA14	-	-	-	6,785	6,680	7,560	10,575	10,020	12,590	-	56	89

PRODUCT DIMENSIONS

Back to Quick Links

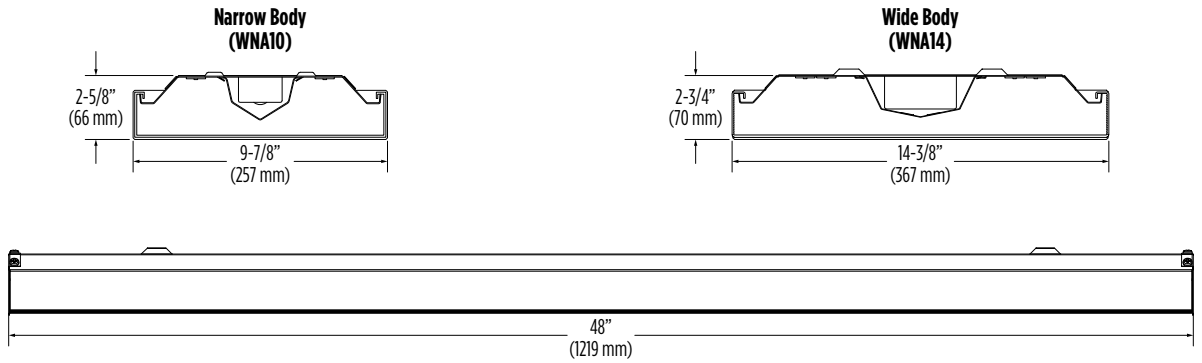

1 LED Chips are frequently updated therefore values may increase.

©LSI Industries Inc. All Rights Reserved. Specifications and dimensions subject to industry standard tolerances. Specifications subject to change without notice.