




XLPG Linear LED Parking Garage Lighting

Switch to LED Technology – Start Saving Energy TODAY!

The XLPG delivers high performance, precision optics at an affordable value; making it the LED solution of choice for new construction and retrofit parking garages.



- Industry-Leading Performance – unique optic design delivers outstanding, uniform lighting – up to 9874 lumens, at 125 lumens per watt. Approximately 14% uplight which eliminates the ‘cave effect’. Diffused or optional clear lens.
- Life Expectancy – up to 100,000 hours or approximately 9 years, burning 24/7. That almost 5 times the life expectancy of traditional HID.
- Durable Construction – purpose built for the parking garage applications. High impact, industrial strength housing and lens withstand weather elements and vandalism.
- Energy Savings – uses up to 50% less energy than traditional lamp sources. Optional sensing and dimming available for extra energy savings
- Wireless controls to maximize energy savings
- Installation Labor Savings – super easy and quick to install in standard surface mounting, without opening fixture. Optional heavy-duty mounting bracket available for extra stability.



Seeing is Believing




Purpose Built – Built to Last



- IP67 vaportight design
- High impact, reinforced polyester fiberglass housing and impact resistant acrylic lens
- Fire-retardant non-toxic gasket provided continuous seal between lens and housing
- Flexible mounting – featuring optional heavy duty mounting bracket and optional stainless steel latches
- Features special breather design in the housing to prevent internal pressures and vacuums to ensure long-life seal and component integrity.

Packed with Performance

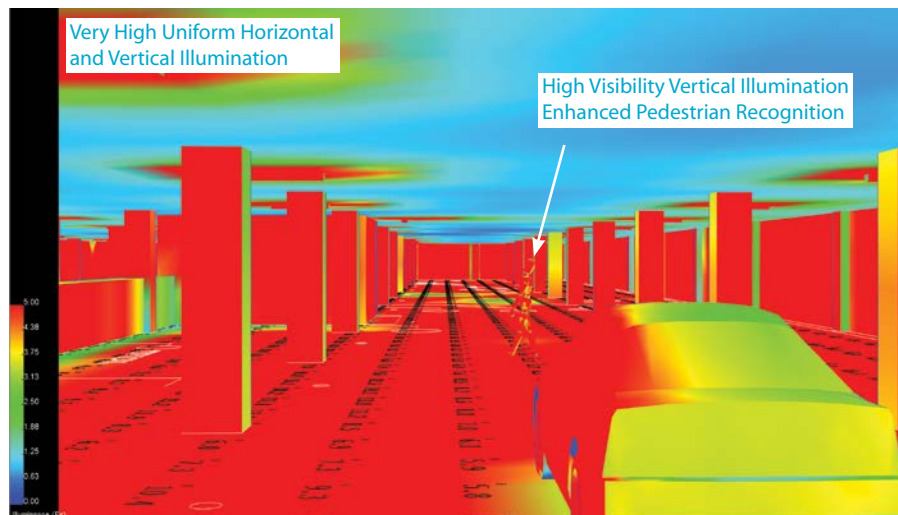

- **Designed to meet IES RP-20** (Lighting for Parking Spaces), IES G-1 (Security Lighting for People, Property & Public Spaces), Design Lights Consortium and Lighting Facts, depending on mounting height and spacing
- **Unique optics design** – virtually eliminates glare and visibility of individual diodes
- **Even distribution** – maximum control, performance and fixture spacing for industry standard garage designs
- **Offered with 3 color temperatures** – cool white (5000K; 70 CRI nominal), neutral white (4000K; 80 CRI minimal), warm white (3500K; 80 CRI nominal)

LSI > Experience the Difference



LSI LIGHTING SOLUTIONS
10000 Alliance Road Cincinnati, Ohio 45242
(513)793-3200 FAX (513)793-0147 www.lsi-industries.com

©2014 LSI INDUSTRIES INC.
09/14 3921