



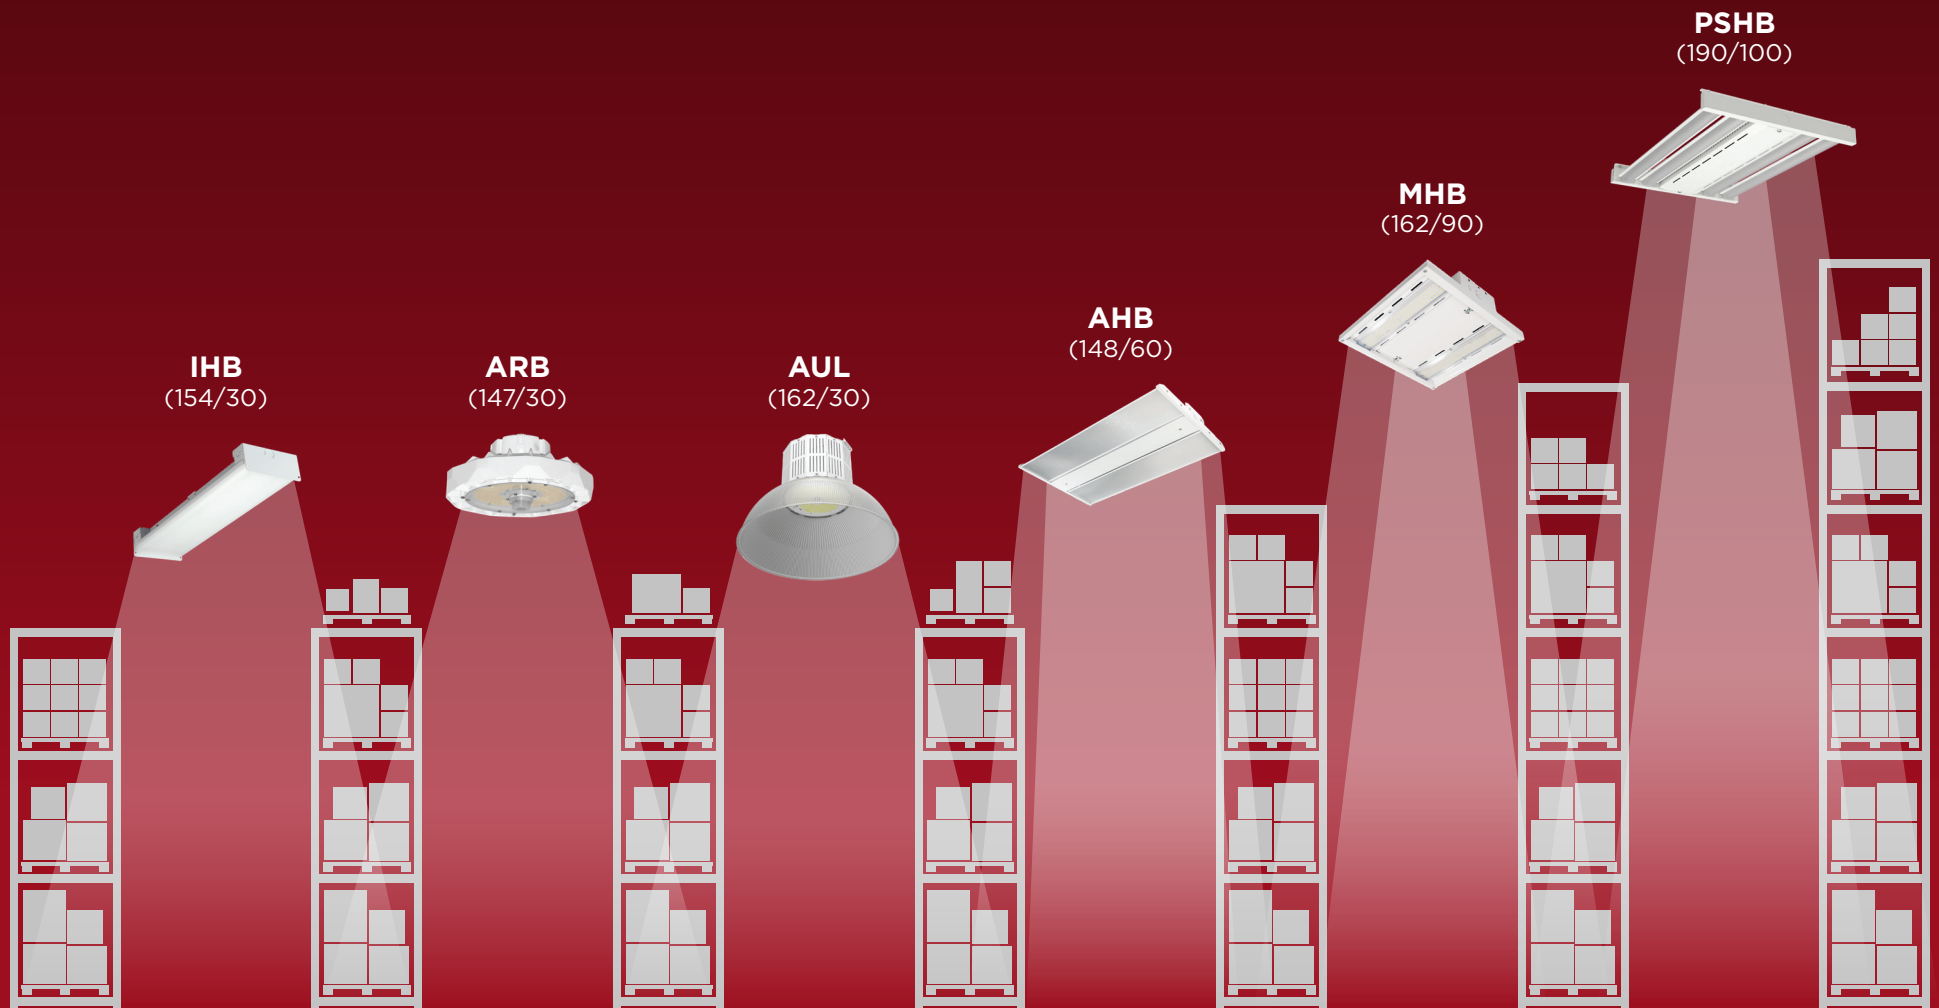

High Bay Position Guide

*Linear & Round High Bay
Fixtures for EVERY Application*

- Energy efficient, easy contractor-friendly lighting solutions
- Lightweight designs allow for minimal installation effort
- Form factor and lumen packages for every opportunity

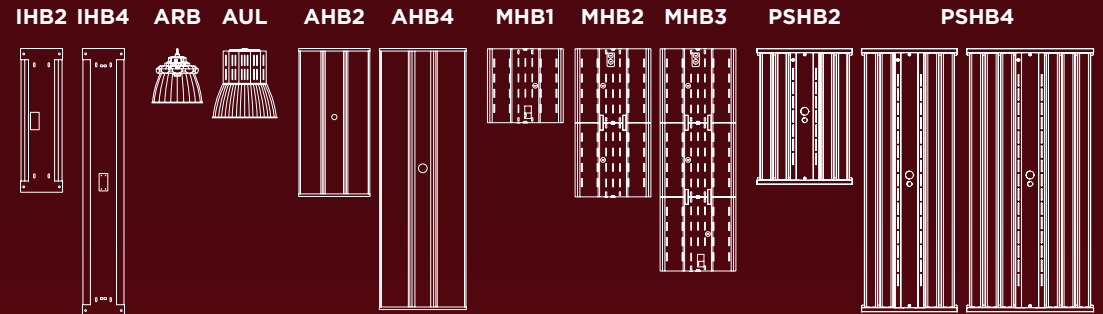

High Bay Position Guide



	Industrial Linear High Bay (IHB)	Advantage High Bay LED (AHB)	Modular High Bay Light (MHB)	Peak Series High Bay Low Glare (PSHB LG)	Peak Series High Bay (PSHB)	Advantage Round High Bay (ARB)	Aureus LED Round High Bay (AUL)
	★★★	★★★	★★★★	★★★★★	★★★★★	★★★	★★★★★
Applications	Warehouse, Manufacturing, Service Bays, Retail	Warehouse, Manufacturing, Service Bays, Retail, Gymnasium	Warehouse, Manufacturing, Service Bays, Retail, Gymnasium	Warehouse, Manufacturing, Service Bays, Retail, Sports	Warehouse, Manufacturing, Service Bays, Retail, Sports	Light Duty, Warehouse, Manufacturing, Retail, Gymnasiums	Light Duty, Warehouse, Manufacturing, Retail, Gymnasiums,
Finish	White	White	White	White, Black, Metallic Silver, Custom	White, Black, Metallic Silver, Custom	White, Black	White, Black, Silver, Custom
Size in Length (ft)/Dia (in)	2, 4	2, 4	1, 2, 3	2, 4	2, 4	9, 12 (Diameter)	15 (Diameter)
Max Mounting Height (ft)	40	60	60	50	70	40	40
Lumen Package (lm)	9,000 - 30,000	18,000 - 60,000	12,000L - 90,000L	12,000 - 54,000	12,000 - 100,000	9" - 6,000 - 12,000 (Selectable) 12" - 18,000 - 30,000 (Selectable)	6,000 - 30,000
CCT (K)	4000, 5000	4000, 5000	4000, 5000	3000, 3500, 4000, 5000	3000, 3500, 4000, 5000	3000, 4000, 5000 (Selectable)	3000, 3500, 4000, 5000
Max Lumens Per Watt (LPW)	154	138	162	146	190	147	162
Max Temperature Rating (C)	55	50	50	60	60	50	50
Listings	Damp Location	Damp Location	Damp Location	Damp Location, IK06, IK10 with Retention Clips	Damp Location, IK06, IK10 with PC Lens	Wet Location, IP65, IK08	Damp Location
DLC ¹	Premium	Premium	Standard	Standard	Standard	Premium	Premium
Lens/Optics	No Lens, Acrylic (Diffuse)	Acrylic (Frosted)	Polycarbonate (Clear, Diffuse)	6 Baffles - White, Black and Silver in Matte or Gloss	No Lens, Flat Acrylic, Curved Acrylic, Flat Polycarbonate (Clear and Diffuse for all)	Open w/Refractor (16")	Open w/Refractor (16" or 22")
Distributions	Wide (120)	Wide (120), Narrow (60)	Wide (120), Narrow (30)	General Focused (75)	Field Rotatable LEDs (0-180 Degree Rotation), Aisle Optic (30)	Wide (120)	General
Voltage (V)	120 - 277, 347 - 480	120 - 347	120 - 277, 347 - 480	120 - 277, 347 - 480	120 - 277, 347 - 480	120 - 347	120 - 277, 347 - 480
Battery Backup	Yes	Yes	Yes	Yes	120V-277V (up to 30W), 347V-480V (30W only)	Yes	Yes
Controls/Sensors	Simple Sensor (OMS only), Basic Bluetooth	Simple Sensor, Basic Bluetooth	Simple Sensor (OMS Only), Basic Bluetooth, AirLink Blue	Simple Sensor (OMS only), Basic Bluetooth, AirLink Blue, AirLink Synapse	Simple Sensor (OMS Only), Basic Bluetooth, AirLink Blue, AirLink Synapse	Simple Sensor (QCMS only)	Basic Bluetooth, AirLink Blue, AirLink Synapse
Pricing	\$\$	\$	\$\$	\$\$\$	\$\$\$	\$\$	\$\$\$

¹ Not all versions of this product may be qualified. Please check the DLC Qualified Products List at www.designlights.org/DPL to confirm which versions are qualified.