


INSTALLATION INSTRUCTIONS - HOUSE SIDE SHIELD

GBS SERIES

WARNING: Disconnect power from luminaires before installing shields!

1. Disconnect power from luminaire.
2. Loosen door closure screws (do not remove). Allow door to hang open.
3. Remove both hinge screws securing door hinges to housing. Leave hinges secured to door frame.
4. Lie door assembly on working surface lens up, protecting the finish with cloth.
5. Loosen the two small screws next to the hinges (**but do not remove these screws**).
6. Hook the (3) clips between the two door panels.
7. Hold the house side shield against the door and secure with screws (supplied).
8. Retighten the two door screws that were loosened in step 2.
9. Re-attach door assembly to housing using old hinge screws.
10. Close door to luminaire. Secure by tightening both door closure screws.

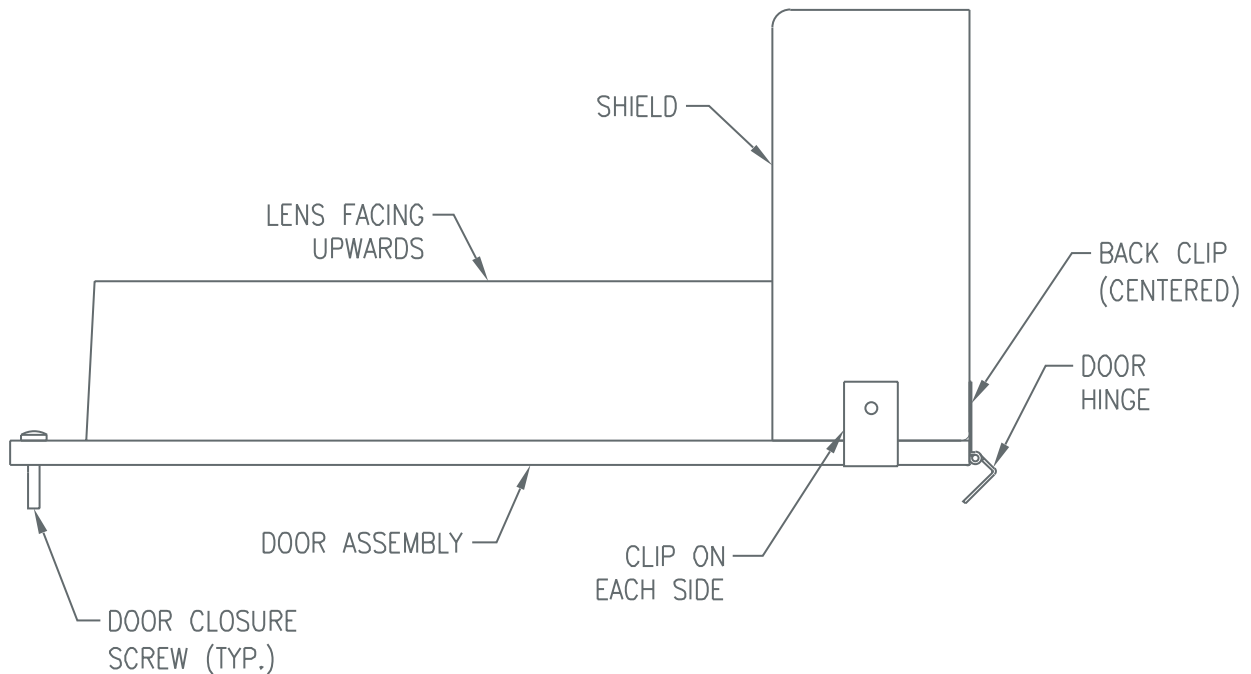

Installation Questions?

Call LSI Field Service Department at:
1-800-436-7800 Ext. 3300 Fax: (877) 861-1368

