

# Installation and Assembly Instructions Standard Canopy Series (SCS) Series



## ⚠ WARNING

### Risk of fire, electric shock, injury or property damage

Risk of electric shock--Disconnect power to equipment before installing or servicing.  
This equipment must be installed according to all applicable codes & ordinances.  
Installation and service of this equipment must be performed by qualified service personnel.  
Do not install damaged equipment.  
Read these instructions before installing, servicing or maintaining this equipment.  
Save these instructions for maintaining and servicing.



## ⚠ CAUTION

Failure to follow instructions or altering equipment could result in damage and void warranty.  
Edges may cut--wear gloves while handling or servicing this equipment.  
Inspect equipment for damage from shipping and handling.

### LUMINAIRE PREPARATION

1. Remove the luminaire from the carton and inspect luminaire for damage. Do not install a damaged luminaire.

### WIRING INFORMATION

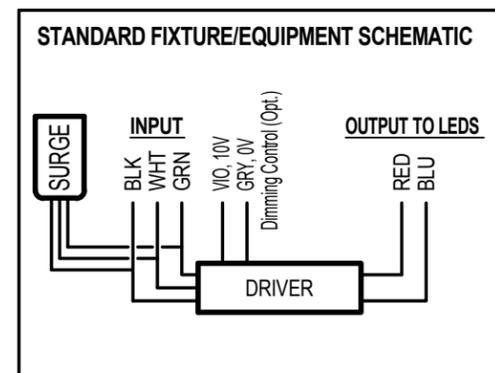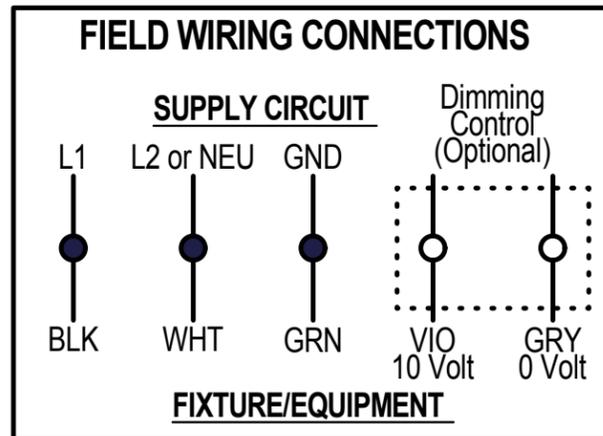

Installation Questions  
Call LSI Field Service Dept.  
800-436-7800 ext. 3300


# Installation and Assembly Instructions Standard Canopy Series (SCS) Series

## Step 2: Above Canopy

1. Install locking collar with gasket using provided washers and bolts.
2. Assemble conduit and wiring box to luminaire (provided by others).
3. Seal 3/4" conduit threads preventing water entry into wireway (sealant by others).
4. Seal fastener penetrations on top side of canopy deck preventing water from leaking to bottom side.
5. Make wiring connections in wiring box.

## Step 1: Below Canopy

1. Drill 4" hole in canopy deck to receive luminaire hub (position of hole is center of luminaire).
2. Align fixture to 4" hole in canopy.
3. Attach luminaire to canopy deck with 4 suitable fasteners\*.

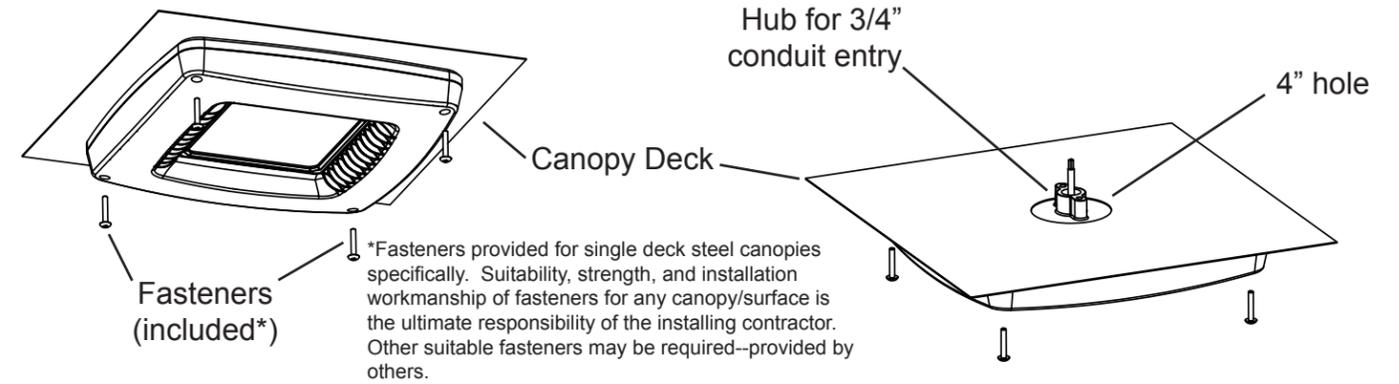

### ACCESSORY (order seperately)


#### Junction Box Kit includes:

Part# 673429

- Junction Box
- 3/4" x 4-1/2" Threaded Conduit
- (2) Conduit Nuts

#### Locking Collar Parts included:

- Locking Collar
- Gasket
- Fasteners (2 Bolts & 2 Washers)

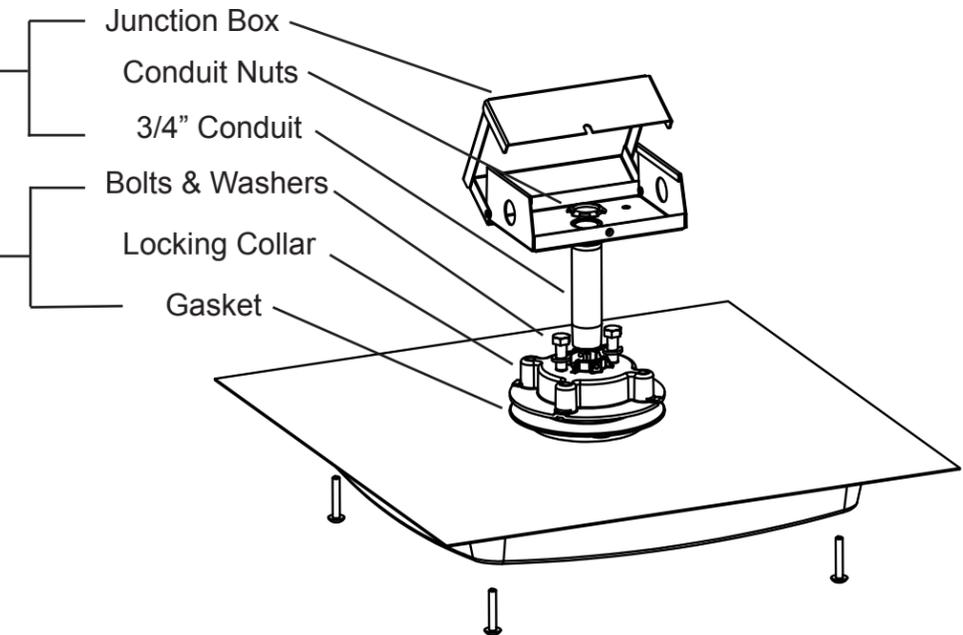

Installation Questions  
Call LSI Field Service Dept.  
800-436-7800 ext. 3300