



# POLES

# Dual Deal

10-Day Quick Shipment Program

# Slice


## Luminaire / Pole Combination

10-Day Quick Shipment Program



LSI offers our most competitive area light paired with our highest quality poles in a deal that offers...

# Speed & Savings

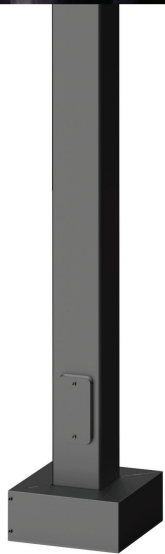

### SLICE (SLM) Luminaire

- » 3 Lumen Packages Up to 30,000 Lumens
- » Single & Double 180 deg. Configurations
- » 4000K & 5000K CCT (70 CRI)
- » Type 3, 5W, & FT Distributions
- » Universal Voltage (120-277V) and Optional High Voltage (347-480V)
- » LSI Bronze Dura-Grip Finish

### 10-Day Quick Ship

- » All Products Manufactured and Shipped from Cincinnati, OH within 10 Days
- » Consolidated Shipment - Everything Arrives on One Truck!
- » All Configurations Available Less Anchor Bolts (Anchor Bolts Available to Ship Before Product)

### 4SQ Series Poles

- » Square Straight Steel Construction w/Base Cover Included
- » 4" Square 11 Gauge Wall Thickness
- » 20' & 24' Lengths
- » Included Pole Base Accommodates 8"-11" bolt circles using four 3/4" diameter anchor bolts
- » LSI Bronze Dura-Grip Finish (Guaranteed to Match Fixture Color)



### Ordering Guide\*

Product Series	Distribution	Lumens-Quantity	Voltage	CCT	Square Straight Pole	Color	Anchor Bolts
PXSLM	3 - Type 3 5W - Type 5 Wide FT - Forward Throw	18L - 18,000 1 - Single Head 24L - 24,000 2 - Double Head 30L - 30,000 @180 Deg.	(Blank) - Universal Voltage (120-277V) HV - High Voltage(347-480V)	40 - 4000K 50 - 5000K	4SQ20 - 4", 20 feet 11-gauge 4SQ24 - 4", 24 feet 11-gauge	(Blank) - Bronze Finish	AB - with anchor bolts/ template LAB - Less anchor bolts/ template

Example: **PXSLM 3 18L-1 40 4SQ20 AB**

**Note:** To pre-ship anchor bolts, order combo less anchor bolts (LAB) and order anchor bolts separately as an additional line item."

\*25 Piece order limit for quickship qualification


18,000 Lumen Package		HID Replacement: 250-400w						
Distribution	CRI	4000K CCT			5000K CCT			Wattage
		Delivered Lumens	Efficacy	BUG Rating	Delivered Lumens	Efficacy	BUG Rating	
3	70	19310	129	B3-U0-G3	20107	134	B3-U0-G3	150
5W	70	18379	123	B4-U0-G2	19138	128	B5-U0-G3	150
FT	70	18781	126	B3-U0-G4	19557	131	B3-U0-G4	150

24,000 Lumen Package		HID Replacement: 400w						
Distribution	CRI	4000K CCT			5000K CCT			Wattage
		Delivered Lumens	Efficacy	BUG Rating	Delivered Lumens	Efficacy	BUG Rating	
3	70	25275	135	B3-U0-G4	25804	138	B3-U0-G4	187
5W	70	23988	128	B5-U0-G3	24490	131	B5-U0-G3	187
FT	70	25126	134	B3-U0-G4	25652	137	B3-U0-G4	187

30,000 Lumen Package		HID Replacement: 400-1000w						
Distribution	CRI	4000K CCT			5000K CCT			Wattage
		Delivered Lumens	Efficacy	BUG Rating	Delivered Lumens	Efficacy	BUG Rating	
3	70	32176	130	B3-U0-G4	32850	133	B3-U0-G4	247
5W	70	30538	124	B5-U0-G4	31177	126	B5-U0-G4	247
FT	70	31987	130	B3-U0-G4	32656	132	B3-U0-G5	247



Single Fixture Performance Pattern

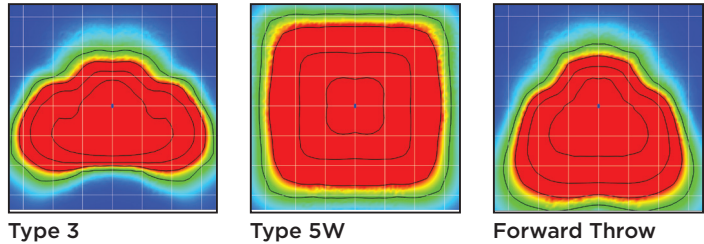

Dimensions

