


LSI GREENLEE BAL/BAM BULLET SERIES

OPEN UPLIGHTS

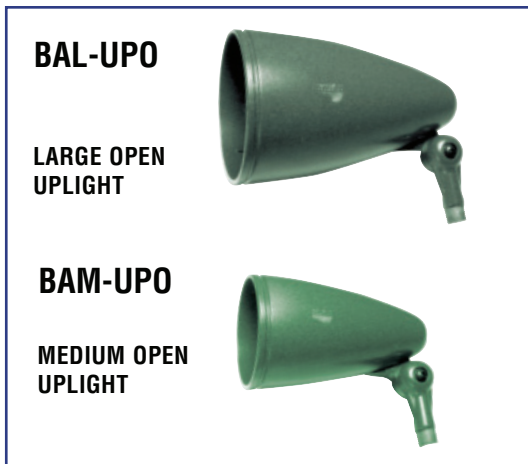

LAMP TYPES: Incandescent.

HOUSING: Die Cast Aluminum alloy.

SHIELDS: CS Shields are die cast aluminum.

FINISH: Each fixture is finished with LSI's DuraGrip® polyester powder coat finishing process. The DuraGrip finish withstands extreme weather changes without cracking or peeling, and is guaranteed for five full years. Standard colors include bronze, black, platinum plus, white, satin verde green, metallic silver, and graphite.

LENS: No lens is required or furnished on UPO versions of the BAL and BAM. However, using shields with lenses is acceptable.

LAMP GASKET: A bonded silicone/aluminum lamp gasket is furnished.

MOUNTING: 1/2" NPSM mounting arm is standard. Mounting arm may be threaded into hubs in tree or surface mounts, spikes, junction boxes. Mounting arm provides a 200°+ range of motion to achieve desired aiming angles.

OPTICS/AIMING: BAL-UPO is designed for use with PAR38 lamps only. BAM-UPO is designed for use with PAR30L-Longneck lamps only.


WIRING: Pre-wired with 200° rated wire. A ground lead is provided.

EXTRA VALUE FEATURES:

- Functional design speeds installation.
- Flow through construction ensures proper drainage.
- Quick ship availability in standard SVG-Satin Verde Green finish.

BAL-UPO and BAM-UPO Series Bullets are intended for use as Uplights only. Due to their flow-through design, with large drain holes, they can NOT be used as downlights.

DIMENSIONS

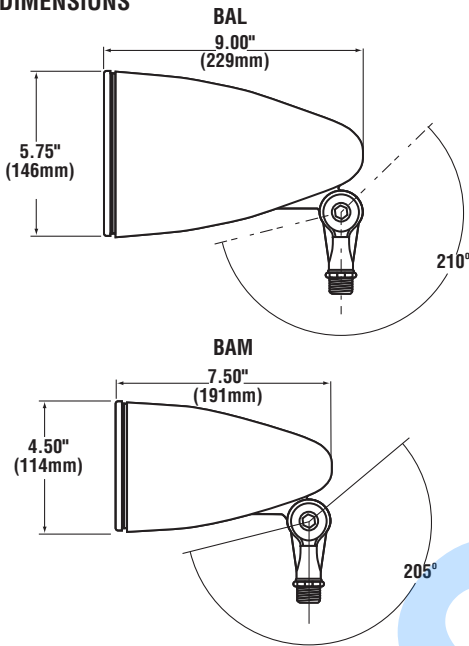

LUMINAIRE ORDERING INFORMATION

TYPICAL ORDER EXAMPLE: **BAL UPO-PAR38 SVG BAL-CSC CTM**

Luminaire Prefix	Optics	Finish	Options	Accessories
BAL ¹	UPO-PAR38 (Uplight ONLY) ^{1,2} INC-Up to 150 watt PAR38	BRZ – Bronze BLK – Black PLP – Platinum Plus BUF – Buff WHT – White	BAL-CSC-Glare Shield w/Convex Lens BAL-CSF-Glare Shield w/Flat Lens BAL-CSN-Glare Shield w/no Lens SPB-Mounting Spike	CTM – Contractor Tree Mount T – Tree Mount J-Box SPB – Mounting Spike/J-Box (PVC) SCI – Spike/J-Box w/6' cord (Iron) SJI – Spike/J-Box (Iron)
BAM ¹	UPO-PAR30L (Uplight ONLY) ^{1,2} INC-Up to 75 watt PAR30L	SVG - Satin Verde Green GPT - Graphite MSV - Metallic Silver	BAM-CSF-Glare Shield w/Flat Lens BAM-CSN-Glare Shield w/no Lens SPB-Mounting Spike	

FOOTNOTES:

- 1- These are uplight housings only and may not be used as downlights.
- 2- For Use Only with lamps rated for open fixtures.



Project Name _____ Fixture Type _____
 Catalog # _____

12/06/11

© 2012
LSI INDUSTRIES INC.