



LiniArc® Wet Location (LAW2)

Uncompromising Performance & Aesthetics



OVERVIEW	
Lumen Package (lm/ft.)	700 - 1,500
Form Factors (ft.)	1, 2, 3, 4, 5, 6, 7, 8
Wattage (W)	8 - 206
Efficacy (LPW)	68 - 128
Fixture Weight lbs./ft. (kg/ft.)	3.0 (1.4)
Controls	IMS1, ALB, 3PC



QUICK LINKS

FEATURES & SPECIFICATIONS

Construction

- 1ft. to 8ft. length in 1ft. increments, 2" nominal width, 3" height (direct), 4" height (direct/indirect)
- Extruded Aluminum housing, Flush or Proud Acrylic cover lens
- Factory-sealed for Outdoor and Indoor applications. Dust and Bug tight. IP 66 rated.
- Operating temperature: -40F to 122F (-40C to 50C)*
- Post-painted for high quality finish.
- Continuous runs with single power feed
- Vandal resistant hardware for added safety, see installation guide for details.

Optical System

- Direct, Direct/Indirect or Indirect Illumination
- Symmetric, Asymmetric or Narrow beam distributions suitable for a wide range of applications
- Variable up/down distribution for maximum versatility
- Minimum color rendering index (CRI) of 80 for accurate color rendering. 90CRI available.

Electrical

- High-performance class 2 driver features overvoltage, under-voltage, short-circuit and over-temperature protection
- Universal Input Voltage (120-277V) or 347V
- 0-10V dimming (0% - 100%) standard. Compatible with most commercially available dimmers.
- L70 Calculated Life: >60k hours
- Power factor (PF): > 0.90
- Total harmonic distortion (THD): <20%
- Integral cold weather (7W) or standard (10W) emergency battery.

Controls

- Available with Standalone (IMS1) or Networked (AirLink Blue or 3rd party) Controls.
- ALB is a low-power wireless Bluetooth mesh control system. ALB provides significant energy savings while ensuring code compliance and security.

Installation

- Rigid stem, aircraft cable (indoor only), surface, recessed, wall or mullion mounting
- See ordering guide for mounting accessories (ordered separately) and install guide for instructions.

Warranty

- LSI luminaires carry a 5-year limited warranty. Refer to <https://www.lsicorp.com/resources/terms-conditions-warranty/> for more information.

Listings

- Certified to UL 1598 and UL 8750.
- Suitable for wet or damp locations.
- IP66
- DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified.
- IDA compliant; with 3000K or lower color temperature selection.

*Maximum ambient temperature for 15L lumen package is 95F (35C). For 12L 104F (40C) and for 10L or lower, 122F (50C).



ORDERING GUIDE

TYPICAL ORDER EXAMPLE: LAW2 W 8 12L 07L 840 PA N I UNV ALBCS GPT							
Prefix	Mounting ^{1,2}	Length (Ft.) ^{1,2,3}	Direct Lumens per Ft. ^{2,3,4}	Indirect Lumens per Ft. ^{2,3,4}	CCT & CRI ⁵	Lens ^{6,7}	Distribution ^{8,9}
LAW2 - LiniArc® 2" Wet Location	T - Rigid Stem (3/8")	1	0L - 100% Indirect	0L - 100% Direct	830 835 840 850 927 930 935 940 950	FA - Diffuse Flush Acrylic PA - 3/8" Diffuse Proud Acrylic CA - Clear Flush Acrylic	S - Wide Symmetric Lambertian N - Narrow Spot/Wall Graze A - Asymmetric/Forward Throw R - Asymmetric/Reverse Throw (Wall Wash) N, A, R distributions only available with CA lens
	S - Direct to Surface	2	03L - 300lm/ft.	03L - 300lm/ft.			
	W - Wall	3	05L - 500lm/ft.	05L - 500lm/ft.			
	R - Recessed	4	07L - 700lm/ft.	07L - 700lm/ft.			
	P - Aircraft Cable Pendant Drywall (Damp Loc. Use Only)	5	10L - 1,000lm/ft.	10L - 1,000lm/ft.			
	G - Aircraft Cable Pendant Grid (Damp Loc. Use Only)	6	12L - 1,200lm/ft.	12L - 1,200lm/ft.			
	M - Mullion	7	15L - 1,500lm/ft.	15L - 1,500lm/ft.			
		8	0L (direct) - 0L (indirect) is not a valid combination				
Position ⁸	Input Voltage (V)	Controls ^{10,11}	Finish and Color ⁵	Options ^{12,13,14,15}			
S - Starter (1x Feed Kit, 1x Non Feed Kit) J - Joiner (2x Non Feed Kit) E - Ender (1x Non Feed Kit) I - Individual (1x Feed Kit)	UNV - 120-277VAC HV - 347VAC	Blank - 0-10V Dimming Std. IMS1 - Standalone Motion and Bi-level Daylight Sensor (remote sold separately) ALBC - Integrated AirLink Blue Controller ALBCSD - Integrated AirLink Blue Motion and Daylight Harvesting up to 40ft. (Damp Loc) ALBCS - Integrated AirLink Blue Motion and Photocell up to 40ft. (Wet Loc) 3PC - Contact Factory for 3rd Party Controls Integration.	WHT - Matte White BLK - Matte Black MSV - Metallic Silver BRZ - Textured Dark Bronze GMG - Gun Metal Gray GPT - Graphite PLP - Platinum Plus SVG - Satin Verde Green RAL XXX - Custom	Blank - None SP1 - 10kV Surge Protection Device CWBB - 7W Cold Weather EM (-20C to 40C). See Notes for More Information. EM10 - 10W Standard EM (0 to 40C). See Notes for More Information. For Remote EM options up to 200W, see accessories ordering information.			




Need more information?
[Click here for our glossary](#)

Have additional questions?
Call us at (800) 436-7800




Optical Distributions


Wide Symmetric Lambertian (S)

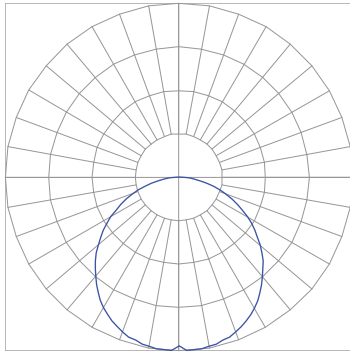


Narrow Spot/Wall Graze (N)

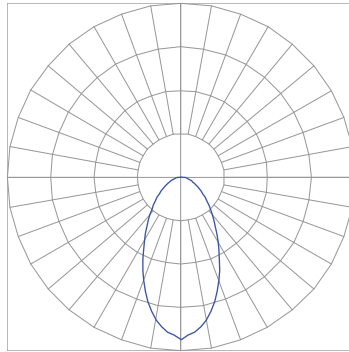

Asymmetric/Forward Throw (A)

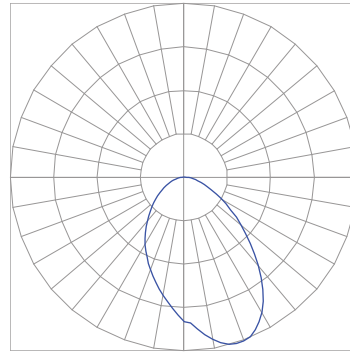

Asymmetric/Reverse Throw (R)

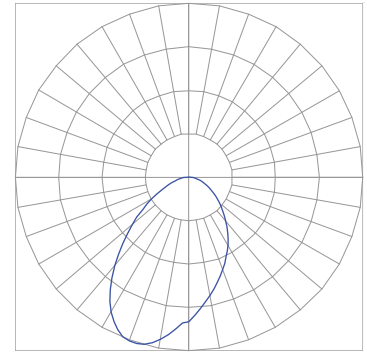

Vertical Plane

1 Single feed continuous run available for direct only, stem, wall, or pendant mount.

2 1ft. configuration limited to 10L lumen package for direct or indirect only and 07L package for direct/indirect.

3 Direct/Indirect illumination only for Wall or Mullion mount.

4 03L and 05L lumen packages not available in 1ft or 2ft. lengths.

5 Contact factory for 90 CRI or custom finishes; extended lead times may apply. See CRI proration table.

6 Proud lens not offered for recessed mount configuration.

7 Asymmetric and Narrow Distributions available only with Clear Acrylic (CA) lens.

8 Distributions will be the same for Direct/Indirect configurations. Consult factory for other options.

9 Starter or Joiner configuration not available in 1ft.

10 Integral sensor will increase overall length by 3".

11 For integral controls on 1ft version, 3" box required.

12 Integral EM available with lengths 3ft. and longer, for 10L and lower lumen packages up to 104F (40C) ambient temperature. Integral EM not available for continuous run configurations.

13 Remote EM ships separate from fixture.

14 Not all combinations or options have DLC listing. Contact factory for details.

15 Surge Protector not available in 1ft length.

ORDERING GUIDE

ACCESSORIES ORDERING INFORMATION

Part Number	Order Number	Description
Emergency (Remote Only)	778196	8W Remote EM (up to 60W input)
	801387	25W Remote EM (up to 200W input)
	786277	8W Remote EM (up to 60W input) with Grid Mount Kit
Beauty Plate Set (Matching Paint Finish)	815587	Snap-in End Plate Hardware Covers, Direct Only, Flush Lens
	817861	Snap-in End Plate Hardware Covers, Direct/Indirect, Flush Lens
	817856	Snap-in End Plate Hardware Covers, Direct Only, Drop Lens
	817917	Snap-in End Plate Hardware Covers, Direct/Indirect, Drop Lens
Canopy Set (4")	M38174BZ	Swivel Mount, 3/8 IP Bronze
	M38174WH	Swivel Mount, 3/8 IP White
	M38174BL	Swivel Mount, 3/8 IP Black
	M38174SLV	Swivel Mount, 3/8 IP Bronze
	M38248BZ	Straight Mount, 3/8 IP Bronze
	M38248BWH	Straight Mount, 3/8 IP White
	M38248BL	Straight Mount, 3/8 IP Black
	M38248SLV	Straight Mount, 3/8 IP Metallic Silver
Rigid Stem (Single)	M38265BZ	12" Stem 3/8 IP Bronze
	M38248BZ	24" Stem 3/8 IP Bronze
	M38175BZ	36" Stem 3/8 IP Bronze
	M38176BZ	48" Stem 3/8 IP Bronze
	M38301BZ	60" Stem 3/8 IP Bronze
	M38265WH	12" Stem 3/8 IP White
	M38248WH	24" Stem 3/8 IP White
	M38175WH	36" Stem 3/8 IP White
	M38176WH	48" Stem 3/8 IP White
	M38301WH	60" Stem 3/8 IP White
	M38265BL	12" Stem 3/8 IP Black
	M38248BL	24" Stem 3/8 IP Black
	M38175BL	36" Stem 3/8 IP Black
	M38176BL	48" Stem 3/8 IP Black
	M38301BL	60" Stem 3/8 IP Black
	M38265SLV	12" Stem 3/8 IP Metallic Silver
	M38248SLV	24" Stem 3/8 IP Metallic Silver
M38175SLV	36" Stem 3/8 IP Metallic Silver	
M38176SLV	48" Stem 3/8 IP Metallic Silver	
M38301SLV	60" Stem 3/8 IP Metallic Silver	

Part Number	Order Number	Description
Cable and Canopy (Set)	M38265BZ	12" Stem 3/8 IP Bronze
	M38248BZ	24" Stem 3/8 IP Bronze
	M38175BZ	36" Stem 3/8 IP Bronze
	M38176BZ	48" Stem 3/8 IP Bronze
	M38301BZ	60" Stem 3/8 IP Bronze
	M38265WH	12" Stem 3/8 IP White
	M38248WH	24" Stem 3/8 IP White
	M38175WH	36" Stem 3/8 IP White
	M38176WH	48" Stem 3/8 IP White
	M38301WH	60" Stem 3/8 IP White
M38265BL	12" Stem 3/8 IP Black	
M38248BL	24" Stem 3/8 IP Black	
M38175BL	36" Stem 3/8 IP Black	
M38176BL	48" Stem 3/8 IP Black	
M38301BL	60" Stem 3/8 IP Black	
M38265SLV	12" Stem 3/8 IP Metallic Silver	
M38248SLV	24" Stem 3/8 IP Metallic Silver	
M38175SLV	36" Stem 3/8 IP Metallic Silver	
M38176SLV	48" Stem 3/8 IP Metallic Silver	
M38301SLV	60" Stem 3/8 IP Metallic Silver	

Recommended Lumen Maintenance - LAW2²

Ambient Temperature (C°)	Initial ¹	25K hrs. ³	50K hrs. ³	75K hrs. ⁴	100K hrs. ⁴
0	100%	96%	92%	88%	84%
10	100%	96%	92%	88%	84%
20	100%	96%	92%	88%	84%
25	100%	96%	92%	88%	84%
30	100%	96%	91%	87%	83%
40	100%	95%	91%	86%	82%
50	100%	95%	90%	85%	80%

Note: Maximum ambient temperature for 15L lumen package is 95F (35C). For 12L 104F (40C) and for 10L or lower, 122F (50C).

Lumen & Wattage Proration Factor

03L	0.4
05L	0.7
07L	1.0

Note: 03L and 05L lumen packages not available in 1ft or 2ft. lengths.

CRI Proration Factor

80	1.0
90	0.8

¹ Electrical data at 25C (77F). Actual wattage may differ by +/-10%.

² Lumen maintenance values at 40C are calculated per TM-21 based on LM-80 data and in-situ testing.

³ In accordance with IESNA TM-21-11, Projected Values represent interpolated value based on time durations that are within six times the IESNA LM-80-08 total test duration for the device under testing.

⁴ In accordance with IESNA TM-21-11, Calculated Values represent time durations that exceed six times the IESNA LM-80-08 total test duration for the device under testing.

PERFORMANCE

Delivered Lumens - LAW2																
Length (ft.)	Lumen Package	Lens	Distribution	2700K 90CRI		3000K 80CRI		3500K 80CRI		4000K 80CRI		5000K 80CRI		Wattage		
				Direct	Indirect	Direct	Indirect	Direct	Indirect	Direct	Indirect	Direct	Indirect			
1	07L	CA	A	558	-	697	-	742	-	765	-	757	-	8		
				-	558	-	697	-	742	-	765	-	757			
				558	558	697	697	742	742	765	765	757	757			
			N	566	-	707	-	753	-	776	-	768	-	8		
				-	566	-	707	-	753	-	776	-	768			
				566	566	707	707	753	753	776	776	768	768			
		FA	S	547	-	683	-	728	-	750	-	742	-	8		
				-	547	-	683	-	728	-	750	-	742			
				547	547	683	683	728	728	750	750	742	742			
			PA	573	-	716	-	763	-	786	-	778	-	8		
				-	573	-	716	-	763	-	786	-	778			
				573	573	716	716	763	763	786	786	778	778			
1	10L	CA	A	713	-	891	-	949	-	978	-	968	-	10		
				-	713	-	891	-	949	-	978	-	968			
			N	724	-	904	-	963	-	993	-	982	-			
				-	724	-	904	-	963	-	993	-	982			
		FA	S	699	-	873	-	930	-	959	-	949	-			
				-	699	-	873	-	930	-	959	-	949			
		PA	733	-	916	-	976	-	1,006	-	995	-				
			-	733	-	916	-	976	-	1,006	-	995				
		2	07L	CA	A	1,007	-	1,258	-	1,340	-	1,381	-	1,367	-	12
						-	1,007	-	1,258	-	1,340	-	1,381	-	1,367	
1,007	1,007					1,258	1,258	1,340	1,340	1,381	1,381	1,367	1,367			
N	1,022				-	1,277	-	1,360	-	1,402	-	1,387	-	12		
	-				1,022	-	1,277	-	1,360	-	1,402	-	1,387			
	1,022				1,022	1,277	1,277	1,360	1,360	1,402	1,402	1,387	1,387			
FA	S			987	-	1,233	-	1,314	-	1,354	-	1,339	-	12		
				-	987	-	1,233	-	1,314	-	1,354	-	1,339			
	S			987	987	1,233	1,233	1,314	1,314	1,354	1,354	1,339	1,339	24		
				1,035	-	1,293	-	1,377	-	1,420	-	1,405	-		12	
PA	-			1,035	-	1,293	-	1,377	-	1,420	-	1,405	-			
	1,035			1,035	1,293	1,293	1,377	1,377	1,420	1,420	1,405	1,405	24			
2	10L	CA	A	1,450	-	1,811	-	1,929	-	1,989	-	1,967	-	18		
				-	1,450	-	1,811	-	1,929	-	1,989	-	1,967			
				1,450	1,450	1,811	1,811	1,929	1,929	1,989	1,989	1,967	1,967			
			N	1,471	-	1,837	-	1,957	-	2,018	-	1,996	-	18		
				-	1,471	-	1,837	-	1,957	-	2,018	-	1,996			
				1,471	1,471	1,837	1,837	1,957	1,957	2,018	2,018	1,996	1,996			
		FA	S	1,421	-	1,775	-	1,891	-	1,949	-	1,928	-	18		
				-	1,421	-	1,775	-	1,891	-	1,949	-	1,928			
			S	1,421	1,421	1,775	1,775	1,891	1,891	1,949	1,949	1,928	1,928	36		
				1,490	-	1,861	-	1,983	-	2,044	-	2,022	-		18	
		PA	-	1,490	-	1,861	-	1,983	-	2,044	-	2,022	-			
			1,490	1,490	1,861	1,861	1,983	1,983	2,044	2,044	2,022	2,022	36			

PERFORMANCE

Delivered Lumens - LAW2																
Length (ft.)	Lumen Package	Lens	Distribution	2700K 90CRI		3000K 80CRI		3500K 80CRI		4000K 80CRI		5000K 80CRI		Wattage		
				Direct	Indirect	Direct	Indirect	Direct	Indirect	Direct	Indirect	Direct	Indirect			
2	12L	CA	A	1,639	-	2,048	-	2,182	-	2,249	-	2,225	-	21		
				-	1,639	-	2,048	-	2,182	-	2,249	-	2,225			
				1,639	1,639	2,048	2,048	2,182	2,182	2,249	2,249	2,225	2,225			
				1,663	-	2,078	-	2,213	-	2,282	-	2,257	-			
			N	-	1,663	-	2,078	-	2,213	-	2,282	-	2,257	-	21	
				1,663	1,663	2,078	2,078	2,213	2,213	2,282	2,282	2,257	2,257			
				1,607	-	2,007	-	2,138	-	2,204	-	2,180	-	21		
				-	1,607	-	2,007	-	2,138	-	2,204	-	2,180			
		S	1,607	1,607	2,007	2,007	2,138	2,138	2,204	2,204	2,180	2,180				
			1,685	-	2,105	-	2,242	-	2,311	-	2,286	-	21			
		PA	-	1,685	-	2,105	-	2,242	-	2,311	-	2,286				
			1,685	1,685	2,105	2,105	2,242	2,242	2,311	2,311	2,286	2,286				
		2	15L	CA	A	2,163	-	2,702	-	2,878	-	2,967	-	2,935	-	27
						-	2,163	-	2,702	-	2,878	-	2,967	-	2,935	
2,163	2,163					2,702	2,702	2,878	2,878	2,967	2,967	2,935	2,935			
2,195	-					2,742	-	2,920	-	3,010	-	2,978	-	27		
N	-				2,195	-	2,742	-	2,920	-	3,010	-	2,978			
	2,195				2,195	2,742	2,742	2,920	2,920	3,010	3,010	2,978	2,978			
FA	2,120				-	2,648	-	2,821	-	2,908	-	2,877	-	27		
	-				2,120	-	2,648	-	2,821	-	2,908	-	2,877			
S	2,120			2,120	2,648	2,648	2,821	2,821	2,908	2,908	2,877	2,877				
	2,223			-	2,777	-	2,958	-	3,049	-	3,016	-	27			
PA	-			2,223	-	2,777	-	2,958	-	3,049	-	3,016				
	2,223			2,223	2,777	2,777	2,958	2,958	3,049	3,049	3,016	3,016				
3	07L			CA	A	1,549	-	1,935	-	2,061	-	2,124	-	2,101	-	18
						-	1,549	-	1,935	-	2,061	-	2,124	-	2,101	
		1,549	1,549			1,935	1,935	2,061	2,061	2,124	2,124	2,101	2,101			
		1,571	-			1,963	-	2,091	-	2,155	-	2,132	-	18		
		N	-		1,571	-	1,963	-	2,091	-	2,155	-	2,132			
			1,571		1,571	1,963	1,963	2,091	2,091	2,155	2,155	2,132	2,132			
		FA	1,518		-	1,896	-	2,020	-	2,082	-	2,060	-	18		
			-		1,518	-	1,896	-	2,020	-	2,082	-	2,060			
		S	1,518	1,518	1,896	1,896	2,020	2,020	2,082	2,082	2,060	2,060				
			1,592	-	1,988	-	2,118	-	2,183	-	2,160	-	18			
		PA	-	1,592	-	1,988	-	2,118	-	2,183	-	2,160				
			1,592	1,592	1,988	1,988	2,118	2,118	2,183	2,183	2,160	2,160				
		3	10L	CA	A	2,213	-	2,764	-	2,945	-	3,035	-	3,003	-	26
						-	2,213	-	2,764	-	2,945	-	3,035	-	3,003	
2,213	2,213					2,764	2,764	2,945	2,945	3,035	3,035	3,003	3,003			
2,245	-					2,805	-	2,988	-	3,080	-	3,047	-	26		
N	-				2,245	-	2,805	-	2,988	-	3,080	-	3,047			
	2,245				2,245	2,805	2,805	2,988	2,988	3,080	3,080	3,047	3,047			
FA	2,169				-	2,709	-	2,886	-	2,975	-	2,943	-	26		
	-				2,169	-	2,709	-	2,886	-	2,975	-	2,943			
S	2,169			2,169	2,709	2,709	2,886	2,886	2,975	2,975	2,943	2,943				
	2,274			-	2,841	-	3,026	-	3,119	-	3,086	-	26			
PA	-			2,274	-	2,841	-	3,026	-	3,119	-	3,086				
	2,274			2,274	2,841	2,841	3,026	3,026	3,119	3,119	3,086	3,086				

PERFORMANCE

Delivered Lumens - LAW2															
Length (ft.)	Lumen Package	Lens	Distribution	2700K 90CRI		3000K 80CRI		3500K 80CRI		4000K 80CRI		5000K 80CRI		Wattage	
				Direct	Indirect	Direct	Indirect	Direct	Indirect	Direct	Indirect	Direct	Indirect		
3	12L	CA	A	2,641	-	3,300	-	3,515	-	3,623	-	3,584	-	31	
				-	2,641	-	3,300	-	3,515	-	3,623	-	3,584		-
				2,641	2,641	3,300	3,300	3,515	3,515	3,623	3,623	3,584	3,584		
			N	2,680	-	3,348	-	3,566	-	3,676	-	3,637	-	31	
				-	2,680	-	3,348	-	3,566	-	3,676	-	3,637		-
				2,680	2,680	3,348	3,348	3,566	3,566	3,676	3,676	3,637	3,637		
		FA	S	2,589	-	3,234	-	3,445	-	3,551	-	3,513	-	31	
				-	2,589	-	3,234	-	3,445	-	3,551	-	3,513		-
				2,589	2,589	3,234	3,234	3,445	3,445	3,551	3,551	3,513	3,513		
		PA	S	2,714	-	3,391	-	3,612	-	3,723	-	3,683	-	31	
				-	2,714	-	3,391	-	3,612	-	3,723	-	3,683		-
				2,714	2,714	3,391	3,391	3,612	3,612	3,723	3,723	3,683	3,683		
3	15L	CA	A	3,311	-	4,136	-	4,406	-	4,541	-	4,493	-	39	
				-	3,311	-	4,136	-	4,406	-	4,541	-	4,493		-
				3,311	3,311	4,136	4,136	4,406	4,406	4,541	4,541	4,493	4,493		
			N	3,359	-	4,196	-	4,470	-	4,608	-	4,558	-	39	
				-	3,359	-	4,196	-	4,470	-	4,608	-	4,558		-
				3,359	3,359	4,196	4,196	4,470	4,470	4,608	4,608	4,558	4,558		
		FA	S	3,245	-	4,054	-	4,318	-	4,451	-	4,403	-	39	
				-	3,245	-	4,054	-	4,318	-	4,451	-	4,403		-
				3,245	3,245	4,054	4,054	4,318	4,318	4,451	4,451	4,403	4,403		
		PA	S	3,402	-	4,250	-	4,528	-	4,667	-	4,617	-	39	
				-	3,402	-	4,250	-	4,528	-	4,667	-	4,617		-
				3,402	3,402	4,250	4,250	4,528	4,528	4,667	4,667	4,617	4,617		
4	07L	CA	A	2,110	-	2,635	-	2,807	-	2,894	-	2,863	-	24	
				-	2,110	-	2,635	-	2,807	-	2,894	-	2,863		-
				2,110	2,110	2,635	2,635	2,807	2,807	2,894	2,894	2,863	2,863		
			N	2,140	-	2,674	-	2,848	-	2,936	-	2,904	-	24	
				-	2,140	-	2,674	-	2,848	-	2,936	-	2,904		-
				2,140	2,140	2,674	2,674	2,848	2,848	2,936	2,936	2,904	2,904		
		FA	S	2,068	-	2,583	-	2,751	-	2,836	-	2,806	-	24	
				-	2,068	-	2,583	-	2,751	-	2,836	-	2,806		-
				2,068	2,068	2,583	2,583	2,751	2,751	2,836	2,836	2,806	2,806		
		PA	S	2,168	-	2,708	-	2,885	-	2,974	-	2,942	-	24	
				-	2,168	-	2,708	-	2,885	-	2,974	-	2,942		-
				2,168	2,168	2,708	2,708	2,885	2,885	2,974	2,974	2,942	2,942		
4	10L	CA	A	2,933	-	3,664	-	3,903	-	4,023	-	3,980	-	33	
				-	2,933	-	3,664	-	3,903	-	4,023	-	3,980		-
				2,933	2,933	3,664	3,664	3,903	3,903	4,023	4,023	3,980	3,980		
			N	2,976	-	3,717	-	3,960	-	4,082	-	4,038	-	33	
				-	2,976	-	3,717	-	3,960	-	4,082	-	4,038		-
				2,976	2,976	3,717	3,717	3,960	3,960	4,082	4,082	4,038	4,038		
		FA	S	2,875	-	3,591	-	3,825	-	3,943	-	3,901	-	33	
				-	2,875	-	3,591	-	3,825	-	3,943	-	3,901		-
				2,875	2,875	3,591	3,591	3,825	3,825	3,943	3,943	3,901	3,901		
		PA	S	3,014	-	3,765	-	4,011	-	4,134	-	4,090	-	33	
				-	3,014	-	3,765	-	4,011	-	4,134	-	4,090		-
				3,014	3,014	3,765	3,765	4,011	4,011	4,134	4,134	4,090	4,090		

PERFORMANCE

Delivered Lumens - LAW2																
Length (ft.)	Lumen Package	Lens	Distribution	2700K 90CRI		3000K 80CRI		3500K 80CRI		4000K 80CRI		5000K 80CRI		Wattage		
				Direct	Indirect	Direct	Indirect	Direct	Indirect	Direct	Indirect	Direct	Indirect			
4	12L	CA	A	3,541	-	4,424	-	4,712	-	4,858	-	4,806	-	40		
				-	3,541	-	4,424	-	4,712	-	4,858	-	4,806			
				3,541	3,541	4,424	4,424	4,712	4,712	4,858	4,858	4,806	4,806			
				3,593	-	4,489	-	4,781	-	4,928	-	4,876	-			
			N	-	3,593	-	4,489	-	4,781	-	4,928	-	4,876	-	40	
				3,593	3,593	4,489	4,489	4,781	4,781	4,928	4,928	4,876	4,876			
				3,471	-	4,336	-	4,619	-	4,761	-	4,710	-	40		
				-	3,471	-	4,336	-	4,619	-	4,761	-	4,710			
		S	3,471	3,471	4,336	4,336	4,619	4,619	4,761	4,761	4,710	4,710				
			3,639	-	4,546	-	4,843	-	4,992	-	4,939	-	40			
		PA	-	3,639	-	4,546	-	4,843	-	4,992	-	4,939		-		
			3,639	3,639	4,546	4,546	4,843	4,843	4,992	4,992	4,939	4,939				
		4	15L	CA	A	4,457	-	5,568	-	5,931	-	6,114	-	6,048	-	52
						-	4,457	-	5,568	-	5,931	-	6,114	-	6,048	
4,457	4,457					5,568	5,568	5,931	5,931	6,114	6,114	6,048	6,048			
4,522	-					5,649	-	6,017	-	6,203	-	6,136	-			
N	-				4,522	-	5,649	-	6,017	-	6,203	-	6,136	-	52	
	4,522				4,522	5,649	5,649	6,017	6,017	6,203	6,203	6,136	6,136			
	4,368				-	5,457	-	5,813	-	5,992	-	5,671	-	52		
	-				4,368	-	5,457	-	5,813	-	5,992	-	5,671			
S	4,368			4,368	5,457	5,457	5,813	5,813	5,992	5,992	5,671	5,671				
	4,580			-	5,722	-	6,095	-	6,283	-	6,216	-	52			
PA	-			4,580	-	5,722	-	6,095	-	6,283	-	6,216		-		
	4,580			4,580	5,722	5,722	6,095	6,095	6,283	6,283	6,216	6,216				
5	07L			CA	A	2,600	-	3,249	-	3,460	-	3,567	-	3,529	-	30
						-	2,600	-	3,249	-	3,460	-	3,567	-	3,529	
		2,600	2,600			3,249	3,249	3,460	3,460	3,567	3,567	3,529	3,529			
		2,579	-			3,222	-	3,432	-	3,538	-	3,500	-			
		N	-		2,579	-	3,222	-	3,432	-	3,538	-	3,500	-	30	
			2,579		2,579	3,222	3,222	3,432	3,432	3,538	3,538	3,500	3,500			
			2,452		-	3,064	-	3,263	-	3,364	-	3,328	-	30		
			-		2,452	-	3,064	-	3,263	-	3,364	-	3,328			
		S	2,452	2,452	3,064	3,064	3,263	3,263	3,364	3,364	3,328	3,328				
			2,579	-	3,222	-	3,432	-	3,538	-	3,500	-	30			
		PA	-	2,579	-	3,222	-	3,432	-	3,538	-	3,500		-		
			2,579	2,579	3,222	3,222	3,432	3,432	3,538	3,538	3,500	3,500				
		5	10L	CA	A	3,766	-	4,705	-	5,012	-	5,166	-	5,111	-	41
						-	3,766	-	4,705	-	5,012	-	5,166	-	5,111	
3,766	3,766					4,705	4,705	5,012	5,012	5,166	5,166	5,111	5,111			
3,705	-					4,628	-	4,930	-	5,082	-	5,028	-			
N	-				3,705	-	4,628	-	4,930	-	5,082	-	5,028	-	41	
	3,705				3,705	4,628	4,628	4,930	4,930	5,082	5,082	5,028	5,028			
	3,705				-	4,628	-	4,930	-	5,082	-	5,028	-	41		
	-				3,705	-	4,628	-	4,930	-	5,082	-	5,028			
S	3,705			3,705	4,628	4,628	4,930	4,930	5,082	5,082	5,028	5,028				
	3,858			-	4,820	-	5,134	-	5,292	-	5,235	-	41			
PA	-			3,858	-	4,820	-	5,134	-	5,292	-	5,235		-		
	3,858			3,858	4,820	4,820	5,134	5,134	5,292	5,292	5,235	5,235				

PERFORMANCE

Delivered Lumens - LAW2															
Length (ft.)	Lumen Package	Lens	Distribution	2700K 90CRI		3000K 80CRI		3500K 80CRI		4000K 80CRI		5000K 80CRI		Wattage	
				Direct	Indirect	Direct	Indirect	Direct	Indirect	Direct	Indirect	Direct	Indirect		
5	12L	CA	A	4,587	-	5,730	-	6,104	-	6,292	-	6,225	-	50	
				-	4,587	-	5,730	-	6,104	-	6,292	-	6,225		
				4,587	4,587	5,730	5,730	6,104	6,104	6,292	6,292	6,225	6,225		
			N	4,622	-	5,774	-	6,151	-	6,340	-	6,272	-		50
				-	4,622	-	5,774	-	6,151	-	6,340	-	6,272		
				4,622	4,622	5,774	5,774	6,151	6,151	6,340	6,340	6,272	6,272		
		FA	S	4,511	-	5,636	-	6,003	-	6,188	-	6,122	-	50	
				-	4,511	-	5,636	-	6,003	-	6,188	-	6,122		
				4,511	4,511	5,636	5,636	6,003	6,003	6,188	6,188	6,122	6,122		
		PA	S	4,701	-	5,872	-	6,255	-	6,448	-	6,379	-	50	
				-	4,701	-	5,872	-	6,255	-	6,448	-	6,379		
				4,701	4,701	5,872	5,872	6,255	6,255	6,448	6,448	6,379	6,379		
5	15L	CA	A	5,282	-	6,598	-	7,028	-	7,245	-	7,167	-	65	
				-	5,282	-	6,598	-	7,028	-	7,245	-	7,167		
				5,282	5,282	6,598	6,598	7,028	7,028	7,245	7,245	7,167	7,167		
			N	5,497	-	6,867	-	7,315	-	7,540	-	7,459	-		65
				-	5,497	-	6,867	-	7,315	-	7,540	-	7,459		
				5,497	5,497	6,867	6,867	7,315	7,315	7,540	7,540	7,459	7,459		
		FA	S	5,355	-	6,689	-	7,126	-	7,345	-	7,266	-	65	
				-	5,355	-	6,689	-	7,126	-	7,345	-	7,266		
				5,355	5,355	6,689	6,689	7,126	7,126	7,345	7,345	7,266	7,266		
		PA	S	5,544	-	6,926	-	7,378	-	7,605	-	7,523	-	65	
				-	5,544	-	6,926	-	7,378	-	7,605	-	7,523		
				5,544	5,544	6,926	6,926	7,378	7,378	7,605	7,605	7,523	7,523		
6	07L	CA	A	3,228	-	4,033	-	4,296	-	4,428	-	4,381	-	35	
				-	3,228	-	4,033	-	4,296	-	4,428	-	4,381		
				3,228	3,228	4,033	4,033	4,296	4,296	4,428	4,428	4,381	4,381		
			N	3,202	-	4,000	-	4,261	-	4,392	-	4,345	-		35
				-	3,202	-	4,000	-	4,261	-	4,392	-	4,345		
				3,202	3,202	4,000	4,000	4,261	4,261	4,392	4,392	4,345	4,345		
		FA	S	3,044	-	3,803	-	4,051	-	4,176	-	4,131	-	35	
				-	3,044	-	3,803	-	4,051	-	4,176	-	4,131		
				3,044	3,044	3,803	3,803	4,051	4,051	4,176	4,176	4,131	4,131		
		PA	S	3,201	-	3,999	-	4,260	-	4,391	-	4,344	-	35	
				-	3,201	-	3,999	-	4,260	-	4,391	-	4,344		
				3,201	3,201	3,999	3,999	4,260	4,260	4,391	4,391	4,344	4,344		
6	10L	CA	A	4,573	-	5,713	-	6,086	-	6,273	-	6,206	-	49	
				-	4,573	-	5,713	-	6,086	-	6,273	-	6,206		
				4,573	4,573	5,713	5,713	6,086	6,086	6,273	6,273	6,206	6,206		
			N	4,499	-	5,620	-	5,987	-	6,171	-	6,105	-		49
				-	4,499	-	5,620	-	5,987	-	6,171	-	6,105		
				4,499	4,499	5,620	5,620	5,987	5,987	6,171	6,171	6,105	6,105		
		FA	S	4,499	-	5,620	-	5,987	-	6,171	-	6,105	-	49	
				-	4,499	-	5,620	-	5,987	-	6,171	-	6,105		
				4,499	4,499	5,620	5,620	5,987	5,987	6,171	6,171	6,105	6,105		
		PA	S	4,685	-	5,852	-	6,234	-	6,426	-	6,357	-	49	
				-	4,685	-	5,852	-	6,234	-	6,426	-	6,357		
				4,685	4,685	5,852	5,852	6,234	6,234	6,426	6,426	6,357	6,357		

PERFORMANCE

Delivered Lumens - LAW2														
Length (ft.)	Lumen Package	Lens	Distribution	2700K 90CRI		3000K 80CRI		3500K 80CRI		4000K 80CRI		5000K 80CRI		Wattage
				Direct	Indirect	Direct	Indirect	Direct	Indirect	Direct	Indirect	Direct	Indirect	
6	12L	CA	A	5,468	-	6,830	-	7,276	-	7,500	-	7,420	-	60
				-	5,468	-	6,830	-	7,276	-	7,500	-	7,420	
				5,468	5,468	6,830	6,830	7,276	7,276	7,500	7,500	7,420	7,420	
			N	5,514	-	6,889	-	7,338	-	7,564	-	7,483	-	60
				-	5,514	-	6,889	-	7,338	-	7,564	-	7,483	
				5,514	5,514	6,889	6,889	7,338	7,338	7,564	7,564	7,483	7,483	
		FA	S	5,373	-	6,712	-	7,150	-	7,370	-	7,291	-	60
				-	5,373	-	6,712	-	7,150	-	7,370	-	7,291	
				5,373	5,373	6,712	6,712	7,150	7,150	7,370	7,370	7,291	7,291	
			PA	5,605	-	7,002	-	7,458	-	7,688	-	7,606	-	60
				-	5,605	-	7,002	-	7,458	-	7,688	-	7,606	
				5,605	5,605	7,002	7,002	7,458	7,458	7,688	7,688	7,606	7,606	
6	15L	CA	A	6,426	-	8,027	-	8,551	-	8,814	-	8,720	-	77
				-	6,426	-	8,027	-	8,551	-	8,814	-	8,720	
				6,426	6,426	8,027	8,027	8,551	8,551	8,814	8,814	8,720	8,720	
			N	6,596	-	8,240	-	8,778	-	9,048	-	8,951	-	77
				-	6,596	-	8,240	-	8,778	-	9,048	-	8,951	
				6,596	6,596	8,240	8,240	8,778	8,778	9,048	9,048	8,951	8,951	
		FA	S	6,426	-	8,028	-	8,552	-	8,815	-	8,721	-	77
				-	6,426	-	8,028	-	8,552	-	8,815	-	8,721	
				6,426	6,426	8,028	8,028	8,552	8,552	8,815	8,815	8,721	8,721	
			PA	6,653	-	8,311	-	8,853	-	9,126	-	9,028	-	77
				-	6,653	-	8,311	-	8,853	-	9,126	-	9,028	
				6,653	6,653	8,311	8,311	8,853	8,853	9,126	9,126	9,028	9,028	
7	07L	CA	A	3,677	-	4,593	-	4,892	-	5,043	-	4,989	-	41
				-	3,677	-	4,593	-	4,892	-	5,043	-	4,989	
				3,677	3,677	4,593	4,593	4,892	4,892	5,043	5,043	4,989	4,989	
			N	3,706	-	4,630	-	4,932	-	5,084	-	5,030	-	41
				-	3,706	-	4,630	-	4,932	-	5,084	-	5,030	
				3,706	3,706	4,630	4,630	4,932	4,932	5,084	5,084	5,030	5,030	
		FA	S	3,587	-	4,481	-	4,773	-	4,920	-	4,867	-	41
				-	3,587	-	4,481	-	4,773	-	4,920	-	4,867	
				3,587	3,587	4,481	4,481	4,773	4,773	4,920	4,920	4,867	4,867	
			PA	3,766	-	4,705	-	5,012	-	5,166	-	5,111	-	41
				-	3,766	-	4,705	-	5,012	-	5,166	-	5,111	
				3,766	3,766	4,705	4,705	5,012	5,012	5,166	5,166	5,111	5,111	
7	10L	CA	A	5,201	-	6,497	-	6,921	-	7,134	-	7,058	-	57
				-	5,201	-	6,497	-	6,921	-	7,134	-	7,058	
				5,201	5,201	6,497	6,497	6,921	6,921	7,134	7,134	7,058	7,058	
			N	5,116	-	6,392	-	6,808	-	7,018	-	6,943	-	57
				-	5,116	-	6,392	-	6,808	-	7,018	-	6,943	
				5,116	5,116	6,392	6,392	6,808	6,808	7,018	7,018	6,943	6,943	
		FA	S	5,116	-	6,392	-	6,808	-	7,018	-	6,943	-	57
				-	5,116	-	6,392	-	6,808	-	7,018	-	6,943	
				5,116	5,116	6,392	6,392	6,808	6,808	7,018	7,018	6,943	6,943	
			PA	5,328	-	6,656	-	7,090	-	7,308	-	7,230	-	57
				-	5,328	-	6,656	-	7,090	-	7,308	-	7,230	
				5,328	5,328	6,656	6,656	7,090	7,090	7,308	7,308	7,230	7,230	

PERFORMANCE

Delivered Lumens - LAW2																
Length (ft.)	Lumen Package	Lens	Distribution	2700K 90CRI		3000K 80CRI		3500K 80CRI		4000K 80CRI		5000K 80CRI		Wattage		
				Direct	Indirect	Direct	Indirect	Direct	Indirect	Direct	Indirect	Direct	Indirect			
7	12L	CA	A	6,175	-	7,714	-	8,217	-	8,470	-	8,379	-	70		
				-	6,175	-	7,714	-	8,217	-	8,470	-	8,379			
				6,175	6,175	7,714	7,714	8,217	8,217	8,470	8,470	8,379	8,379			
			N	6,226	-	7,778	-	8,285	-	8,540	-	8,448	-	70		
				-	6,226	-	7,778	-	8,285	-	8,540	-	8,448			
				6,226	6,226	7,778	7,778	8,285	8,285	8,540	8,540	8,448	8,448			
		FA	6,073	-	7,586	-	8,081	-	8,330	-	8,241	-	70			
			-	6,073	-	7,586	-	8,081	-	8,330	-	8,241				
			6,073	6,073	7,586	7,586	8,081	8,081	8,330	8,330	8,241	8,241				
		PA	6,379	-	7,969	-	8,489	-	8,750	-	8,656	-	70			
			-	6,379	-	7,969	-	8,489	-	8,750	-	8,656				
			6,379	6,379	7,969	7,969	8,489	8,489	8,750	8,750	8,656	8,656				
		7	15L	CA	A	7,085	-	8,850	-	9,428	-	9,718	-	9,614	-	90
						-	7,085	-	8,850	-	9,428	-	9,718	-	9,614	
7,085	7,085					8,850	8,850	9,428	9,428	9,718	9,718	9,614	9,614			
N	7,273				-	9,085	-	9,678	-	9,976	-	9,869	-	90		
	-				7,273	-	9,085	-	9,678	-	9,976	-	9,869			
	7,273				7,273	9,085	9,085	9,678	9,678	9,976	9,976	9,869	9,869			
FA	7,022			-	8,772	-	9,344	-	9,632	-	9,529	-	90			
	-			7,022	-	8,772	-	9,344	-	9,632	-	9,529				
	7,022			7,022	8,772	8,772	9,344	9,344	9,632	9,632	9,529	9,529				
PA	7,363			-	9,198	-	9,798	-	10,100	-	9,992	-	90			
	-			7,363	-	9,198	-	9,798	-	10,100	-	9,992				
	7,363			7,363	9,198	9,198	9,798	9,798	10,100	10,100	9,992	9,992				
8	07L			CA	A	4,220	-	5,271	-	5,615	-	5,788	-	5,726	-	47
						-	4,220	-	5,271	-	5,615	-	5,788	-	5,726	
		4,220	4,220			5,271	5,271	5,615	5,615	5,788	5,788	5,726	5,726			
		N	4,281		-	5,348	-	5,697	-	5,872	-	5,809	-	47		
			-		4,281	-	5,348	-	5,697	-	5,872	-	5,809			
			4,281		4,281	5,348	5,348	5,697	5,697	5,872	5,872	5,809	5,809			
		FA	4,135	-	5,166	-	5,503	-	5,672	-	5,611	-	47			
			-	4,135	-	5,166	-	5,503	-	5,672	-	5,611				
			4,135	4,135	5,166	5,166	5,503	5,503	5,672	5,672	5,611	5,611				
		PA	4,336	-	5,417	-	5,770	-	5,948	-	5,884	-	47			
			-	4,336	-	5,417	-	5,770	-	5,948	-	5,884				
			4,336	4,336	5,417	5,417	5,770	5,770	5,948	5,948	5,884	5,884				
		8	10L	CA	A	5,866	-	7,328	-	7,806	-	8,046	-	7,960	-	65
						-	5,866	-	7,328	-	7,806	-	8,046	-	7,960	
5,866	5,866					7,328	7,328	7,806	7,806	8,046	8,046	7,960	7,960			
N	5,952				-	7,435	-	7,920	-	8,164	-	8,077	-	65		
	-				5,952	-	7,435	-	7,920	-	8,164	-	8,077			
	5,952				5,952	7,435	7,435	7,920	7,920	8,164	8,164	8,077	8,077			
FA	5,749			-	7,182	-	7,650	-	7,886	-	7,801	-	65			
	-			5,749	-	7,182	-	7,650	-	7,886	-	7,801				
	5,749			5,749	7,182	7,182	7,650	7,650	7,886	7,886	7,801	7,801				
PA	6,028			-	7,530	-	8,021	-	8,268	-	8,179	-	65			
	-			6,028	-	7,530	-	8,021	-	8,268	-	8,179				
	6,028			6,028	7,530	7,530	8,021	8,021	8,268	8,268	8,179	8,179				

PERFORMANCE


Delivered Lumens - LAW2																
Length (ft.)	Lumen Package	Lens	Distribution	2700K 90CRI		3000K 80CRI		3500K 80CRI		4000K 80CRI		5000K 80CRI		Wattage		
				Direct	Indirect	Direct	Indirect	Direct	Indirect	Direct	Indirect	Direct	Indirect			
8	12L	CA	A	7,083	-	8,849	-	9,426	-	9,716	-	9,612	-	80		
				-	7,083	-	8,849	-	9,426	-	9,716	-	9,612			
				7,083	7,083	8,849	8,849	9,426	9,426	9,716	9,716	9,612	9,612		160	
			N	7,185	-	8,976	-	9,561	-	9,856	-	9,750	-	9,750	-	80
				-	7,185	-	8,976	-	9,561	-	9,856	-	9,750	-	9,750	
				7,185	7,185	8,976	8,976	9,561	9,561	9,856	9,856	9,750	9,750	160		
		FA	S	6,926	-	8,652	-	9,216	-	9,500	-	9,398	-	9,398	-	80
				-	6,926	-	8,652	-	9,216	-	9,500	-	9,398	-	9,398	
				6,926	6,926	8,652	8,652	9,216	9,216	9,500	9,500	9,398	9,398	160		
			PA	7,279	-	9,093	-	9,686	-	9,984	-	9,877	-	9,877	-	80
				-	7,279	-	9,093	-	9,686	-	9,984	-	9,877	-	9,877	
				7,279	7,279	9,093	9,093	9,686	9,686	9,984	9,984	9,877	9,877	160		
8	15L	CA	A	8,501	-	10,619	-	11,312	-	11,660	-	11,535	-	103		
				-	8,501	-	10,619	-	11,312	-	11,660	-	11,535			
				8,501	8,501	10,619	10,619	11,312	11,312	11,660	11,660	11,535	11,535		206	
			N	8,627	-	10,778	-	11,480	-	11,834	-	11,707	-	11,707	-	103
				-	8,627	-	10,778	-	11,480	-	11,834	-	11,707	-	11,707	
				8,627	8,627	10,778	10,778	11,480	11,480	11,834	11,834	11,707	11,707	206		
		FA	S	8,384	-	10,473	-	11,156	-	11,500	-	11,377	-	11,377	-	103
				-	8,384	-	10,473	-	11,156	-	11,500	-	11,377	-	11,377	
				8,384	8,384	10,473	10,473	11,156	11,156	11,500	11,500	11,377	11,377	206		
			PA	8,738	-	10,916	-	11,628	-	11,986	-	11,858	-	11,858	-	103
				-	8,738	-	10,916	-	11,628	-	11,986	-	11,858	-	11,858	
				8,738	8,738	10,916	10,916	11,628	11,628	11,986	11,986	11,858	11,858	206		

PERFORMANCE




Direct Only Electrical Data (Amps)*							
Lumen Package (ft.)	Lumen Package	Wattage	120V	208V	240V	277V	347V
1	700	8	0.06	0.04	0.03	0.03	0.02
	1000	10	0.08	0.05	0.04	0.03	0.03
2	700	12	0.10	0.06	0.05	0.04	0.04
	1000	18	0.15	0.08	0.07	0.06	0.05
	1200	21	0.17	0.10	0.09	0.08	0.06
	1500	27	0.22	0.13	0.11	0.10	0.08
3	700	18	0.15	0.09	0.07	0.06	0.05
	1000	26	0.21	0.12	0.11	0.09	0.07
	1200	31	0.26	0.15	0.13	0.11	0.09
	1500	39	0.33	0.19	0.16	0.14	0.11
4	700	24	0.2	0.11	0.10	0.09	0.07
	1000	33	0.27	0.16	0.14	0.12	0.09
	1200	40	0.33	0.19	0.17	0.14	0.12
	1500	52	0.43	0.25	0.22	0.19	0.15
5	700	29	0.24	0.14	0.12	0.10	0.08
	1000	42	0.35	0.20	0.18	0.15	0.12
	1200	52	0.43	0.25	0.22	0.19	0.15
	1500	65	0.54	0.31	0.27	0.23	0.19
6	700	36	0.3	0.17	0.15	0.13	0.10
	1000	51	0.43	0.25	0.21	0.18	0.15
	1200	62	0.52	0.30	0.26	0.22	0.18
	1500	78	0.65	0.38	0.33	0.28	0.22
7	700	41	0.34	0.20	0.17	0.15	0.12
	1000	58	0.48	0.28	0.24	0.21	0.17
	1200	70	0.58	0.34	0.29	0.25	0.20
	1500	91	0.76	0.44	0.38	0.33	0.26
8	700	47	0.39	0.23	0.20	0.17	0.14
	1000	65	0.55	0.31	0.27	0.24	0.19
	1200	80	0.67	0.38	0.33	0.29	0.23
	1500	102	0.85	0.49	0.43	0.37	0.29

Direct/Indirect Electrical Data (Amps)*							
Lumen Package (ft.)	Lumen Package	Wattage	120V	208V	240V	277V	347V
1	700/700	15	0.13	0.07	0.06	0.05	0.04
	1000/1000	25	0.21	0.12	0.1	0.09	0.07
2	700/700	25	0.21	0.12	0.1	0.09	0.07
	1000/1000	35	0.29	0.17	0.15	0.13	0.1
	1200/1200	42	0.35	0.2	0.17	0.15	0.12
3	1500/1500	53	0.44	0.26	0.22	0.19	0.15
	700/700	36	0.3	0.17	0.15	0.13	0.1
	1000/1000	51	0.43	0.25	0.21	0.18	0.15
	1200/1200	62	0.51	0.3	0.26	0.22	0.18
4	1500/1500	78	0.65	0.38	0.33	0.28	0.23
	700/700	47	0.39	0.23	0.2	0.17	0.14
	1000/1000	65	0.55	0.31	0.27	0.24	0.19
	1200/1200	80	0.67	0.38	0.33	0.29	0.23
5	1500/1500	103	0.86	0.5	0.43	0.37	0.3
	700/700	58	0.48	0.28	0.24	0.21	0.17
	1000/1000	84	0.7	0.4	0.35	0.3	0.24
	1200/1200	104	0.87	0.5	0.43	0.38	0.3
6	1500/1500	130	1.08	0.63	0.54	0.47	0.37
	700/700	72	0.6	0.35	0.3	0.26	0.21
	1000/1000	102	0.85	0.49	0.43	0.37	0.29
	1200/1200	124	1.03	0.6	0.52	0.45	0.36
7	1500/1500	156	1.3	0.75	0.65	0.56	0.45
	700/700	82	0.68	0.39	0.34	0.3	0.24
	1000/1000	116	0.97	0.56	0.48	0.42	0.33
	1200/1200	140	1.17	0.67	0.58	0.51	0.4
8	1500/1500	182	1.52	0.88	0.76	0.66	0.52
	700/700	94	0.79	0.45	0.39	0.34	0.27
	1000/1000	131	1.09	0.63	0.55	0.47	0.38
	1200/1200	160	1.33	0.77	0.67	0.58	0.46
8	1500/1500	204	1.7	0.98	0.85	0.74	0.59


PRODUCT DIMENSIONS

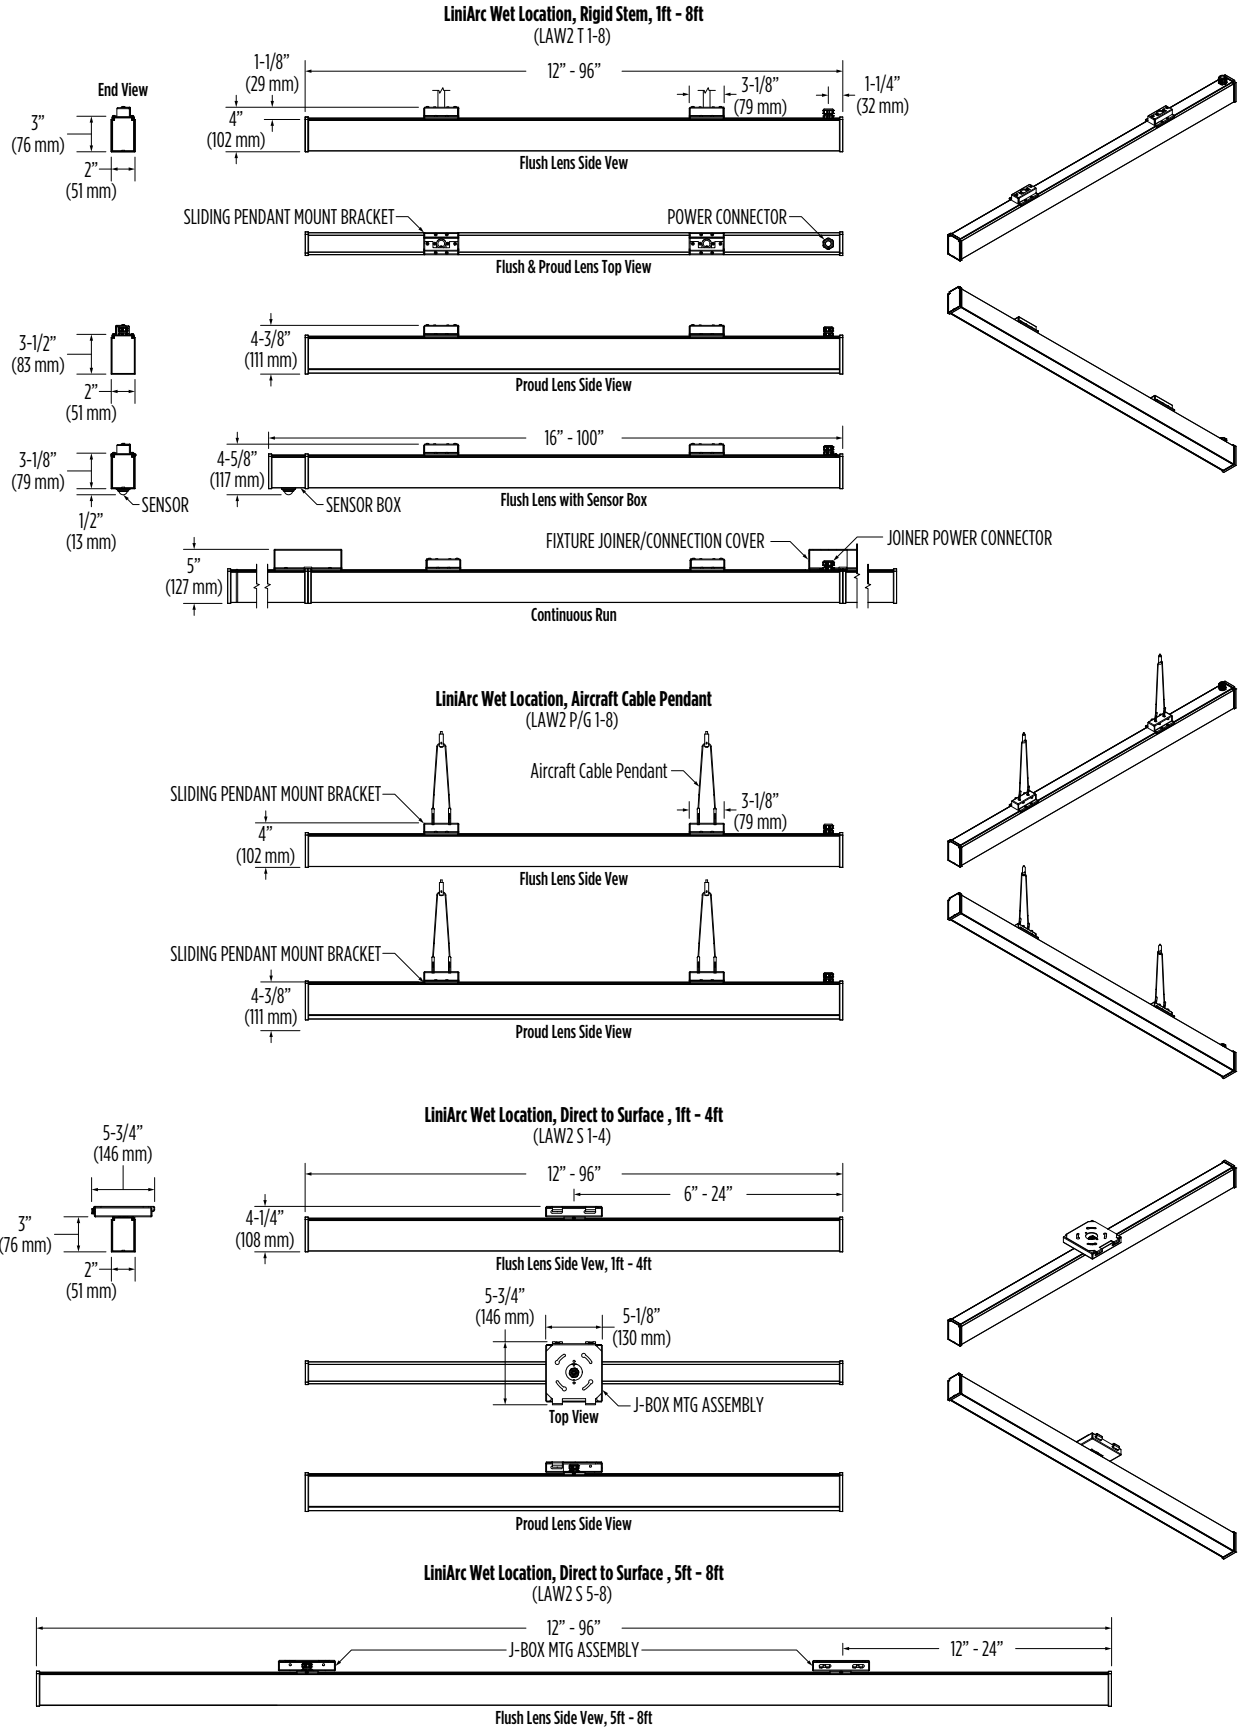

PRODUCT DIMENSIONS

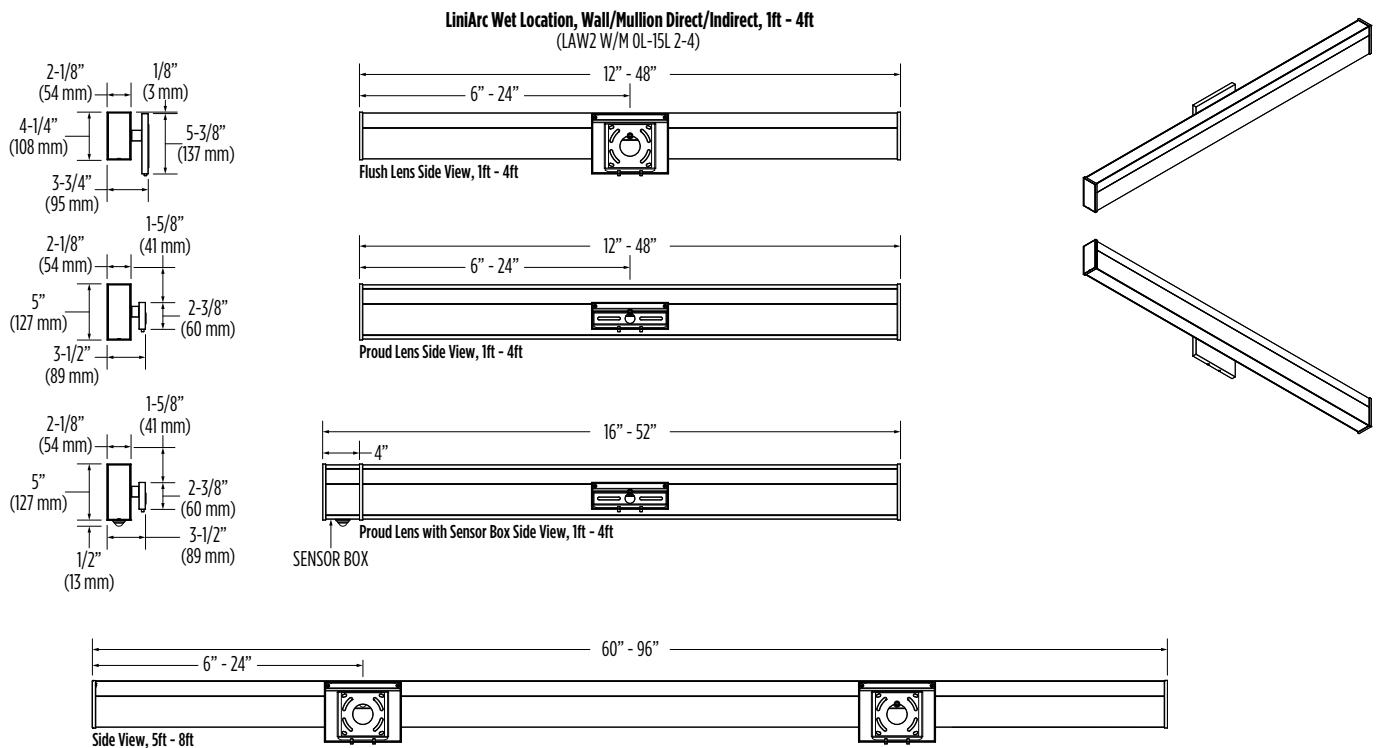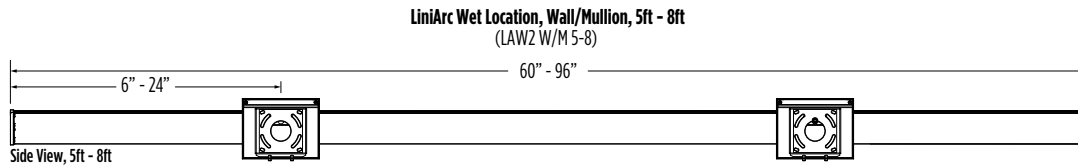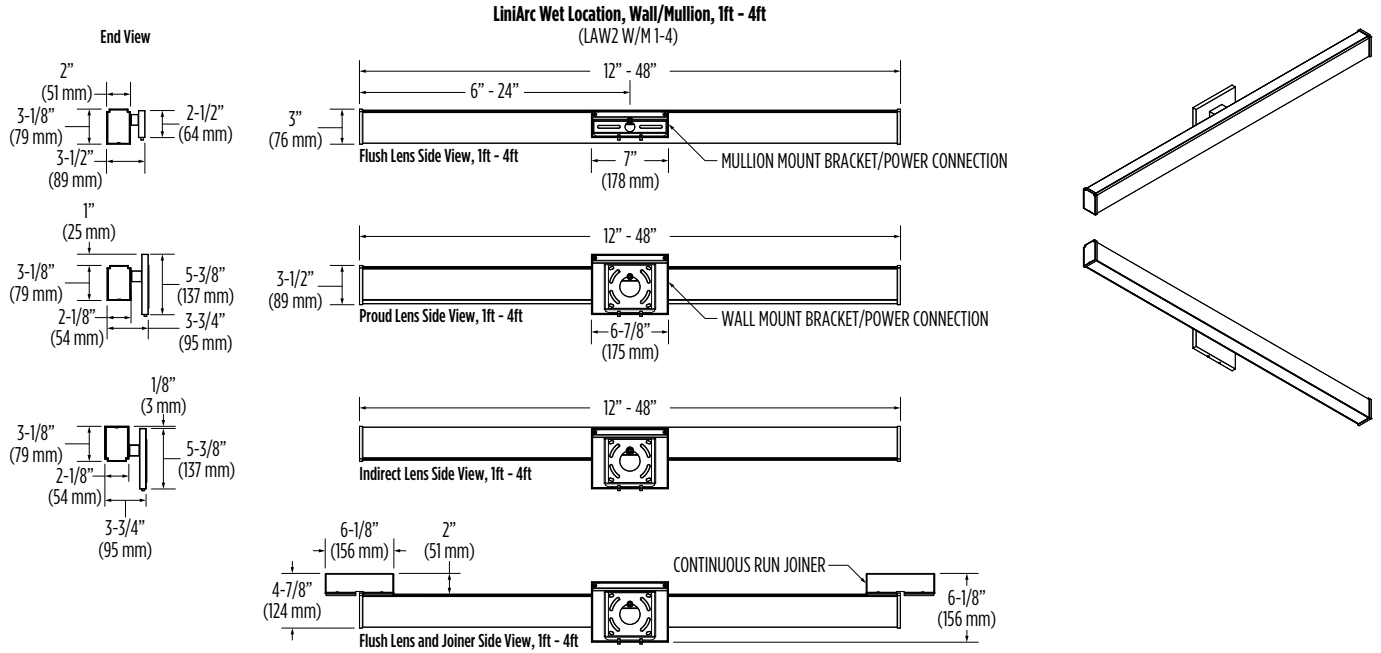

PRODUCT DIMENSIONS

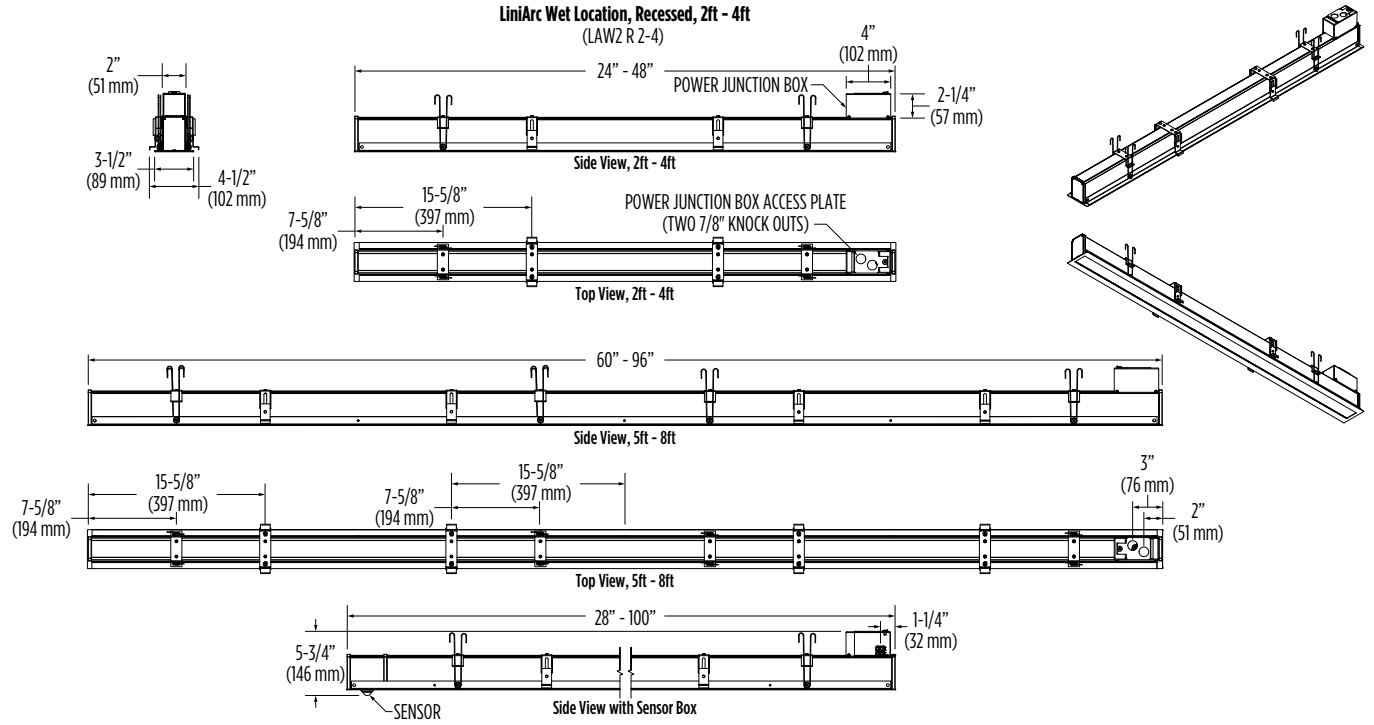

Shipping Weights - lbs (per ft.)		
Configuration	Unboxed	Boxed
Direct Only	3lbs per ft.	5lbs per ft.
Direct/Indirect	4lbs per ft.	6lbs per ft.