



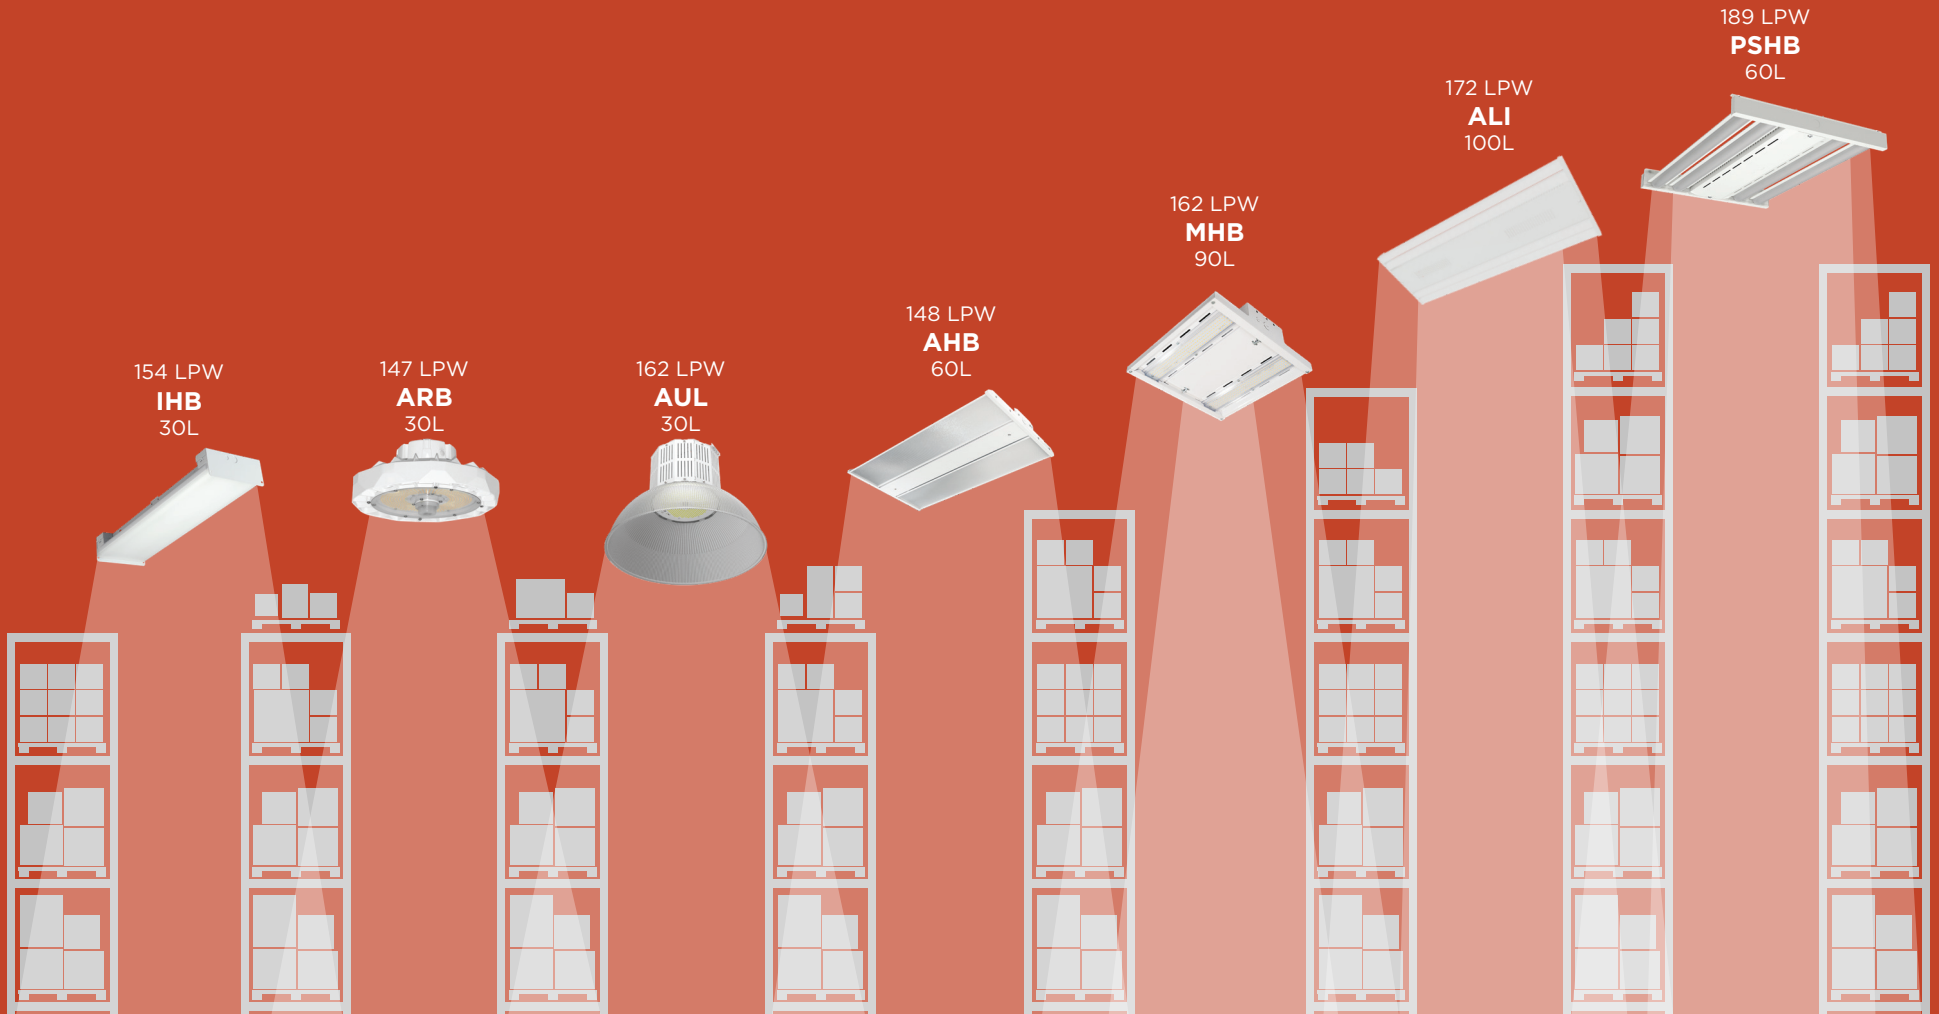

High Bay Position Guide

*Linear & Round High Bay
Fixtures for EVERY Application*

- Energy efficient, easy contractor-friendly lighting solutions
- Lightweight designs allow for minimal installation effort
- Form factor and lumen packages for every opportunity

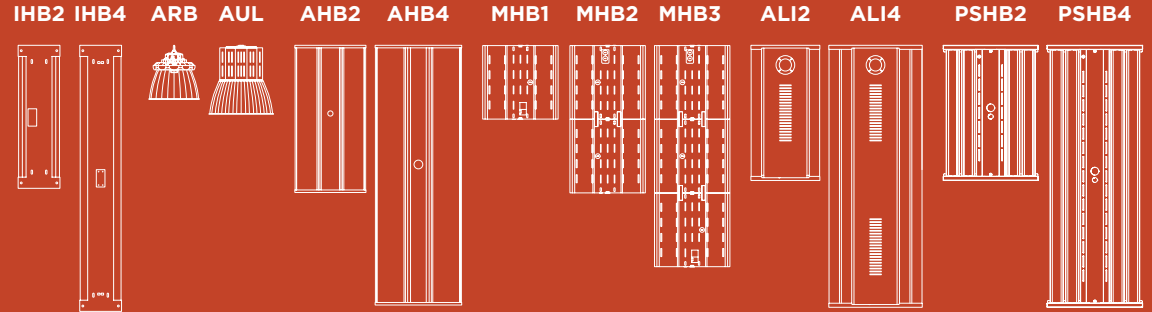

High Bay Position Guide



	Industrial Linear High Bay (IHB)	Advantage High Bay LED (AHB)	Modular High Bay Light (MHB)	Alliance High Bay (ALI)	Peak Series High Bay (PSHB)	Advantage Round High Bay (ARB)	Aureus LED Round High Bay (AUL)
	★★★	★★★	★★★★	★★★★★	★★★★★	★★★	★★★★★
Applications	Warehouse, Manufacturing, Service Bays, Retail	Warehouse, Manufacturing, Service Bays, Retail, Gymnasium	Warehouse, Manufacturing, Service Bays, Retail, Gymnasium	Warehouse, Manufacturing, Service Bays, Retail, Gymnasium	Warehouse, Manufacturing, Service Bays, Retail, Sports	Light Duty, Warehouse, Manufacturing, Retail, Gymnasiums	Light Duty, Warehouse, Manufacturing, Retail, Gymnasiums,
Finish Available	White	White	White	White	White	White, Black	White, Black, Silver, Custom
Sizes Available	2', 4'	2', 4'	1', 2', 3' length	2', 4'	2', 4'	12" Diameter	15" Diameter
Mounting Height	Up to 40'	Up to 60'	Up to 60'	Up to 90'	Up to 60'	Up to 40'	Up to 40'
Delivered Lumens	9,000 to 30,000	18,000 to 60,000	12,000L to 90,000L	12,000 to 100,000	12,000 to 60,000	18,000 to 30,000 (Selectable)	6,000 to 30,000
CCT	4000K, 5000K	4000K, 5000K	4000K, 5000K	4000K, 5000K	4000K, 5000K	4000K, 5000K	3000K, 3500K, 4000K, 5000K
LPW	Up to 154 LPW	Up to 138 LPW	Up to 162 LPW	Up to 172 LPW	Up to 189 LPW	Up to 147 LPW	Up to 162 LPW
Temperature Rating	Up to 55C	Up to 50C	Up to 50C	Up to 60C	Up to 60C	50C	50C
Listings	Damp Location	Damp Location	Damp Location	Damp Location	Damp Location, IK06	Wet Location, IP65, IK08	Damp Location
DLC	Premium	Premium	Standard	Premium	Standard	Premium	Premium
Optics Options	No Lens, Acrylic (Diffuse)	Acrylic (Frosted)	Polycarbonate (Clear, Diffuse)	No Lens, Acrylic (Clear, Diffuse)	No Lens, Flat Acrylic, Curved Acrylic, Flat Polycarbonate (Clear and Diffuse for all)	Open w/Reflector (16")	Open w/Reflector (16" or 22")
Distributions	Wide (120)	Wide (120)	Wide (120), Narrow (30)	Wide (120), Narrow (30)	Field Rotatable LEDs (0-180 degree rotation), Aisle Optic (30)	Wide (120)	General
Voltage Range	120V-277V, 347V-480V	120V-277V, 347V-480V	120V-277V, 347V-480V	120V-277V, 347V-480V	120V-277V, 347V-480V	120V-277V, 347V-480V	120V-277V, 347V-480V
Battery Backup	Yes	Yes	Yes	Yes	120V-277V (up to 30W), 347V-480V (30W only)	Yes	Yes
Controls/Sensors	Simple Sensor (OMS only), Basic Bluetooth	Simple Sensor, Basic Bluetooth	Simple Sensor (OMS Only), Basic Bluetooth, AirLink Blue	Simple Sensor (OMS only), Basic Bluetooth, AirLink Blue, AirLink Synapse	Simple Sensor (OMS Only), Basic Bluetooth, AirLink Blue, AirLink Synapse	Simple Sensor (OCMS only)	Basic Bluetooth, AirLink Blue, AirLink Synapse
Pricing	\$\$	\$	\$\$	\$\$\$	\$\$\$	\$\$	\$\$\$

† Not all versions of this product may be qualified. Please check the DLC Qualified Products List at www.designlights.org/OPL to confirm which versions are qualified.

