



LED TRADITIONAL WALLPACKS (SWPL)



CONSTRUCTION: Precision die-cast aluminum housing with stainless steel hardware, tempered borosilicate glass refractor and ingress resistant gasket. Knock-out on housing for available button photocell accessory

LEDs: Select High-performance LEDs. Color temperature available in 5000K and 4000K

CRI: Reference below Technical / Lumen Output chart

ELECTRICAL: Class 2 driver has universal voltage (120-277V, 50/60 Hz) input. 10Kv surge protection standard.

DIMMING: 0-10 volt dimming, standard

OPERATING TEMPERATURE: -35° through 40°C (-31° through 104°F)

PHOTOCELL: 120-277 photocell standard with cover.

PHOTOMETRICS: Please visit our web site at www.lsi-industries.com for detailed photometric data

DISTRIBUTION: Highly specular forward throw reflector


FINISH: Chip and fade resistant powder coat finish

INSTALLATION: Luminaire features a back plate designed to be easily mounted to a 4" square electrical junction box

EXPECTED LIFE: Minimum 50,000 hours

WARRANTY: Limited 5-year warranty

LISTING: UL listed to U.S. and Canadian safety standards. Suitable for wet locations. For a list of the specific products in this series that are DLC listed, please consult the LED Lighting section of our website or the Design Lights website at www.designlights.org

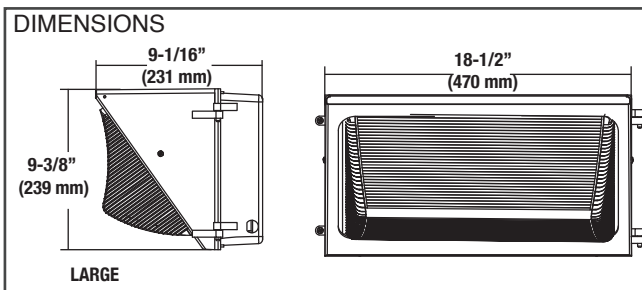

TECHNICAL INFORMATION

SWPL	PL1	
Color Temperature	4000K	5000K
System Wattage	90w	90w
Replaces	400w HID	400w HID
Lumens	9,191 lms	9,364 lms
Lumens Per Watt	91 lpw	92 lpw
CRI	80	80
Dimensions (Inches)	9.4" x 18.5" x 9.1"	
Weight	11.64 lbs.	





LED TRADITIONAL WALLPACKS (SWPL)


LUMINAIRE ORDERING INFORMATION

TYPICAL ORDER EXAMPLE: **SWPL WB LED PL1 40 UE BRZ PD**

Prefix	Distribution	Light Source	Drive Current	Color Temperature	Input Voltage	Finish ¹	Controls
SWPL (Large LED Wall Pack)	WB-Wide Beam Flood	LED	PL1 - Performance Level 1	40 - 4000K 50 - 5000K	UE - Universal Voltage (120-277V)	BRZ - Bronze	PD - PhotoCell Dimming

1- Other finishes available. Consult factory for other finishes and lead times.

ACCESSORIES ORDERING INFORMATION	
Order Number	Description
SWPLWG - Large Wire Guard	

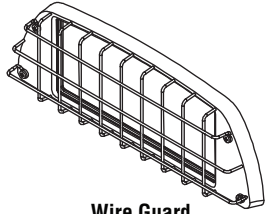

Wire Guard

BUG Listing

SWPL - TYPE WB

Perform. Level	Color Temp.*	Lumens	Watts	LER	BUG Rating
PL1	40	9194	101	91	B2-U5-G4
	50	9235	102	91	B2-U5-G4

* Color Temperature: 40-4000K, 50-5000K



Project Name _____ Fixture Type _____ Cat# _____