

WALL SWITCH MOMENTARY 24V SELF GROUNDING (WS MNT 24V WH)




FEATURES

- 3 Amp
- 24 Volt
- Decora Plus Rocker Double-Throw Ctr-OFF Momentary Contact
- Single-Pole
- AC Quiet Switch
- Commercial Grade
- Self Grounding
- Back & Side Wired

SPECIFICATIONS

ELECTRICAL	
Power Consumption	3A, 24V
Ground	Self Grounding
PHYSICAL	
Dimensions	TOTAL: 4.06" (103.2mm) H x 1.3" (33.0mm) W
Actuator and Body Material	Thermoplastic
OTHER	
Warranty	Limited Ten-Year Warranty

DIMENSIONS

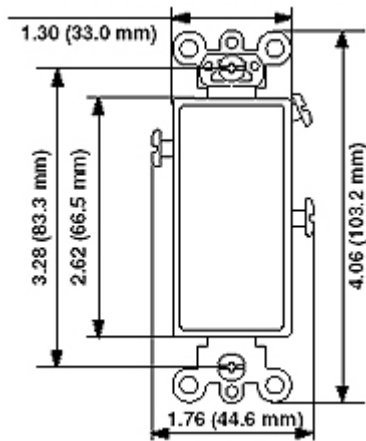

OPTIMAL LED DESIGN

Exclusive LED High Inrush Stability (H.I.S.) circuitry designed to handle the high inrush electronic ballast loads of today's LED lighting and offer unmatched durability and service. Our true Zero-Cross Relay switches are at the zero crossing point of the AC power curve, ensuring maximum contactor life and compatibility with LED ballasts.

ORDERING INFORMATION

PART NO.	CAT. NO.	DESCRIPTION
672539WH	WS MNT 24V WH	Wall Switch Momentary 24V Self Grounding



Project Name _____ Catalog # _____

1-800-436-7800 (Support, Option 8) www.lsi-industries.com

© 2018
LSI INDUSTRIES INC.