

# INSTALLATION AND ASSEMBLY INSTRUCTIONS


## PQMH and PQM15 MOUNT BRACKETS FOR SQUARE AND ROUND POLES

Read these instructions completely and carefully, observing all CAUTIONS and WARNINGS shown throughout these instructions.


**WARNING! RISK OF ELECTRIC SHOCK**

- Disconnect or turn off power before installation or servicing.
- Verify that supply voltage is correct by comparing it with the luminaire label information.
- Make all electrical and grounded connections in accordance with the National Electrical Code (NEC) and any applicable local code requirements.


1. You will also need to use the installation instructions included with the luminaire.
2. These installation instructions cover both PQMH and PQM15 bracket models for square and round poles.  
PQMH and PQM15 for square and round poles can be used on poles drilled within the mounting pattern shown in figure below.

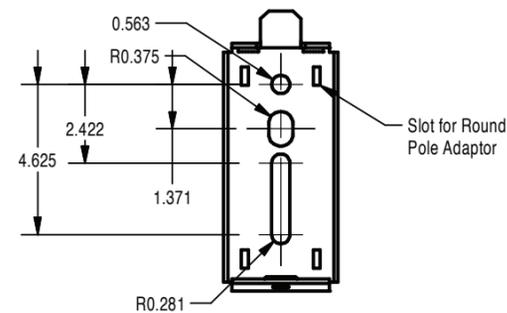


3. Position the Luminaire Bracket, square and straight, up against the luminaire mounting surface.  
HEX bolt head is always on the PQMH and PQM15 side  
Secure using supplied hardware.  
Torque to 25 FT-LBS.

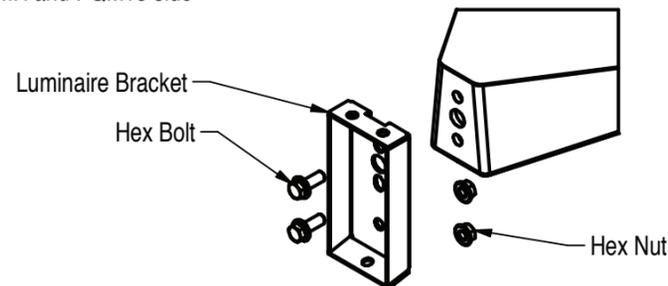


4. Position and align Pole Bracket, square and straight, against pole holes.  
HEX bolt head is always on the PQMH and PQM15 side. Secure using supplied hardware and Pole  
Secure using supplied hardware.  
Torque to 25 FT-LBS.

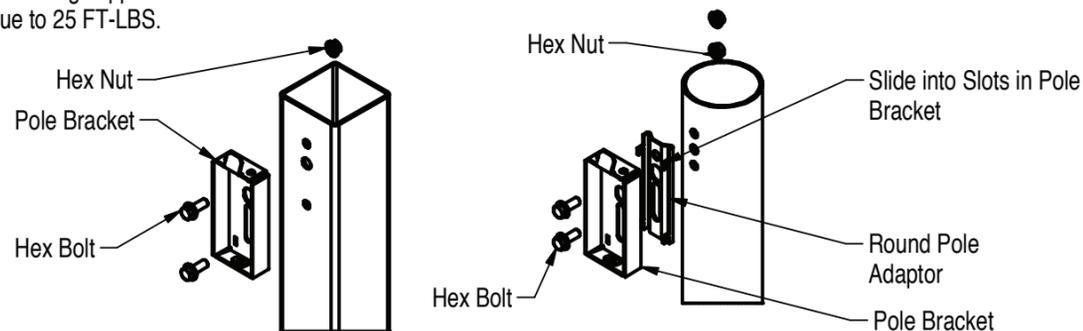

5. Tilt luminaire upwards and hook it onto the pole mount bracket.  
Allow the luminaire to rotate downwards, making sure upper lip and slot of both brackets are fully engaged and no wires are pinched.

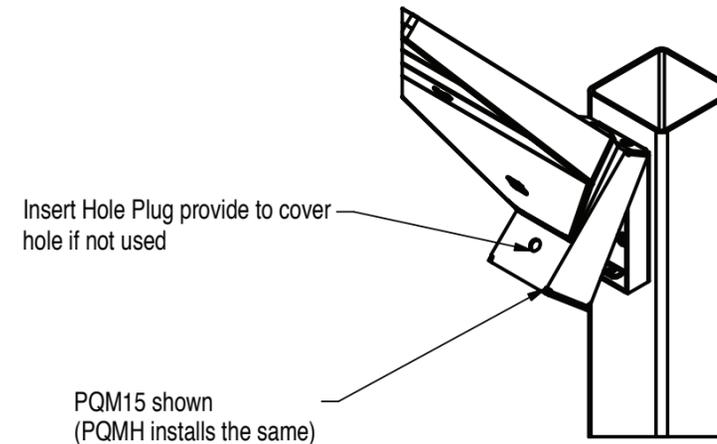

6. Refer to Luminarie installation instructions for wiring details and method.
7. Install the 3/8-16 bolts, flat washers and lock washers.  
Secure using supplied hardware.  
Torque to 15 FT-LBS.

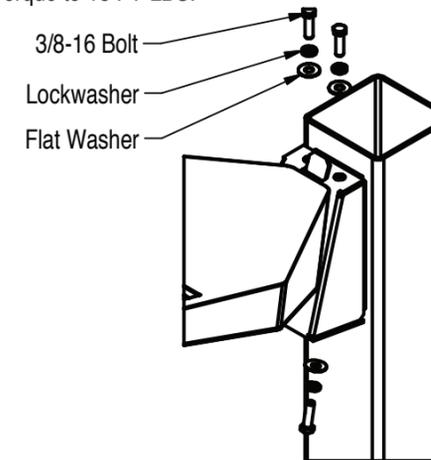

INSTALLATION QUESTIONS  
CALL LSI FIELD SERVICE DEPT.  
800-436-7800 EXT. 3300